

STANDARD DEPARTURE CHART-INSTRUMENT

RJTL / SHIMOFUSA

SID

UTSUNOMIYA ONE DEPARTURE

RWY01 : Climb RWY HDG to SHT 2.0DME, ...

RWY19 : Climb RWY HDG to SHT 2.5DME, turn left HDG 331° to intercept and proceed...
...via SHT R016 to GAMAR, turn left ,via JDT R161 to JDT TACAN.


Cross GAMAR at or above 5000FT.

Note RWY01 : 5.0% climb gradient required up to 600FT.

OBST ALT 251FT located at 1.56NM 020° FM end of RWY01.

RWY19 : 5.0% climb gradient required up to 700FT.

OBST ALT 314FT located at 1.67NM 161° FM end of RWY19.

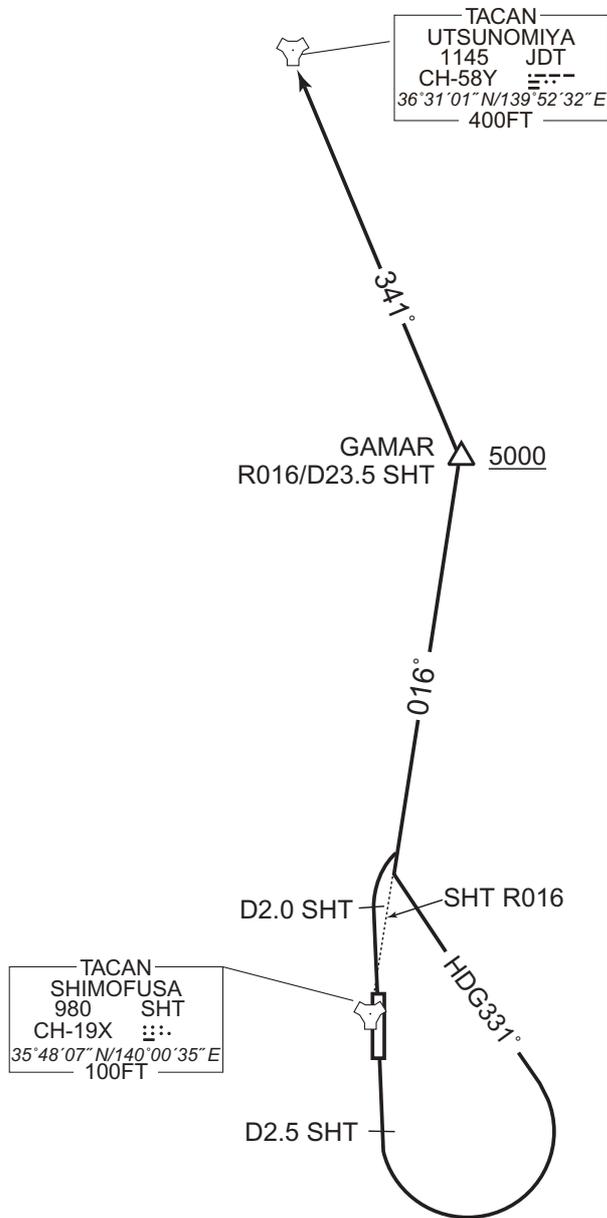

CHANGE: New PROC.