
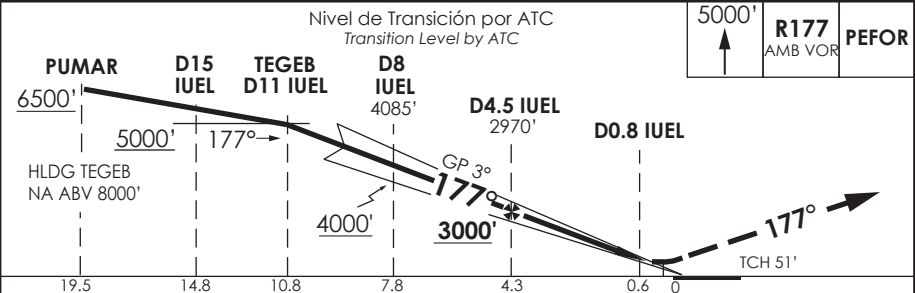


ATIS	SANTIAGO RADAR	TORRE SANTIAGO	CONTROL TERRESTRE
132.1	Santiago Radar 119.7/129.7	Santiago Tower 118.1/118.35	Ground Control
LOC IUEL	FINAL APCH CRS	GP D4.5 IUEL	ILS DA (H)
110.3	177°	3000'	1750' (200')
APCH FRUSTRADA: Ascenso a 5000' R177 VOR AMB directo PEFOR, ingrese HLDG 357° izquierdo o según autorización ATC.			AD Elev. 1555'
Missed Apch: Climb to 5000' on R177 AMB VOR direct to PEFOR, enter on HLDG 357° left or according to ATC clearance.			THR 17L Elev. 1550'
			19000 FT
			MSA 25 NM AMB

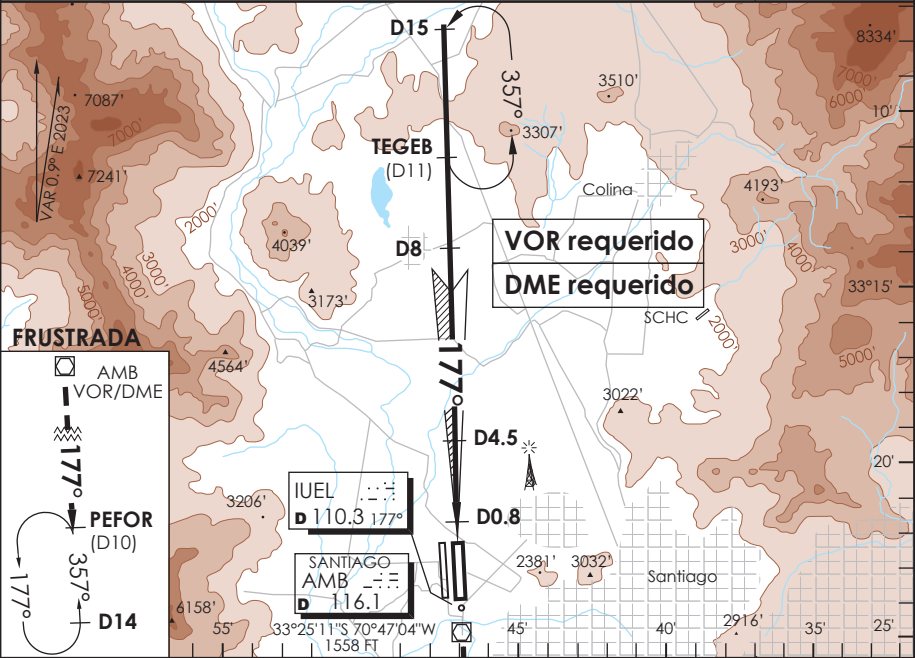

C A T E G O R Í A	DIRECTO RWY 17L <i>Straight in RWY 17L **</i>					CIRCULANDO <i>Circling</i>	ALTN <i>Alternate Minimums</i>	
	ILS DA 1750' (200')			LOC 1980' (430')				
	ALSIF-2		WO ALSIF-2	MDA				
	TDZL y RCLL	WO TDZL o RCLL		ALSIF-2	WO ALSIF-2			
A	RVR 550m ○ 0.8 Km	RVR 550m*	1.2 Km	1.2 Km	1.6 Km	NA	VER PAG. GEN 2.19 <i>See page GEN 2.19</i>	
B		○		RVR 750m	1.6 Km			2.0 Km
C		○		0.8 Km	2.0 Km			2.4 Km
D		○		0.8 Km	2.0 Km			2.4 Km
* Ver página GEN 2.11 <i>See page GEN 2.11</i>			** WO IUEL DME PROC NA <i>PROCEDURE NOT AUTHORIZED WITHOUT IUEL DME</i>					
Veloc. Terrestre Kts		80	100	120	140	160		
GP 3° FPM		425'	531'	637'	743'	849'		
MIN:SEC (FAF to MAPt 3.8)		2:51	2:17	1:54	1:38	1:26		