

AERODROME CHART - ICAO

24°33'01"N
039°42'21"E

ELEV 2134


TWR 118.3 124.2
GND 121.9
ATIS 126.85

MADINAH / PRINCE MOHAMMAD BIN ABDULAZIZ INTERNATIONAL


VAR 4° E 2020
ELEV, ALT IN FEET
DIMENSIONS IN METERS
BRG ARE MAG
ANNUAL RATE OF CHANGE 3° E

| APRON | BEARING STRENGTH (PCN) | Surface |
|--------------------------|------------------------|----------|
| ACFT ISOLATION AREA | 59/F/A/W/T | CONCRETE |
| ALPHA CHECK PARKING AREA | 59/F/A/W/T | CONCRETE |
| EAST APRON | 85/R/A/W/T | CONCRETE |
| GENERAL AVIATION APRON | 59/F/A/W/T | CONCRETE |
| MILITARY APRON | 59/F/A/W/T | CONCRETE |
| REMOTE APRON | 59/F/A/W/T | CONCRETE |
| ROYAL APRON | 59/F/A/W/T | CONCRETE |
| WEST APRON | 59/F/A/W/T | CONCRETE |

NOTE:
REFER TO
AD2-OEJN-15 AND 17
FOR RWY AND EXIT TWY
LIGHTING AND MARKING AIDS



CHANGES: Chart updated.

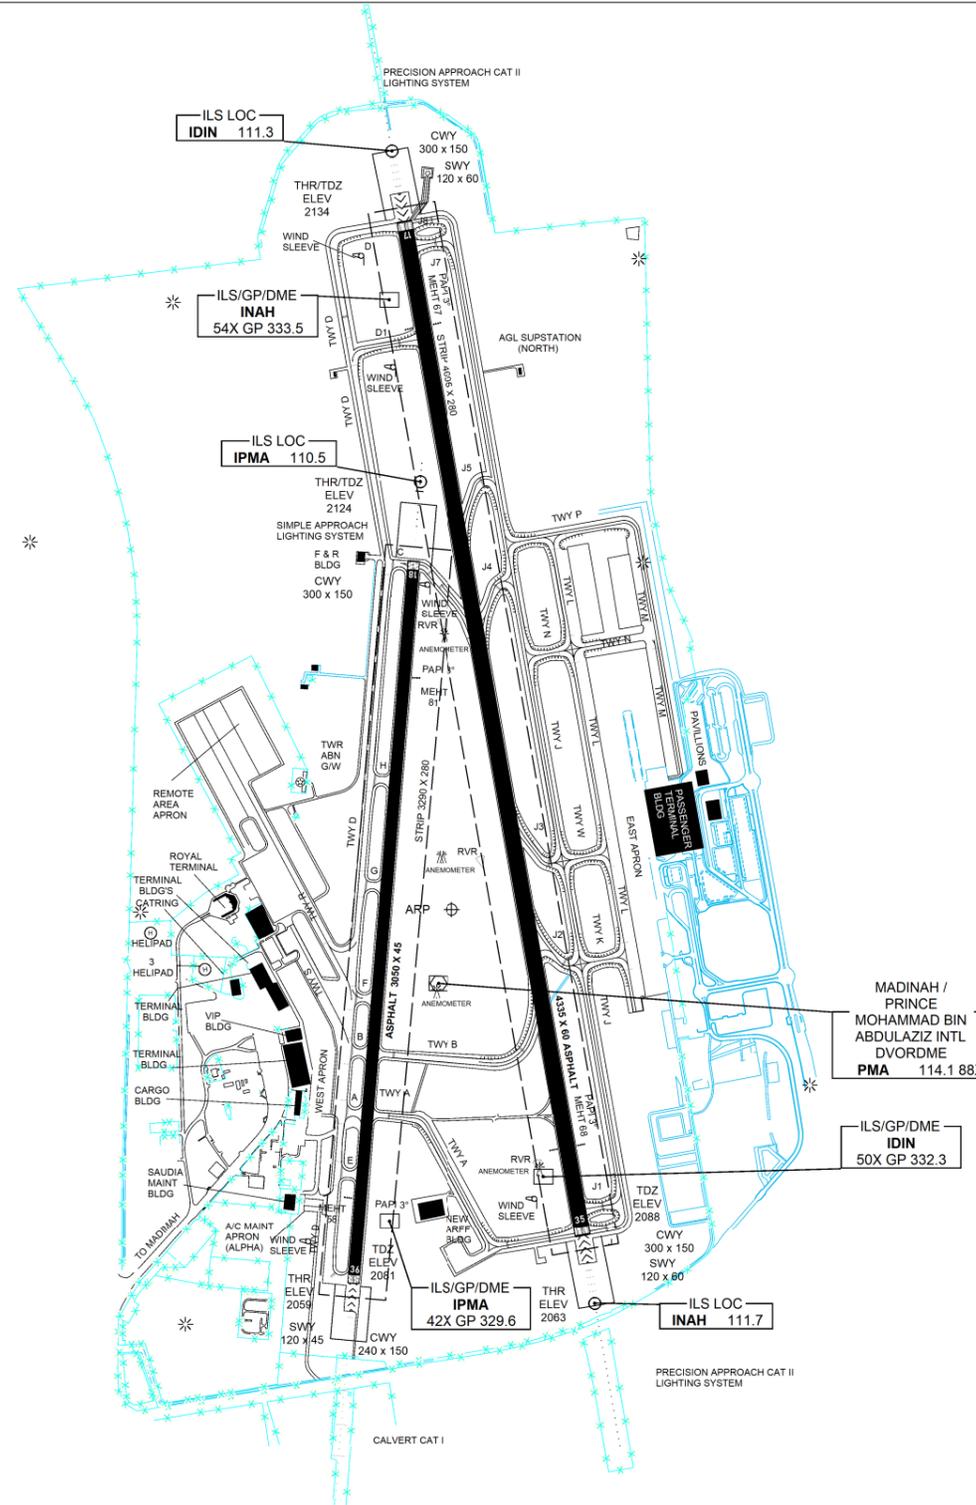

| RWY | DIRECTION | THR | THR GND | BEARING STRENGTH |
|-----|-----------|---------------------------|---------|---------------------------|
| 17 | 165° | 25°34'35"N 040°42'12"E | 30 | PCN 80 R/A/W/T ASPHALT |
| 35 | 345° | 25°32'17"N 040°42'41"E | 30 | PCN 80 R/A/W/T ASPHALT |
| 18 | 180° | 25°33'49"N 040°42'14"E | 30 | PCN 59 F/A/W/T ASPHALT |
| 36 | 360° | 25°32'10"N 040°42'07"E | 30 | PCN 59 F/A/W/T ASPHALT |

| TAXIWAY DESIGNATOR | Width | BEARING STRENGTH (PCN) | Surface |
|--------------------|-------|------------------------|---------|
| A | 25 | 65/F/A/W/T | ASPHALT |
| B | 25 | 65/F/A/W/T | ASPHALT |
| C | 25 | 65/F/A/W/T | ASPHALT |
| D | 23 | 59/F/A/W/T | ASPHALT |
| D1 | 25 | 65/F/A/W/T | ASPHALT |
| E | 23 | 59/F/A/W/T | ASPHALT |
| F | 23 | 59/F/A/W/T | ASPHALT |
| G | 23 | 59/F/A/W/T | ASPHALT |
| H | 23 | 59/F/A/W/T | ASPHALT |
| J | 25 | 100/F/A/W/T | ASPHALT |
| J1 | 25 | 100/F/A/W/T | ASPHALT |
| J2 | 25 | 100/F/A/W/T | ASPHALT |
| J3 | 25 | 100/F/A/W/T | ASPHALT |
| J4 | 25 | 100/F/A/W/T | ASPHALT |
| J5 | 25 | 100/F/A/W/T | ASPHALT |
| J7 | 25 | 100/F/A/W/T | ASPHALT |
| J8 | 25 | 100/F/A/W/T | ASPHALT |
| K | 25 | 100/F/A/W/T | ASPHALT |
| L | 25 | 100/F/A/W/T | ASPHALT |
| M | 25 | 100/F/A/W/T | ASPHALT |
| N | 25 | 100/F/A/W/T | ASPHALT |
| P | 25 | 100/F/A/W/T | ASPHALT |
| R | 25 | 59/F/A/W/T | ASPHALT |
| S | 25 | 59/F/A/W/T | ASPHALT |
| W | 25 | 100/F/A/W/T | ASPHALT |

| LEGEND | |
|-----------------------------------|--|
| WIND SHEAR SENSOR | |
| RWY VISUAL RANGE (RVR) | |
| WIND DIRECTION INDICATOR | |
| HELIPAD | |
| SERVICE ROAD | |
| FENCE | |
| RUNWAY-HOLDING POSITION PATTERN A | |
| INTERMEDIATE HOLDING POSITION | |