


NOVOSIBIRSK, RUSSIA
TOLMACHEVO
ILS X CAT I RWY 25

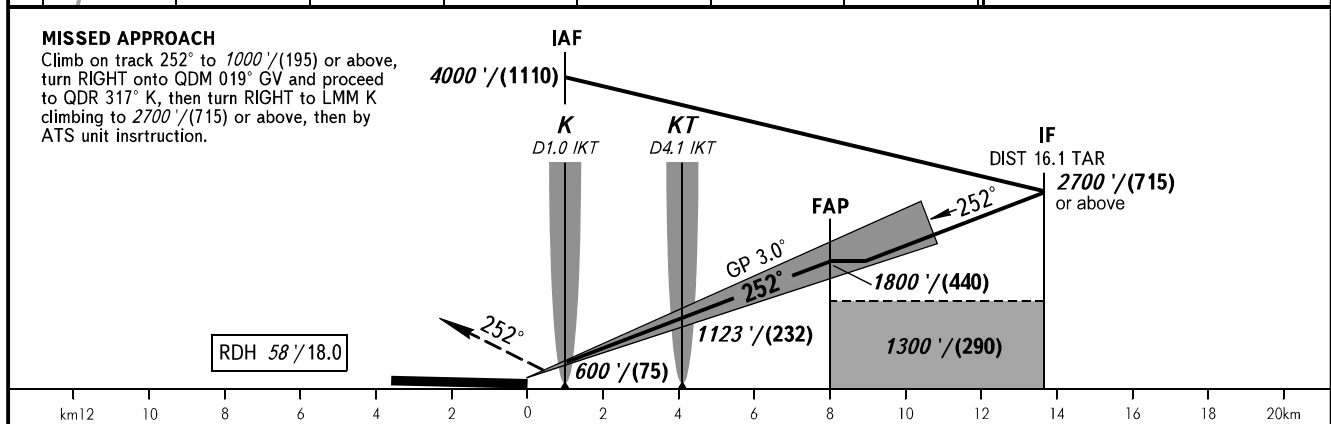

OCA(H)		A	B	C	D	① TRANSITION LEVEL: - FL070 when QNH is 1013 hPa (760mm mercury column) or above; - FL080 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column); - FL090 when QNH is less than 977 hPa (733mm mercury column). WARNING: 1. The approach procedure shall be used by arrangement with ATS unit. 2. Holding area shall be used, if clearance to cross UNR1187 (during its activity), UNP256 or arrangement with ATS unit are AVBL. 3. ILS DME IKT reads zero at RWY 25 THR.							
Straight-in Approach	CAT I	502' (139') (43)	510' (147') (45)	522' (159') (49)	537' (174') (54)								
		NOTE TAR distance is indicated from VORDME.											
GROUND SPEED		km/h	150	180	210	240	270	300	330	360	390	420	450
		kt	81	97	113	130	146	162	178	194	211	227	243
RATE OF DESCENT		m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6	6.1	6.5
		ft/min	427	512	597	682	768	853	938	1024	1109	1194	1280

CHANGE: FAP, IF, UNR1926