
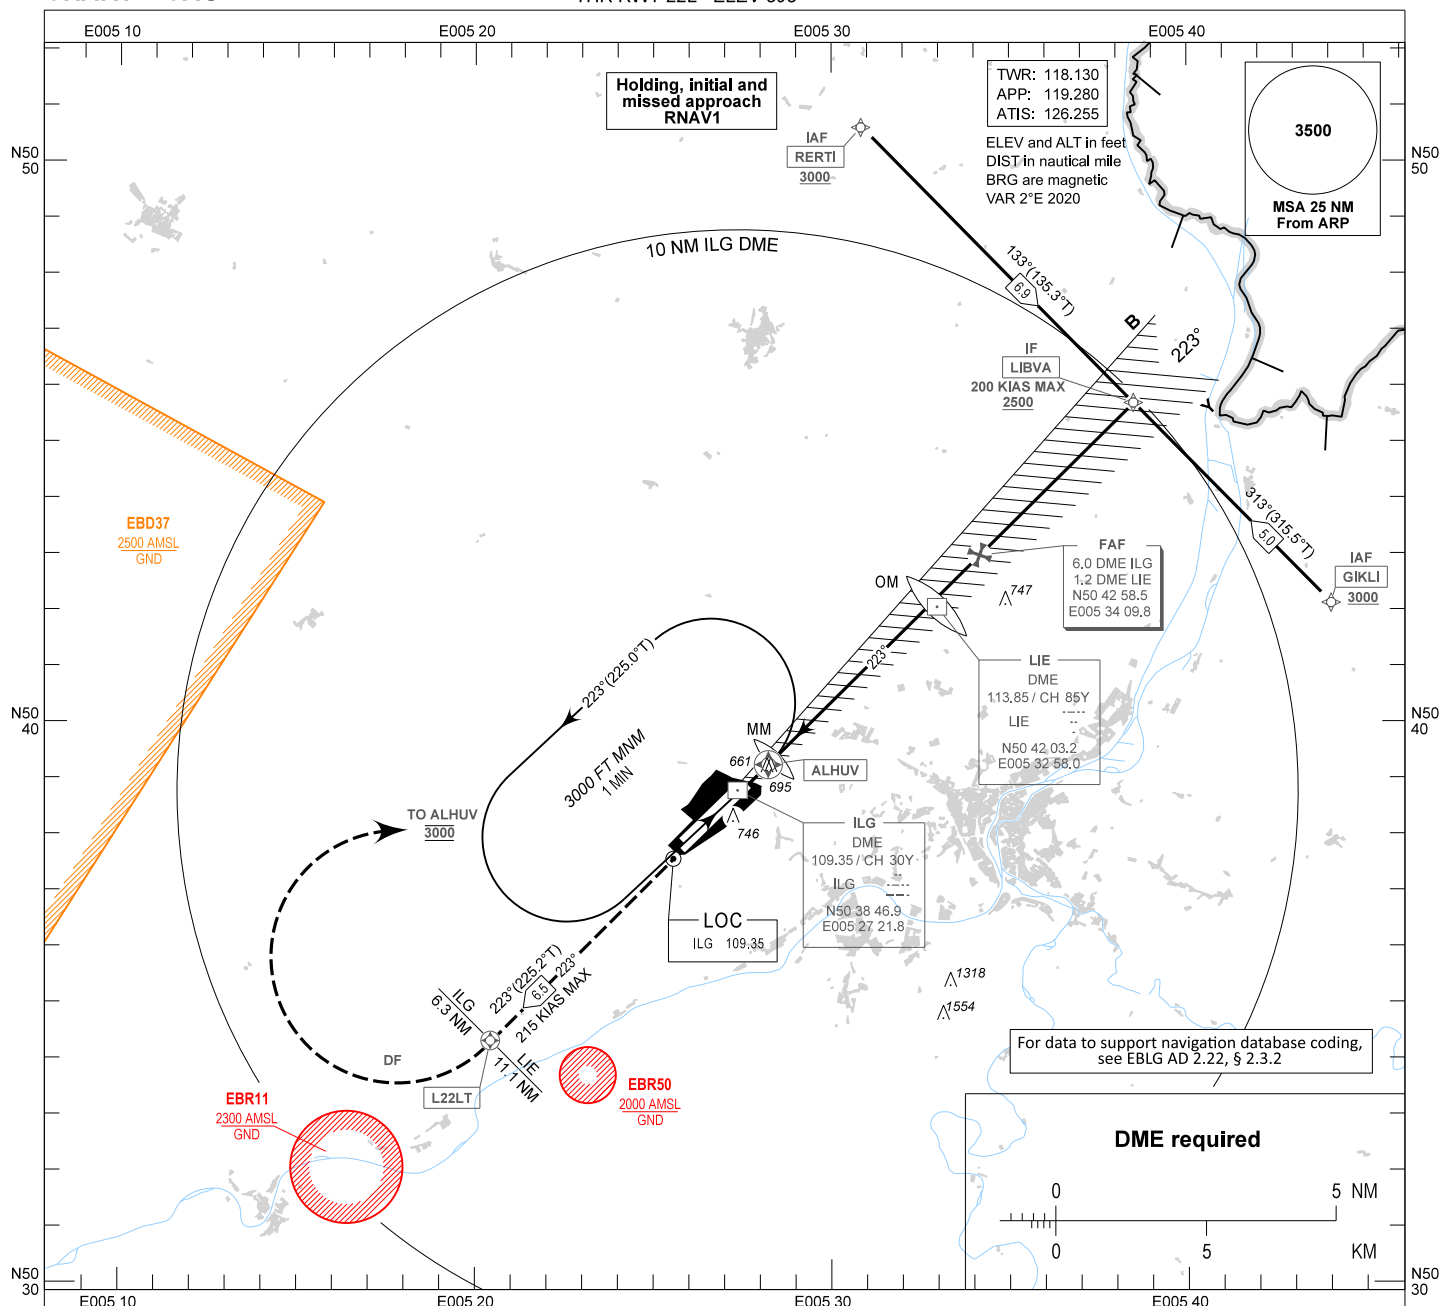
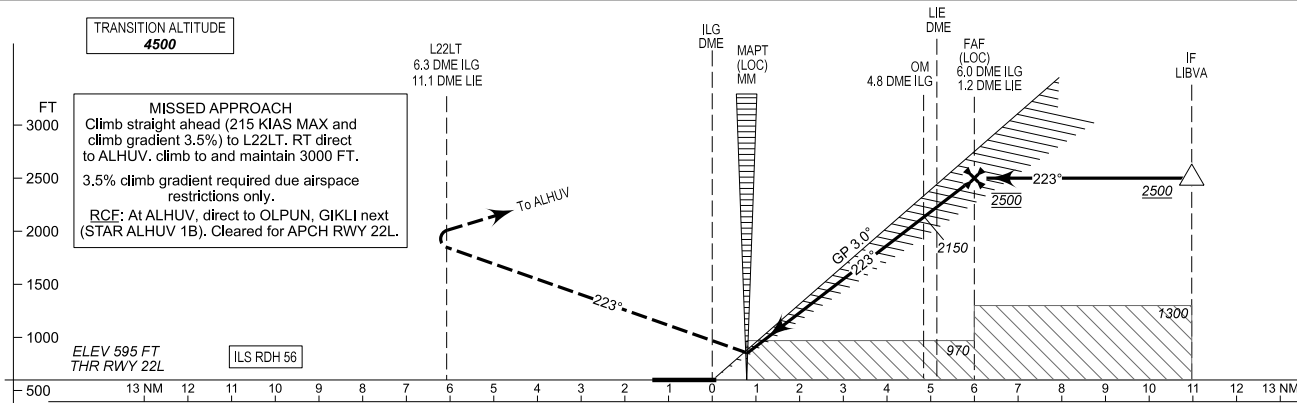


INSTRUMENT APPROACH
CHART - ICAOAD ELEV 651
OCH RELATED TO
THR RWY 22L - ELEV 595LIÈGE / Liège (EBLG)
ILS CAT II & III or LOC RWY 22L

DME required



OCA (OCH)

CAT of ACFT	A	B	C	D
ILS CAT I	795 (200)	795 (200)	795 (200)	795 (200)
ILS CAT II	650 (55)	661 (66)	674 (79)	686 (91)
LOC	970 (370)	970 (370)	970 (370)	970 (370)

AD OPR MNM: 125 M RVR

FAF to MAPT - 5.2 NM

Speed (GS)	KT	70	90	120	150	180
Rate of descent	FT/MIN	375	480	640	800	960
PROCEDURE ALTITUDES						
DME ILG	6.0	5.9	4.9	3.9	2.9	1.9
DIST THR	5.8	5.7	4.7	3.7	2.7	1.7
Altitude	2500	2460	2150	1830	1510	1190