



D-ATIS 135.1
CLNC DEL 126.05
CPDLC
GND CON
121.9 348.6
NASHVILLE TOWER
118.6 257.8
NASHVILLE DEP CON
119.35 372.0

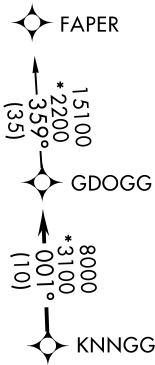

TOP ALTITUDE:
4000

TAKEOFF MINIMUMS:
Rwys 2C, 2L, 2R, 13, 20L, 31: Standard
with minimum climb of 500' per NM to 1100.
Rwys 20C, 20R: Standard with minimum climb
of 500' per NM to 1300.

- NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: Radar required.
NOTE: For Turbojet aircraft only.
NOTE: Transponder code will be issued via
PDC or Nashville clearance delivery.
NOTE: If unable to accept climb rates,
advise ATC on initial contact.



NOTE: Chart not to scale.

- ▼

DEPARTURE ROUTE DESCRIPTION
- TAKEOFF RWYS 2L/C/R: Climb heading 021° or assigned ATC heading, thence....
TAKEOFF RWY 13: Climb heading 136° or assigned ATC heading, thence....
TAKEOFF RWYS 20L/C/R: Climb heading 201° or assigned ATC heading, thence....
TAKEOFF RWY 31: Climb heading 316° or assigned ATC heading, thence....

....expect radar vectors to KNNGG, then on track 001° to GDOGG. Maintain 4000.
Expect clearance to filed altitude within five (5) minutes after departure.

FAPER TRANSITION (GDOGG3.FAPER)

SE-1, 20 MAR 2025 to 17 APR 2025

SE-1, 20 MAR 2025 to 17 APR 2025