

# TBIRD SIX DEPARTURE (RNAV) Departure Routes

PALM BEACH DEP CON  
128.3 317.4  
D-ATIS  
123.75  
CLNC DEL  
121.6 284.6  
CPDLC  
GND CON  
121.9 284.6  
PALM BEACH TOWER  
119.1 257.8


RNAV 1 - DME/DME/IRU or GPS.

RADAR required for non-GPS equipped aircraft.

**TOP ALTITUDE:  
11000**

See following page for transition routes.

TBIRD 

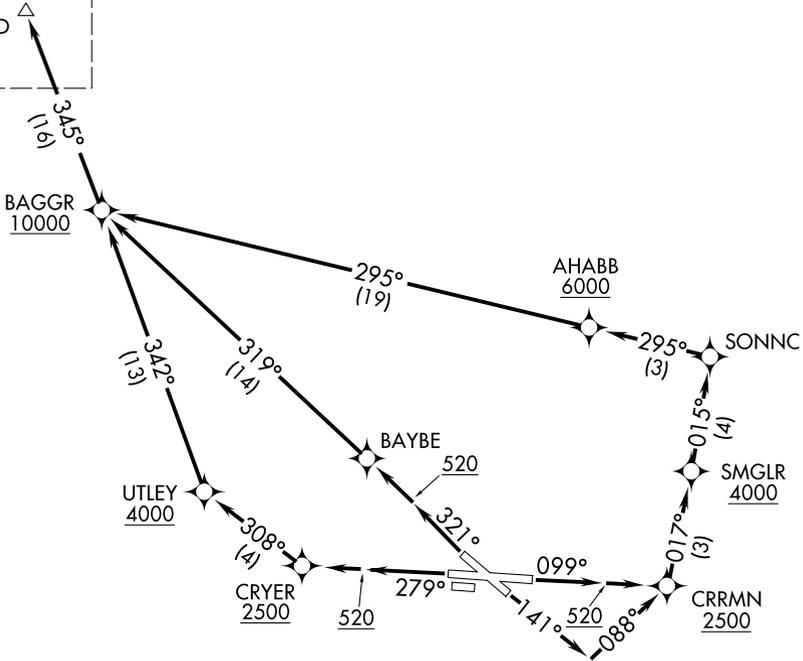

### TAKEOFF MINIMUMS


Rwys 10L, 14, 28R, 32: Standard with minimum climb of 500'/NM to 520.

NOTE: Jets aircraft only.

NOTE: CHEFS Transition, for use by MCO or DAB area arrivals.

NOTE: All aircraft: Climb gradients: If unable to accept climb rate advise ATC prior to departure.

NOTE: MATLK Transition for use by aircraft filed to Jacksonville area airports only, or as assigned by ATC.



NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)