AERODROME CHART-ICAO

ARP 380904N 0212532E AD ELEV 14M / 46FT ARAXOS / Araxos Airport

-ELEVATIONS AND DIMENSIONS ARE IN METRES
-BEARINGS ARE MAGNETIC
-COORDINATES IN WGS' 84

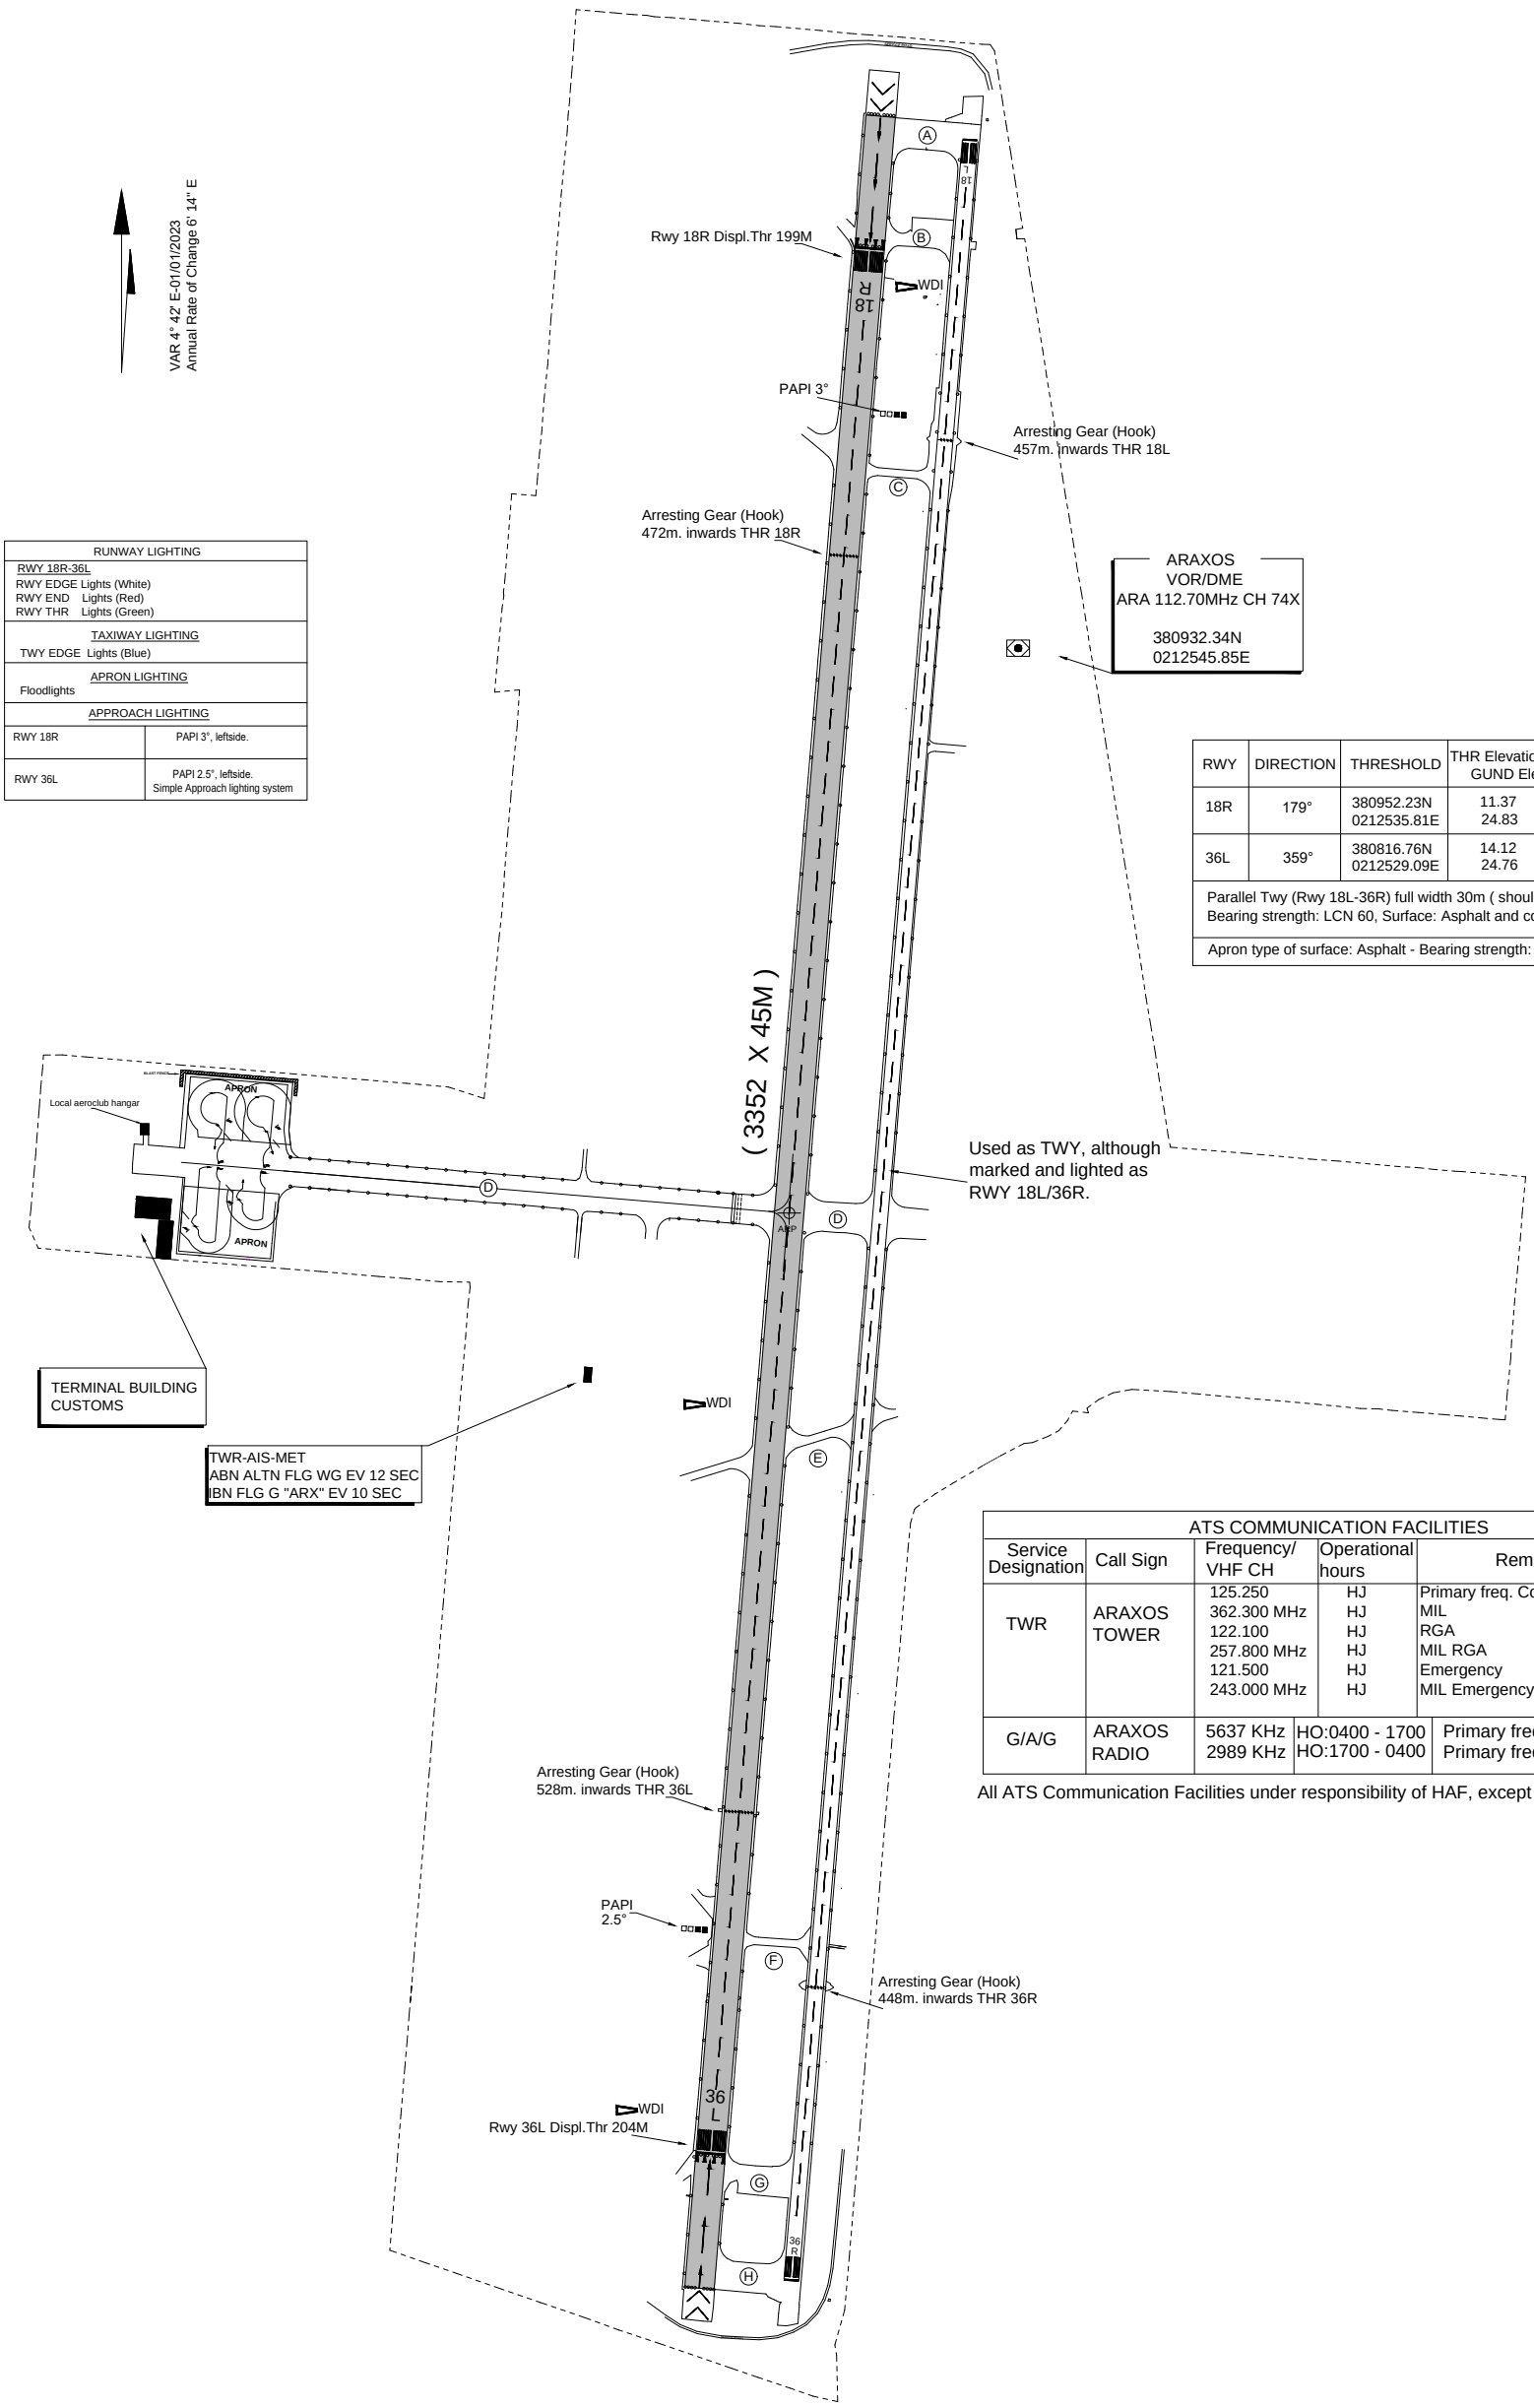

RUNWAY LIGHTING	
RWY 18R-36L	
RWY EDGE Lights (White)	
RWY END Lights (Red)	
RWY THR Lights (Green)	
TAXIWAY LIGHTING	
TWY EDGE Lights (Blue)	
APRON LIGHTING	
Floodlights	
APPROACH LIGHTING	
RWY 18R	PAPI 3°, leftside.
RWY 36L	PAPI 2.5°, leftside. Simple Approach lighting system

RWY	DIRECTION	THRESHOLD	THR Elevation (AMSL) GUND Elevation	BEARING STRENGTH
18R	179°	380952.23N 0212535.81E	11.37 24.83	LCN 45 Asphalt and concrete
36L	359°	380816.76N 0212529.09E	14.12 24.76	
Parallel Twy (Rwy 18L-36R) full width 30m (shoulders incl.). Bearing strength: LCN 60, Surface: Asphalt and concrete.				
Apron type of surface: Asphalt - Bearing strength: LCN 45				

ATS COMMUNICATION FACILITIES				
Service Designation	Call Sign	Frequency/ VHF CH	Operational hours	Remarks
TWR	ARAXOS TOWER	125.250	HJ	Primary freq. Coverage FL 40 / 25 NM
		362.300 MHz	HJ	MIL
		122.100	HJ	RGA
		257.800 MHz	HJ	MIL RGA
		121.500	HJ	Emergency
		243.000 MHz	HJ	MIL Emergency
G/A/G	ARAXOS RADIO	5637 KHz	HO:0400 - 1700	Primary freq.
		2989 KHz	HO:1700 - 0400	Primary freq.

All ATS Communication Facilities under responsibility of HAF, except G/A/G service (HASP).

CHANGE : Magn. Var. & Annual Increase,
ATS COMMUNICATION FACILITIES Table.