


**INSTRUMENT  
APPROACH  
CHART - ICAO**


ANAPA RADAR 118.700  
ANAPA TOWER 119.800

**ANAPA, RUSSIA  
VITYAZEVO  
GLS RWY 03**

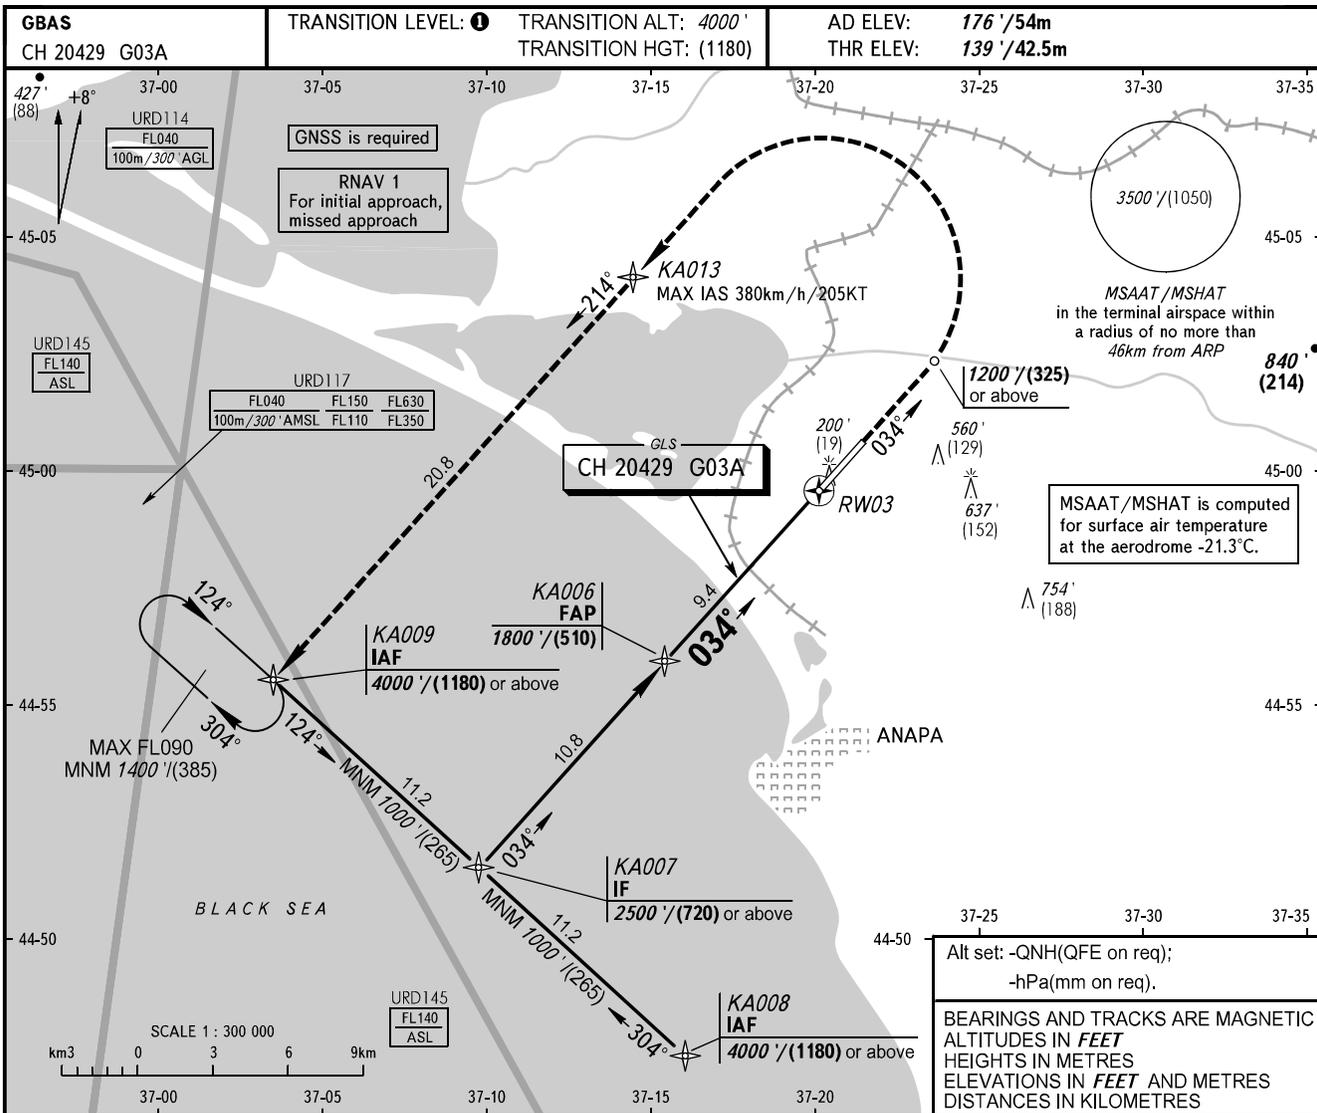

Alt set: -QNH(QFE on req);  
-hPa(mm on req).

BEARINGS AND TRACKS ARE MAGNETIC  
ALTITUDES IN FEET  
HEIGHTS IN METRES  
ELEVATIONS IN FEET AND METRES  
DISTANCES IN KILOMETRES

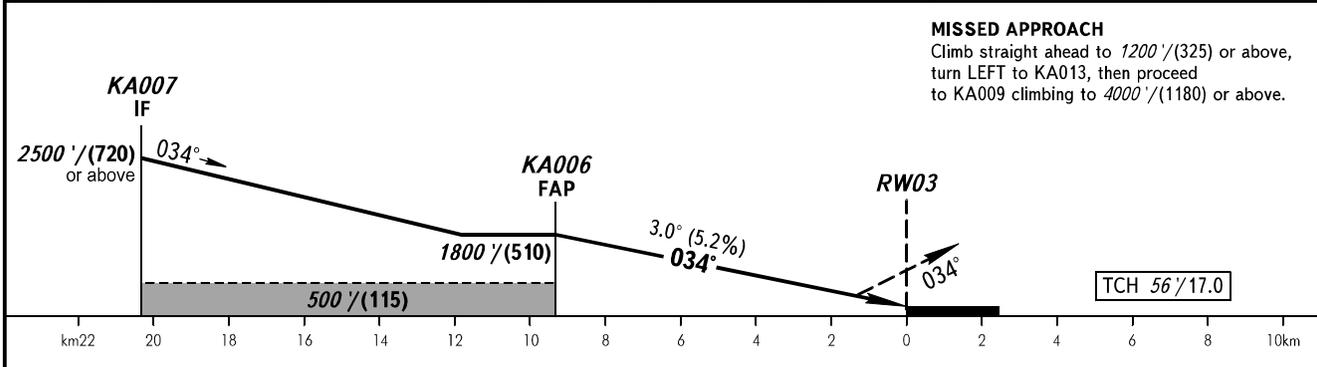

**MISSED APPROACH**  
Climb straight ahead to 1200'/(325) or above,  
turn LEFT to KA013, then proceed  
to KA009 climbing to 4000'/(1180) or above.

OCA(H)		A	B	C	D					
Straight-in	<b>CAT I</b>	282' (143') (44)	291' (152') (47)	302' (163') (50)	315' (176') (54)					
	Approach									
Circling		860' (680') (210)	940' (760') (235)	1040' (860') (265)	1150' (980') (300)					
GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390
	kt	81	97	113	130	146	162	178	194	211
RATE OF DESCENT	m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6
	ft/min	427	512	597	682	768	853	938	1024	1109

**1 TRANSITION LEVEL:**  
- FL050 when QNH is 1013 hPa (760mm mercury column) or above;  
- FL060 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);  
- FL070 when QNH is less than 977 hPa (733mm mercury column).

CHANGE: URD145