

RNAV (GPS) RWY 13L

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)


[USN]

APCH CRS	Rwy Idg	5002
132°	TDZE	18
	Arprt Elev	18

RNP APCH
 ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C (5° F) or above 54° C (129° F).


MISSED APPROACH: Climb to 600, then climbing right turn to 1600 direct POLCK and hold.

ATIS ★ 127.9 290.9	APP CON 128.675 343.75	NAVY CORPUS TOWER ★ 134.85 340.2	GND CON 118.7 257.85	CLNC DEL 314.3	ASR/PAR
-----------------------	---------------------------	-------------------------------------	-------------------------	-------------------	---------

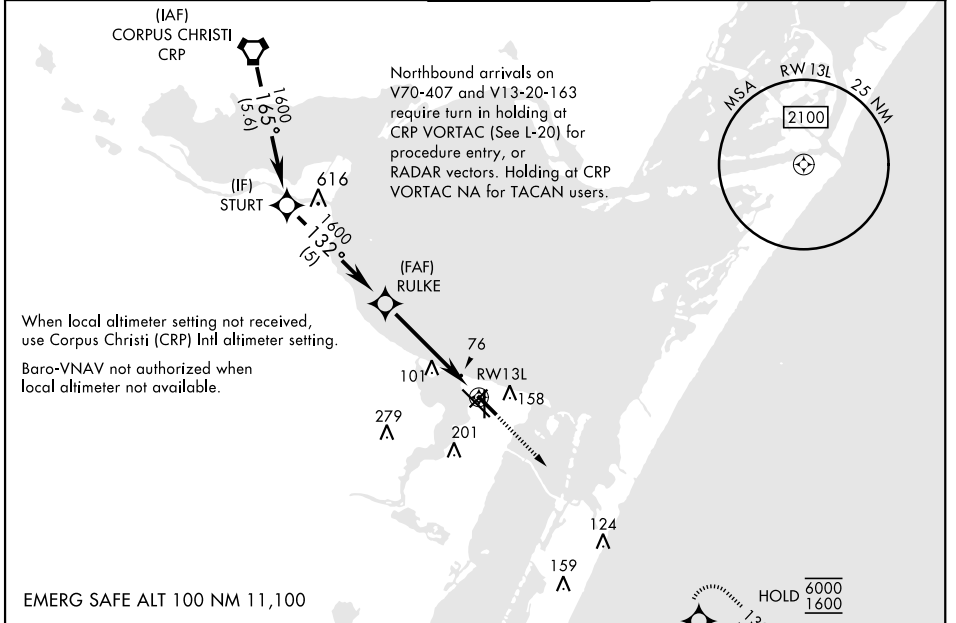


VDP not authorized when using Corpus Christi (CRP) Intl altimeter setting.

600	1600	POLCK

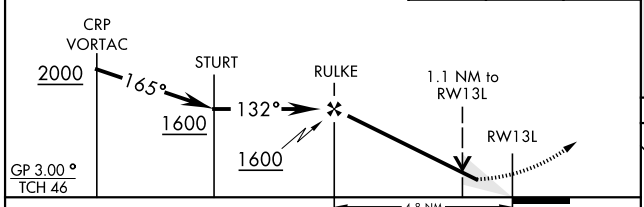

CATEGORY	A	B	C	D
LNAV/VNAV DA	268-1		250 (300-1)	
LNAV MDA	400-1	382 (400-1)	400-1½	382 (400-1½)
CIRCLING	460-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)	580-2 562 (600-2)
CORPUS CHRISTI (CRP) INTL ALTIMETER SETTING				
LNAV MDA	420-1	402 (500-1)	420-1½	402 (500-1½)
CIRCLING	500-1	482 (500-1)	540-1½ 522 (600-1½)	620-2 602 (700-2)



ELEV	18	TDZE	18
------	----	------	----

TWR
 128
 18
 36
 31L 31R
 5002
 5002-184
 961 x
 800 x 200
 500 x 1½

RNAV (GPS) RWY 13L

SC-3, 20 MAR 2025 to 17 APR 2025

SC-3, 20 MAR 2025 to 17 APR 2025