

LOM IA	APP CRS	Rwy ldg	9129
329	280°	TDZE	588
		Apt Elev	592

NDB RWY 28R



NIAGARA FALLS INTL (IAG)

⚠ When local altimeter setting not received, use Buffalo Niagara Intl altimeter setting and increase all MDA 60 feet, increase S-28R Cat C and D visibility 1/4 SM and Circling Cat C and D 1/4 SM. For inop MALSRL, increase S-28R Cats A/B visibility to RVR 5500 and Cats C/D visibility to 1 1/2. For inop MALSRL when using Buffalo Niagara Intl altimeter setting, increase S-28R Cats C/D visibility to 1 1/2. Rwy 28R helicopter visibility reduction below 1/4 SM NA. Circling Rwy 6, 10R, 24, 28L NA at night.


MALSRL

MISSED APPROACH:
 Climbing right turn to 3200 direct KATHI LOM and hold, continue climb-in-hold to 3200.

ATIS	BUFFALO APP CON	NIAGARA TOWER★	GND CON	CLNC DEL	UNICOM
120.8 269.4	126.5 317.6	118.5 (CTAF) 349.0	125.3 275.8	119.25 251.1	122.95

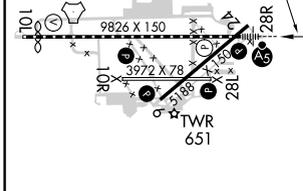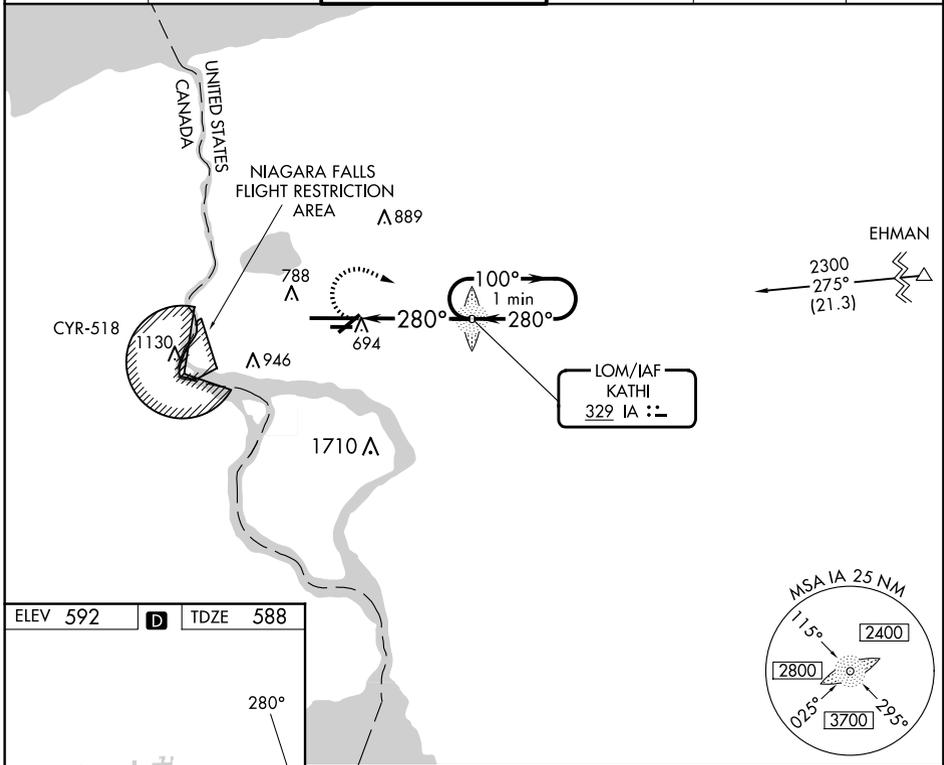

ELEV	592	TDZE	588		
D					
TDZ/CL Rwy 28R	1				
REIL Rws 6, 10R, 24, and 28L	1				
HIRL Rwy 10L-28R	1				
MIRL Rws 6-24 and 10R-28L	1				
FAF to MAP 4.1 NM					
Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22

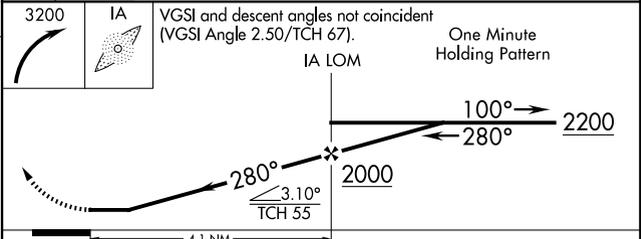

CATEGORY	A	B	C	D
S-28R	1200/40	612 (700-3/4)	1200-1 1/2	612 (700-1 1/2)
C CIRCLING	1200-1	608 (700-1)	1280-2	688 (700-2)
			1280-2 1/4	688 (700-2 1/4)

NE-2, 20 MAR 2025 to 17 APR 2025

NE-2, 20 MAR 2025 to 17 APR 2025