


RECOMMENDED PROFILE - (LNAV 5.2%), 320 ft/NM					
DIST THR	6	5	4	3	2
ALTITUDE	1980	1660	1340	1020	710
HEIGHT	1965	1645	1325	1005	695

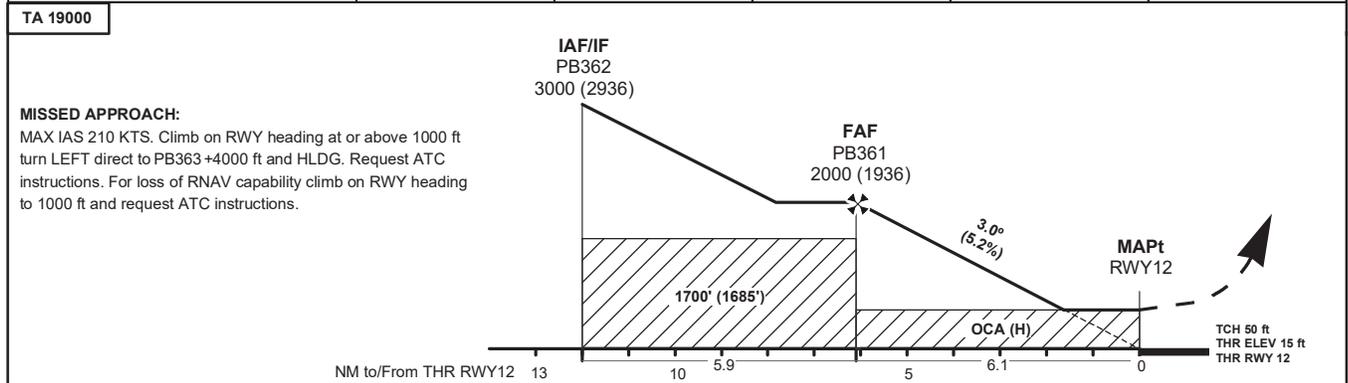

OCA/H	A	B	C	D	Ground Speed						
					KT	70	90	100	120	140	160
LNAV/VNAV	-	-	-	N/A	Rate of Descent FAF-MAPt						
LNAV	470 (455)	470 (455)	470 (455)	N/A	3.0° (5.2%)						
VM (C) OCA	600 (542)	840 (782)	940 (882)	N/A	ft/min	372	478	531	637	743	849

NOTE:
1. No turn before MAPt.
2. Timing not authorized for defining the MAPt.

CHANGES: EDITORIAL CHANGES.