**STANDARD ARRIVAL CHART-INSTRUMENT**

RJSS / SENDAI — RNAV STAR RWY09

| OWLET WEST ARRIVAL | RNP1 |
|---|---|

Note GNSS required.

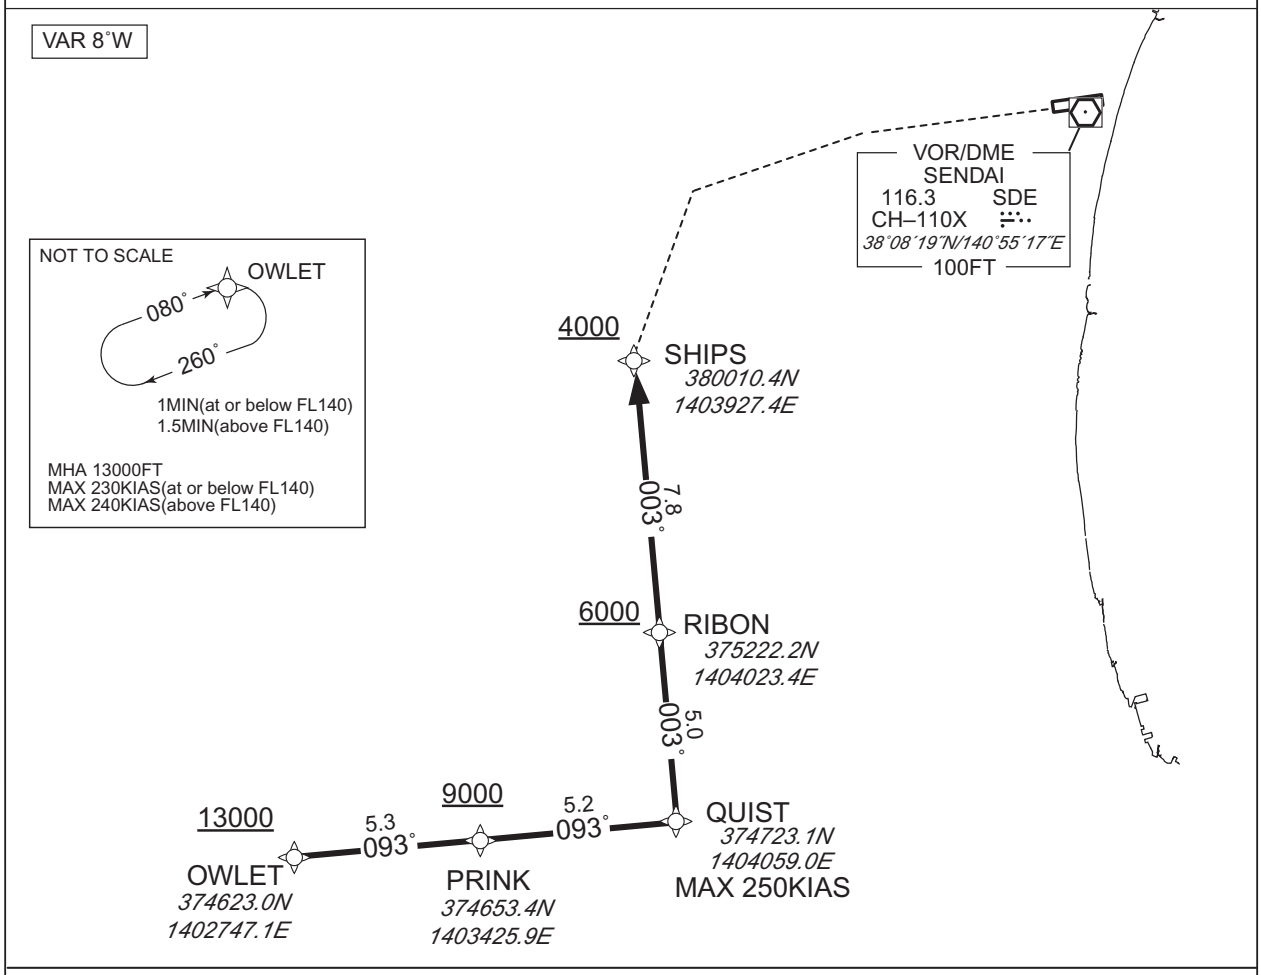


From OWLET at or above 13000FT, to PRINK at or above 9000FT, to QUIST, to RIBON at or above 6000FT, to SHIPS at or above 4000FT.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course ˚M(˚T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 001 | IF | OWLET | — | — | -8.3 | — | — | +13000 | — | — | RNP1 |
| 002 | TF | PRINK | — | 093 (084.4) | -8.3 | 5.3 | — | +9000 | — | — | RNP1 |
| 003 | TF | QUIST | — | 093 (084.5) | -8.3 | 5.2 | — | — | -250 | — | RNP1 |
| 004 | TF | RIBON | — | 003 (354.6) | -8.3 | 5.0 | — | +6000 | — | — | RNP1 |
| 005 | TF | SHIPS | — | 003 (354.6) | -8.3 | 7.8 | — | +4000 | — | — | RNP1 |

| Path | Waypoint Identifier | Inbound Course ˚M(˚T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|---|---|---|---|---|---|---|---|---|---|
| Hold | OWLET | 080 (071.7) | -8.3 | 1.0(-14000)<br>1.5(+14001) | R | 13000 | — | -230(-14000)<br>-240(+14001) | RNP1 |

CHANGE : Navigation Specification(Basic RNP1 → RNP1).