

INSTRUMENT APPROACH CHART

RODN / KADENA

VORTAC KAD 112.0 Chan 57	APCH CRS 050°	Rwy Idg 12,101 TDZE 106 Arpt Elev 143
--	-------------------------	--


VOR or TACAN RWY05R

DME required ▼ *Circling NW of Rwy 05L-23R not authorized.	MISSED APPROACH: Climb to 6000 on KAD VORTAC R-055 to IMONO and hold.
--	---


ATIS ★ 124.2 280.5	NAHA APP CON 119.1 335.8 (NW) 126.5 258.3 (SE)	TOWER 134.1 315.8	GND CON 118.5 275.8	CLNC DEL 123.3 235.0	ASR
------------------------------	--	-----------------------------	-------------------------------	--------------------------------	-----

Knots	60	120	180	240	300	360
V/V(fpm)	260	520	780	1040	1300	1560


ATC climb of 260 ft/NM to 6000

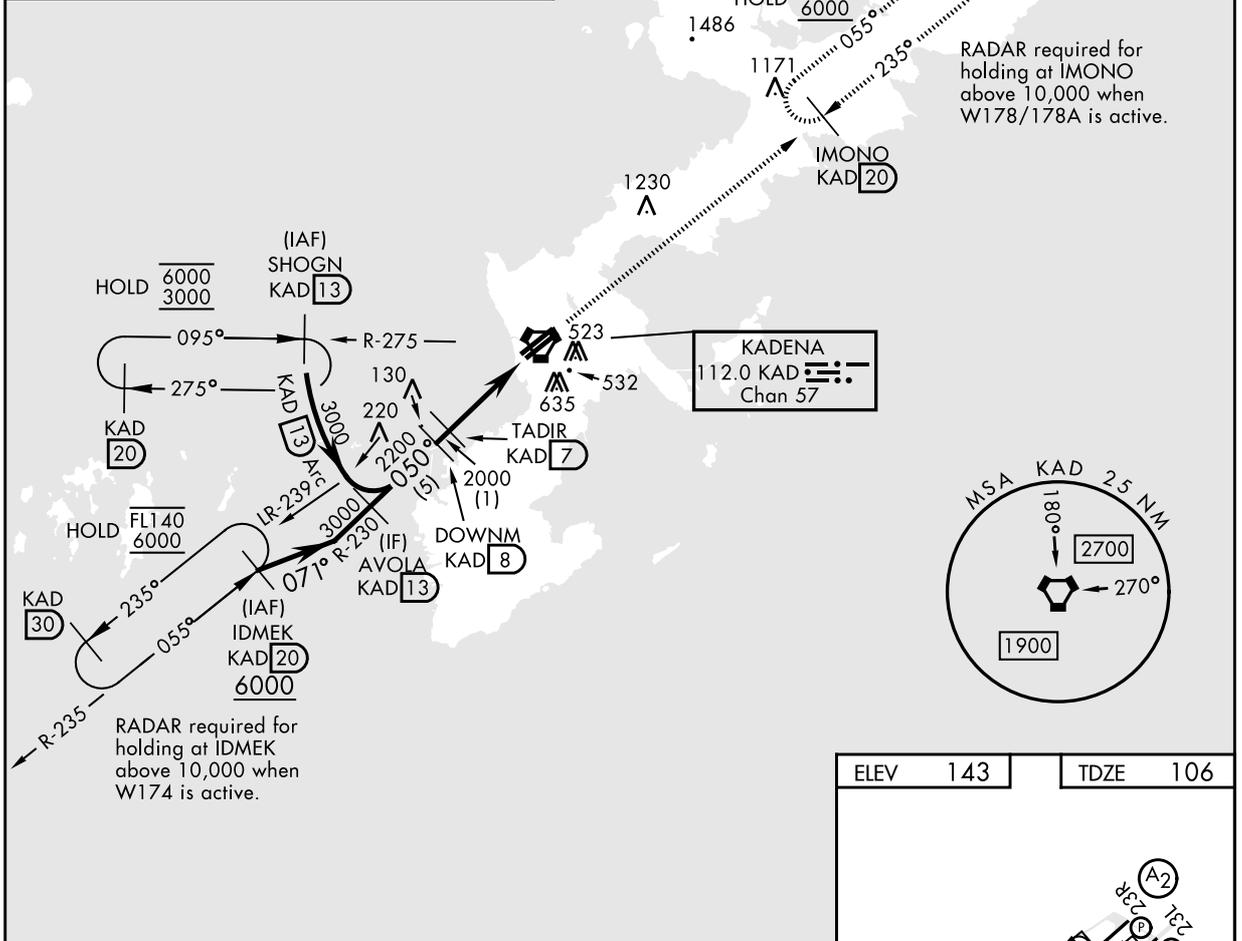

EMERGENCY SAFE ALT 100 NM 2700

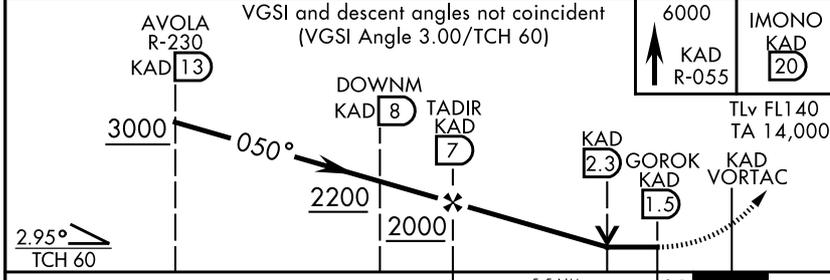

ELEV	143	TDZE	106
------	-----	------	-----

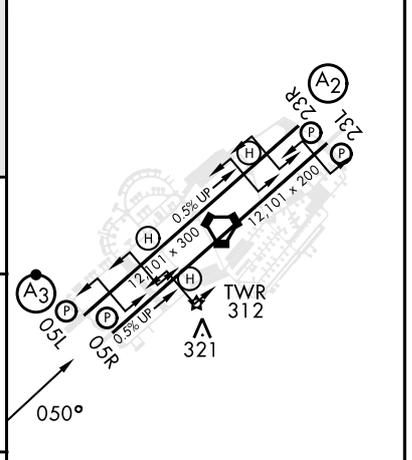

CHANGE : Update.

CATEGORY	A	B	C	D	E
S-05R	520/55	414 (400-1)	520/60	414	(400-1½)
☑ CIRCLING*	780-1 637 (700-1)	920-1 777 (800-1)	940-2¼ 797 (800-2¼)	940-2½ 797 (800-2½)	1160-3 1017 (1100-3)

HIRL all rwys
REIL Rwy 05R and 23L

NOTE: REPRINTING DOD FLIP