AIRCRAFT PARKING DOCKING CHART - ICAO

Bearings are magnetic	TWR 125.900 122.100
Distances in metres	
Elevation in ft AMSL	ATIS 119.930
Coordinates WGS84	

APRON	
lighting	bearing strength
Edge: Blue	PCN 58/F/B/W/T mq 169000 ASPH

TWYs and Apron TWYs	Aircraft compatibility
TWY L	MAX WING SPAN 52 m
APRON TWY U	MAX WING SPAN 29 m
APRON TWY W	MAX WING SPAN 24 m
APRON TWY T from G to K	MAX WING SPAN 64 m
APRON TWY T from K to L	MAX WING SPAN 52 m

RMK: TWY H not available for taxiing to/from stands 101-111 and 1-3

VAR +4° E (2020)

Annual rate of change 6'E

metres 0 50 100 150 200
feet 0 150 300 450 600

AD ELEV 46	LAMEZIA TERME	
APRON ELEV 33	L I C A	38°54'30" N 016°14'30" E

POINTS ON PARKING AREA					
STANDS	N	E	STANDS	N	E
101	38° 54' 35.2"	016° 14' 19.1"	6	38° 54' 31.9"	016° 14' 40.7"
102	38° 54' 34.4"	016° 14' 22.0"	7	38° 54' 31.6"	016° 14' 43.5"
103	38° 54' 34.9"	016° 14' 19.4"	8	38° 54' 31.3"	016° 14' 46.4"
104	38° 54' 34.9"	016° 14' 20.3"	9	38° 54' 31.0"	016° 14' 49.3"
105	38° 54' 34.8"	016° 14' 21.1"	10	38° 54' 30.5"	016° 14' 52.1"
106	38° 54' 34.6"	016° 14' 23.0"	11	38° 54' 30.3"	016° 14' 54.1"
107	38° 54' 34.5"	016° 14' 23.8"	12	38° 54' 30.2"	016° 14' 54.5"
108	38° 54' 34.4"	016° 14' 24.6"	13	38° 54' 30.0"	016° 14' 57.3"
109	38° 54' 34.2"	016° 14' 26.4"	14	38° 54' 29.6"	016° 14' 59.8"
110	38° 54' 34.1"	016° 14' 27.3"	15	38° 54' 29.2"	016° 15' 02.1"
111	38° 54' 34.0"	016° 14' 28.1"	16	38° 54' 28.9"	016° 15' 03.7"
1	38° 54' 33.4"	016° 14' 30.0"	17	38° 54' 28.6"	016° 15' 05.4"
2	38° 54' 32.8"	016° 14' 30.8"	18	38° 54' 28.5"	016° 15' 06.9"
3	38° 54' 33.2"	016° 14' 31.4"	19	38° 54' 27.0"	016° 15' 10.0"
4	38° 54' 32.3"	016° 14' 35.3"	20	38° 54' 28.3"	016° 15' 10.2"
5	38° 54' 32.2"	016° 14' 37.9"	21	38° 54' 29.6"	016° 15' 10.4"

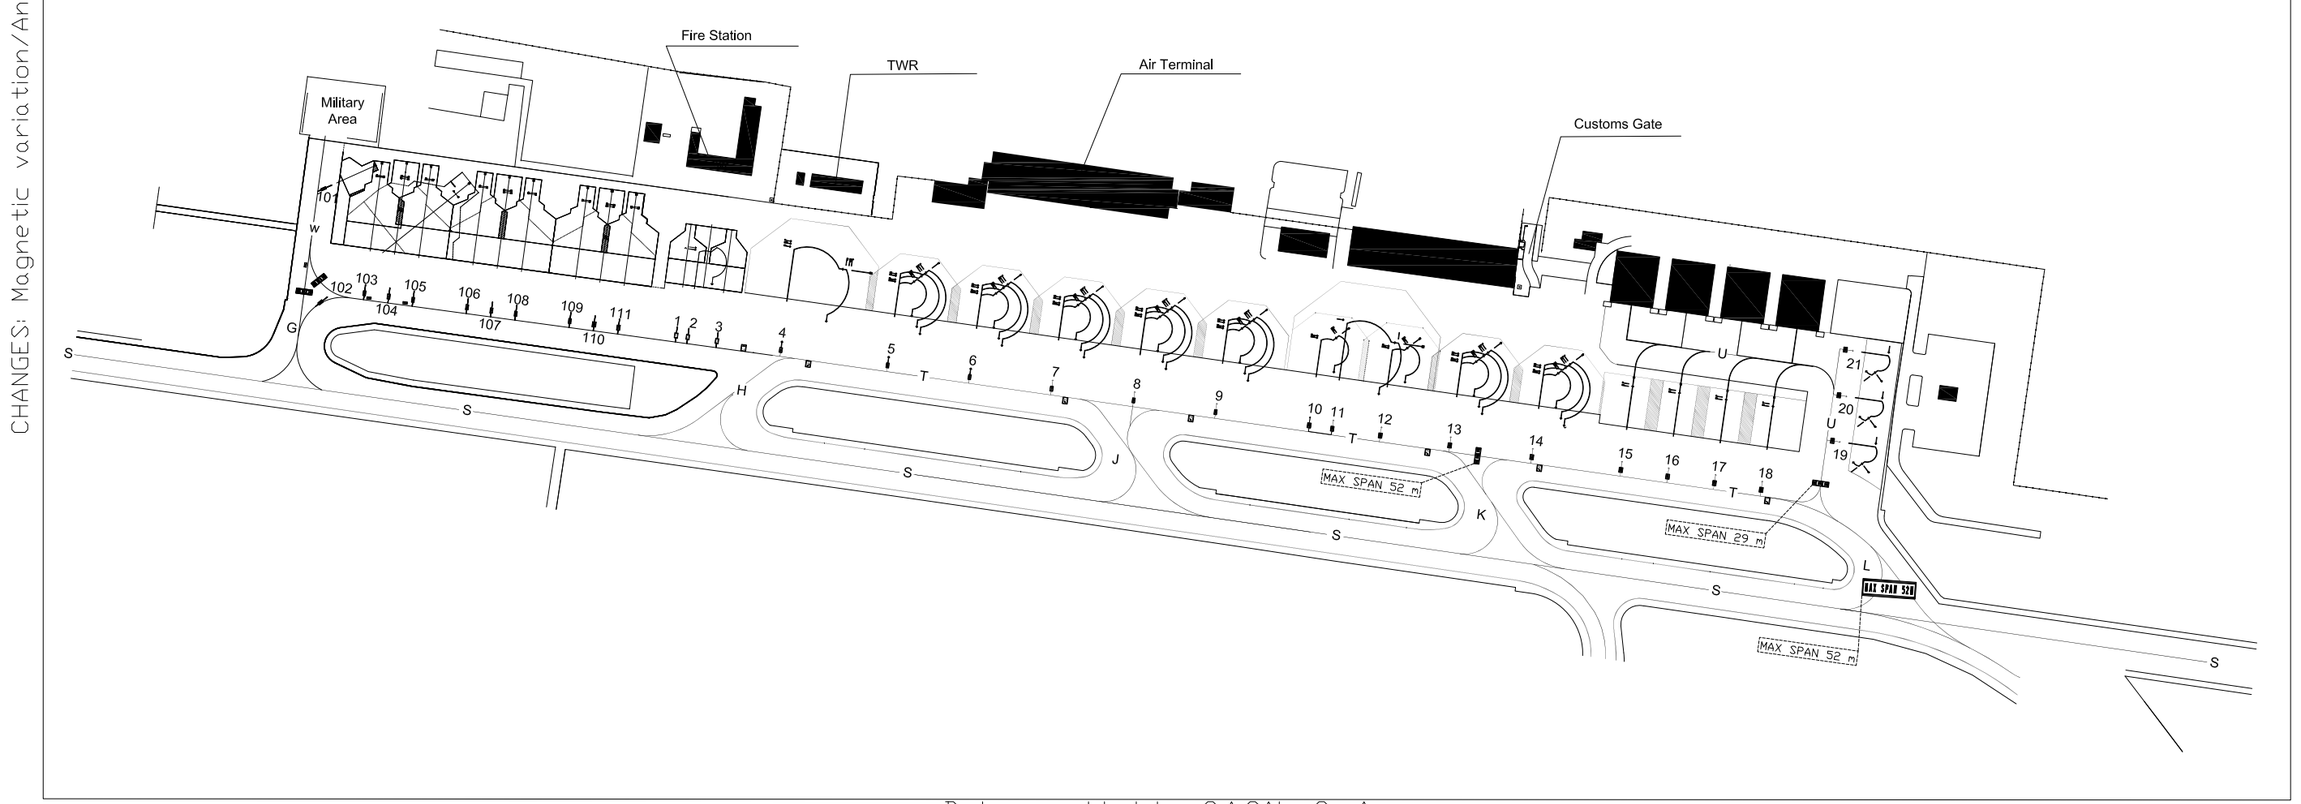

Data provided by S.A.CAL. S.p.A.