

VORTAC SQS	APP CRS	Rwy Idg	5011
114.7	076°	TDZE	149
Chan 94		Apt Elev	162


VOR RWY 5

GREENWOOD-LEFLORE (GWO)

When local altimeter setting not received, use Greenville altimeter setting and increase all MDAs 120 feet and visibility S-5 Cat B and Circling Cat A/B ¼ SM, and S-5 Cat C/D and Circling Cat C ½ SM and COTMU Fix Minimums S-5 Cat C/D ¼ SM and Circling Cat C ½ SM. Rwy 5 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 5 NA at night, Circling Rwy 5, 23 NA at night.



MISSED APPROACH:
Climbing right turn to 2500 direct SQS VORTAC and hold.

ASOS	MEMPHIS CENTER	GREENWOOD TOWER *	GND CON	CLNC DEL	UNICOM
119.975	132.5 259.1	118.35 (CTAF) 367.6	125.55 373.4	125.55	122.95

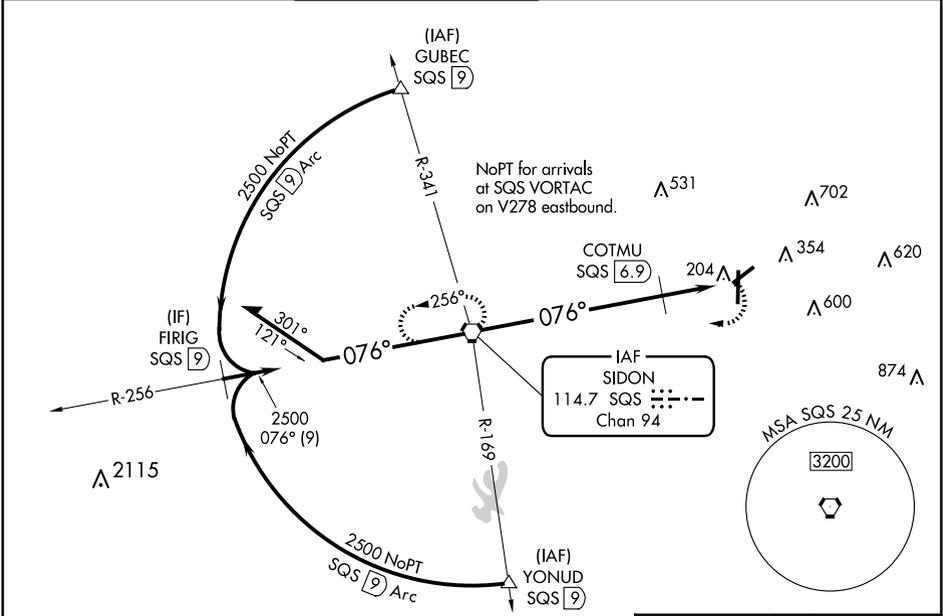

SC-4, 20 MAR 2025 to 17 APR 2025

SC-4, 20 MAR 2025 to 17 APR 2025

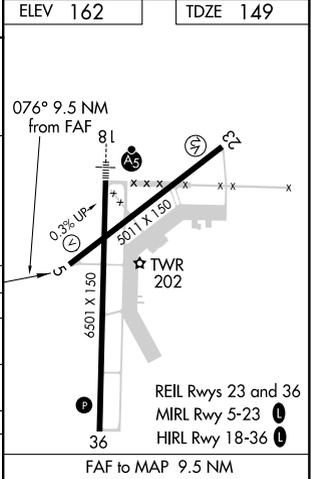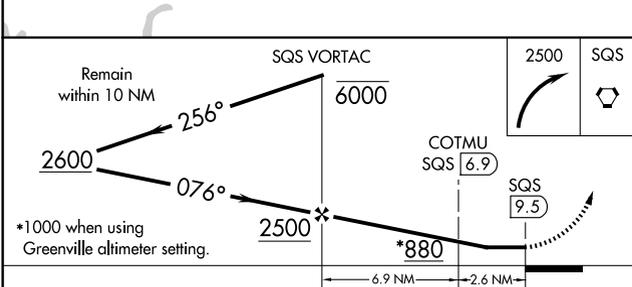

CATEGORY	A	B	C	D
S-5	880-1	731 (800-1)	880-2	731 (800-2)
C CIRCLING	880-1	718 (800-1)	1000-2½ 838 (900-2½)	1120-3 958 (1000-3)
COTMU FIX MINIMUMS (DME REQUIRED)				
S-5	600-1	451 (500-1)	600-1¾	451 (500-1¾)
C CIRCLING	760-1	598 (600-1)	1000-2½ 838 (900-2½)	1120-3 958 (1000-3)

FAF to MAP 9.5 NM	Knots	60	90	120	150	180
	Min:Sec	9:30	6:20	4:45	3:48	3:10