


INSTRUMENT
APPROACH
CHART - ICAO

SIVKAR RADAR 124.600

SYKTYVKAR, RUSSIA
SYKTYVKAR
NDB RWY 18

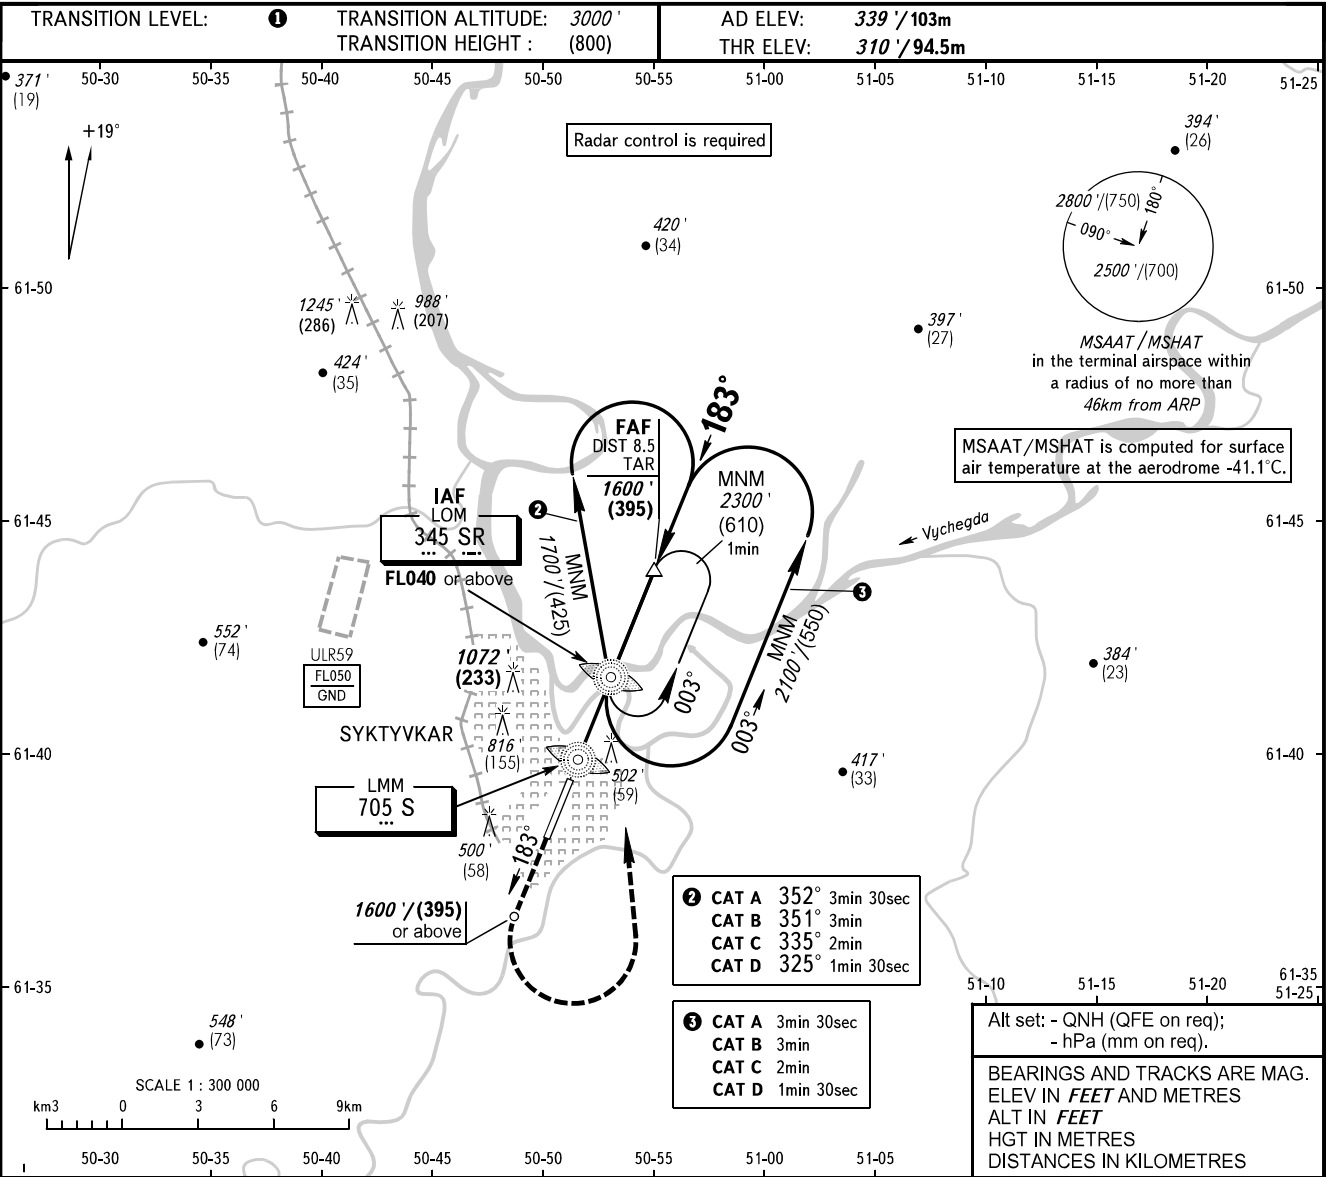

MISSED APPROACH
Climb on track 183° to 1600' / (395) or above, then turn LEFT to LOM SR climbing to 2100' / (550) or above, then according to chart.

WARNING:
1. Turn before MAPt is PROHIBITED.
2. MAPt at LMM S. Timing not authorized for defining MAPt.
3. TAR reads zero at ARP.

OCA(H)		A	B	C	D	① TRANSITION LEVEL:				
Straight-in Approach		840' (530') (165)	840' (530') (165)	840' (530') (165)	840' (530') (165)	- FL040 when QNH is 1013 hPa (760mm mercury column) or above;				
						- FL050 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);				
Circling		790' (450') (140)	840' (510') (155)	940' (600') (185)	1030' (700') (215)	- FL060 when QNH is less than 977 hPa (733mm mercury column).				
GROUND SPEED	km/h	150	180	210	240	270	300	330	360	② WARNING Visual manoeuvring west of the aerodrome is PROHIBITED.
	kt	81	97	113	130	146	162	178	194	
RATE OF DESCENT	m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	CHANGE: MNM
	ft/min	427	512	597	682	768	853	938	1024	