



INSTRUMENT APPROACH CHART

RJSK / AKITA

RNP Y RWY10(AR)

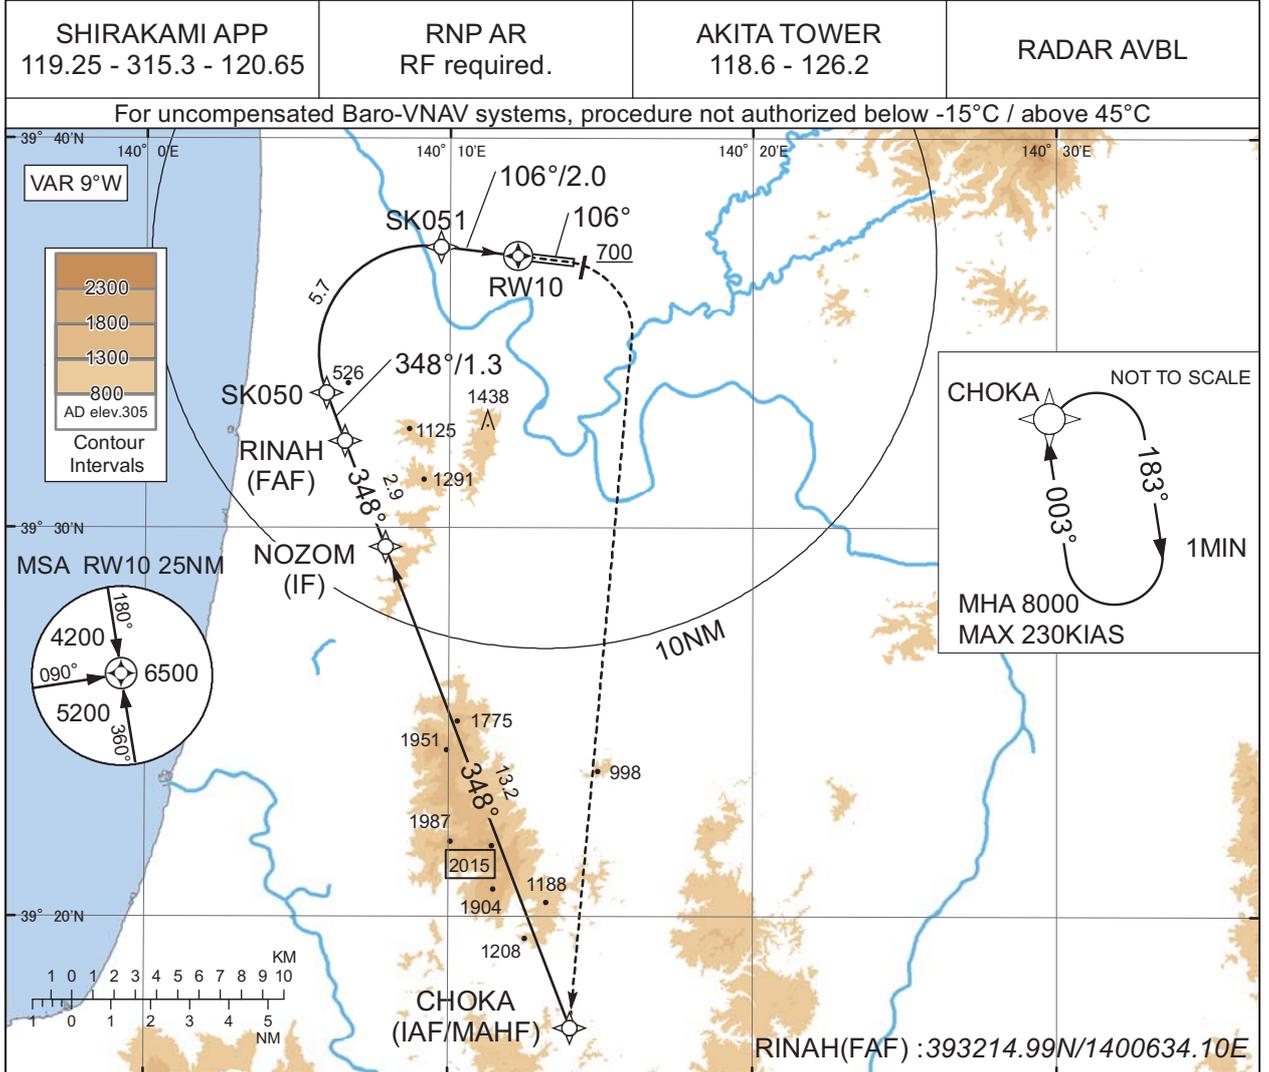

CHANGE : HLDG pattern for using NAVAID abolished.

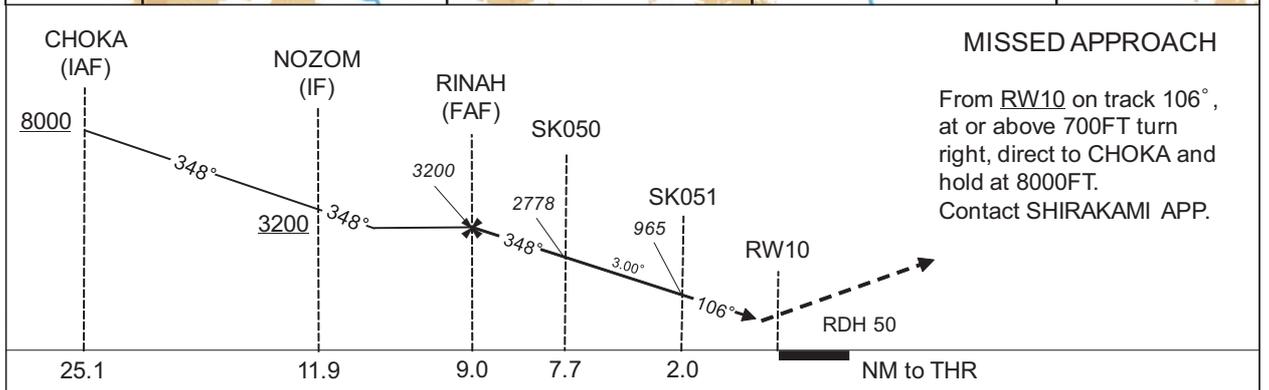

Missed APCH climb gradient MNM 5.0%

MINIMA	THR elev. 289	AD elev. 305
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B	-	-
C	686(397)	1400
D	686(397)	1600

Authorization Required

MINIMA with Missed APCH climb gradient of 2.5% are not established.

## INSTRUMENT APPROACH CHART

RJSK / AKITA

RNP Y RWY10(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	CHOKA	-	-	-9.0	-	-	+8000	-	-	-
002	TF	NOZOM	-	348 (339.2)	-9.0	13.2	-	+3200	-	-	1.0
003	TF	RINAH	-	348 (339.1)	-9.0	2.9	-	3200	-	-	1.0
004	TF	SK050	-	348 (339.1)	-9.0	1.3	-	2778	-	-3.00	0.3
005	RF Center: SKRF1 r=2.78NM	SK051	-	-	-9.0	5.7	R	965	-	-3.00	0.3
006	TF	RW10	Y	106 (096.6)	-9.0	2.0	-	339	-	-3.00/50	0.3
007	FA	-	-	106 (096.6)	-9.0	-	-	+700	-	-	1.0
008	DF	CHOKA	-	-	-9.0	-	R	8000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	CHOKA	003 (353.8)	-9.0	1.0 (-14000)	R	8000	FL140	-230 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
CHOKA	391709.51N / 1401401.06E	SKRF1	393428.91N / 1400918.43E
NOZOM	392931.83N / 1400754.90E		
RINAH	393214.99N / 1400634.10E		
SK050	393329.21N / 1400557.30E		
SK051	393714.55N / 1400943.07E		
RW10	393700.98N / 1401215.14E		