STANDARD DEPARTURE CHART -INSTRUMENT

RJGG / CHUBU CENTRAIR

RNAV SID

MEIJYO THREE DEPARTURE

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.
2) RADAR service required.

Critical DME	RWY18 KCC : 3.8NM to DEGNA – DEGNA RWY36 KCC : 3.0NM from DER – PONTE
DME GAP	RWY18 : DER – 2.0NM from DER RWY36 : DER – 3.0NM from DER 3.0NM to KCC – KCC
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

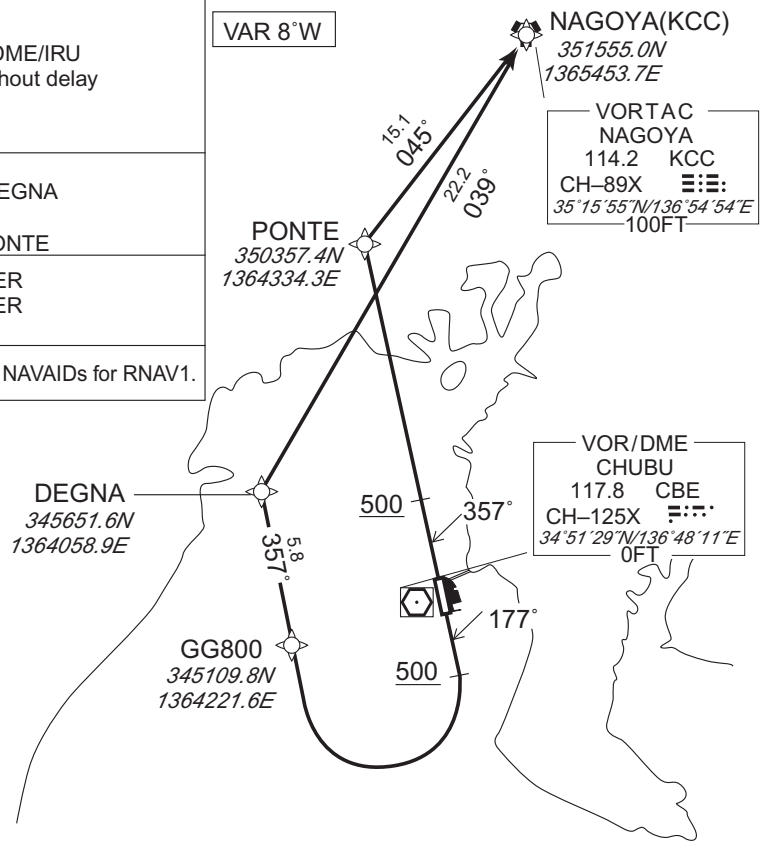

RWY18 : Climb on HDG177˚ at or above 500FT, turn right direct to GG800, to DEGNA, to KCC.
RWY36 : Climb on HDG357˚ at or above 500FT, direct to PONTE, to KCC.

CHANGE : Description of VAR and PROC name.

RWY18

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course ˚M(˚T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	177 (169.0)	-7.8	—	—	+500	—	—	RNAV1
002	DF	GG800	—	—	-7.8	—	R	—	—	—	RNAV1
003	TF	DEGNA	—	357 (348.8)	-7.8	5.8	—	—	—	—	RNAV1
004	TF	KCC	—	039 (030.8)	-7.8	22.2	—	—	—	—	RNAV1

RWY36

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course ˚M(˚T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	357 (349.0)	-7.8	—	—	+500	—	—	RNAV1
002	DF	PONTE	—	—	-7.8	—	—	—	—	—	RNAV1
003	TF	KCC	—	045 (037.7)	-7.8	15.1	—	—	—	—	RNAV1

STANDARD DEPARTURE CHART -INSTRUMENT

RJGG / CHUBU CENTRAIR — RNAV TRANSITION

UOZU TRANSITION / MOCHI TRANSITION	RNAV 1

Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	UOZU TRANSITION : YME : KCC – KROBE MOCHI TRANSITION : YME : KCC – GOHEI
	DME GAP	–
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

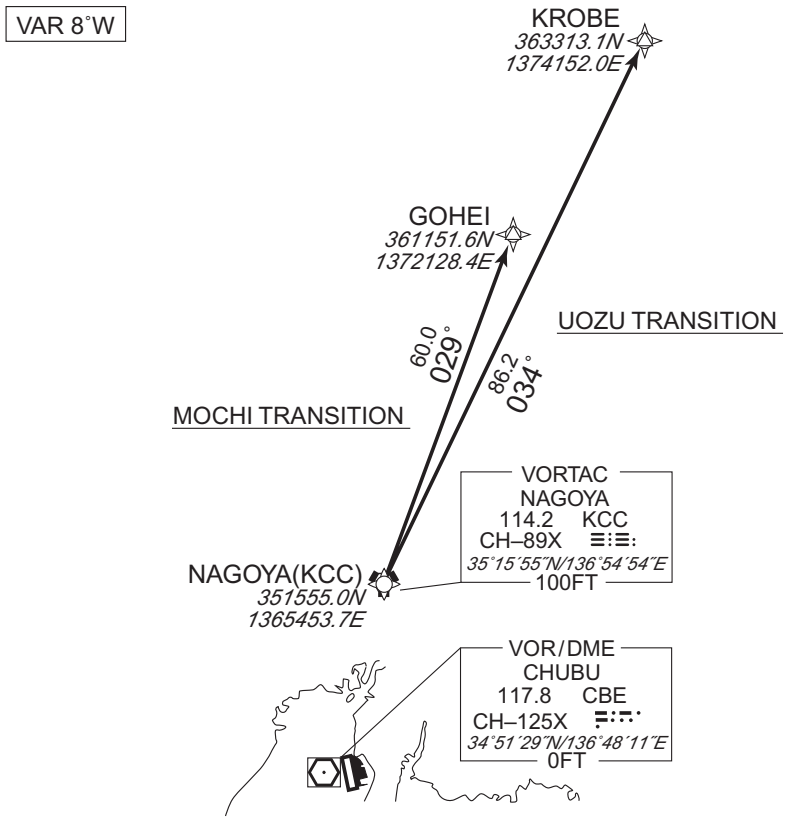

UOZU TRANSITION
From KCC, to KROBE.

MOCHI TRANSITION
From KCC, to GOHEI.

UOZU TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course ˚M(˚T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KCC	—	—	-7.8	—	—	—	—	—	RNAV1
002	TF	KROBE	—	034 (026.0)	-7.8	86.2	—	—	—	—	RNAV1

MOCHI TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course ˚M(˚T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KCC	—	—	-7.8	—	—	—	—	—	RNAV1
002	TF	GOHEI	—	029 (021.0)	-7.8	60.0	—	—	—	—	RNAV1

CHANGE : Description of VAR.