

| | | |
|---|------------------------|--|
| VORTAC DSD 117.6 Chan 123 | APP CRS 071° | Rwy Idg TDZE Apt Elev N/A N/A 3080 |
|---|------------------------|--|

VOR-A


ROBERTS FLD (RDM)

When local altimeter setting not received, use Bend altimeter setting and increase all MDA 80 feet and visibility Cats C and D ¼ mile.

☔ -17°C


MISSED APPROACH: Climb to 4100 then climbing right turn to 7900 on heading 220° and on DSD VORTAC R-143 to DSD VORTAC and hold.

| | | | | |
|------------------------|---|---|-------------------------|-------------------------|
| ATIS 119.025 | SEATTLE CENTER 126.15 269.475 | REDMOND TOWER* 124.5 (CTAF) 0 256.8 | GND CON 121.8 | UNICOM 122.95 |
|------------------------|---|---|-------------------------|-------------------------|


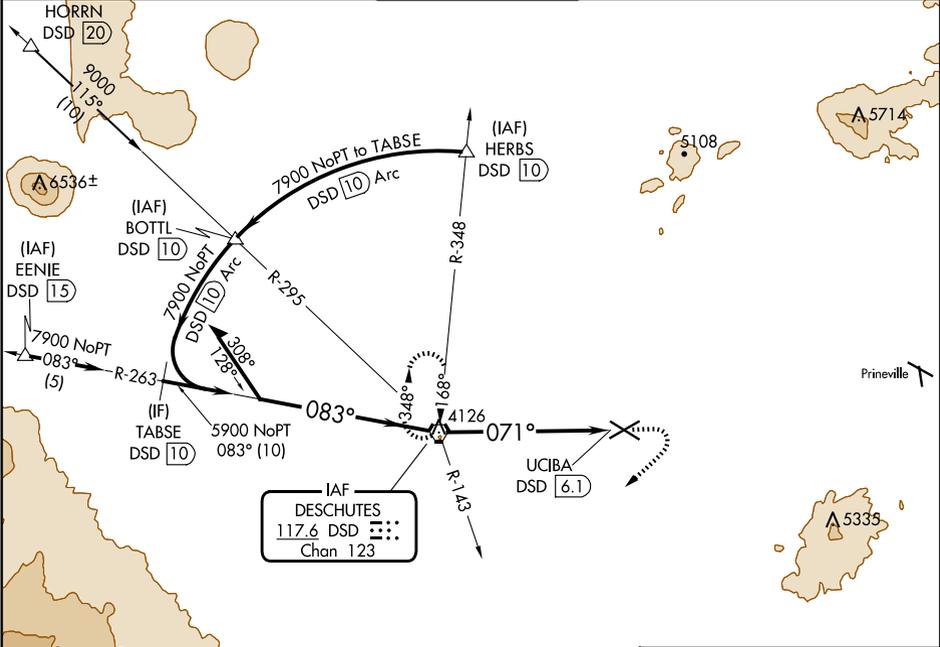


NW-1, 20 MAR 2025 to 17 APR 2025

NW-1, 20 MAR 2025 to 17 APR 2025

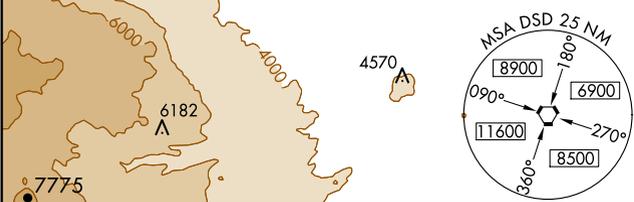

ELEV 3080 **D**

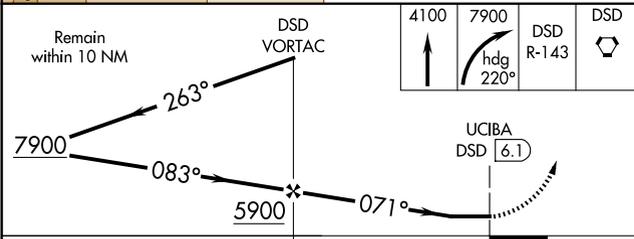

REIL Rwys 5, 11, and 29
HIRL Rwy 5-23
MIRL Rwy 11-29

| | | | | | | | | | | |
|-------------------|--------|-------------|-------------------------|-------------------------|-------------------|------|------|------|------|------|
| CATEGORY | A | B | C | D | FAF to MAP 6.1 NM | | | | | |
| C CIRCLING | 3660-1 | 580 (600-1) | 3660-1½ 580 (600-1½) | 3760-2¼ 680 (700-2¼) | Knots | 60 | 90 | 120 | 150 | 180 |
| | | | | | Min:Sec | 6:06 | 4:04 | 3:03 | 2:26 | 2:02 |