

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA



RNAV STAR RWY16L/16R

KIRIN E ARRIVAL


RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8° W

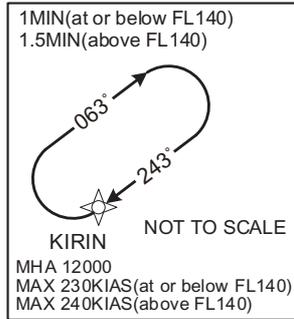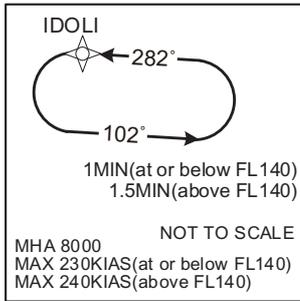

CHANGE : PROC renamed.

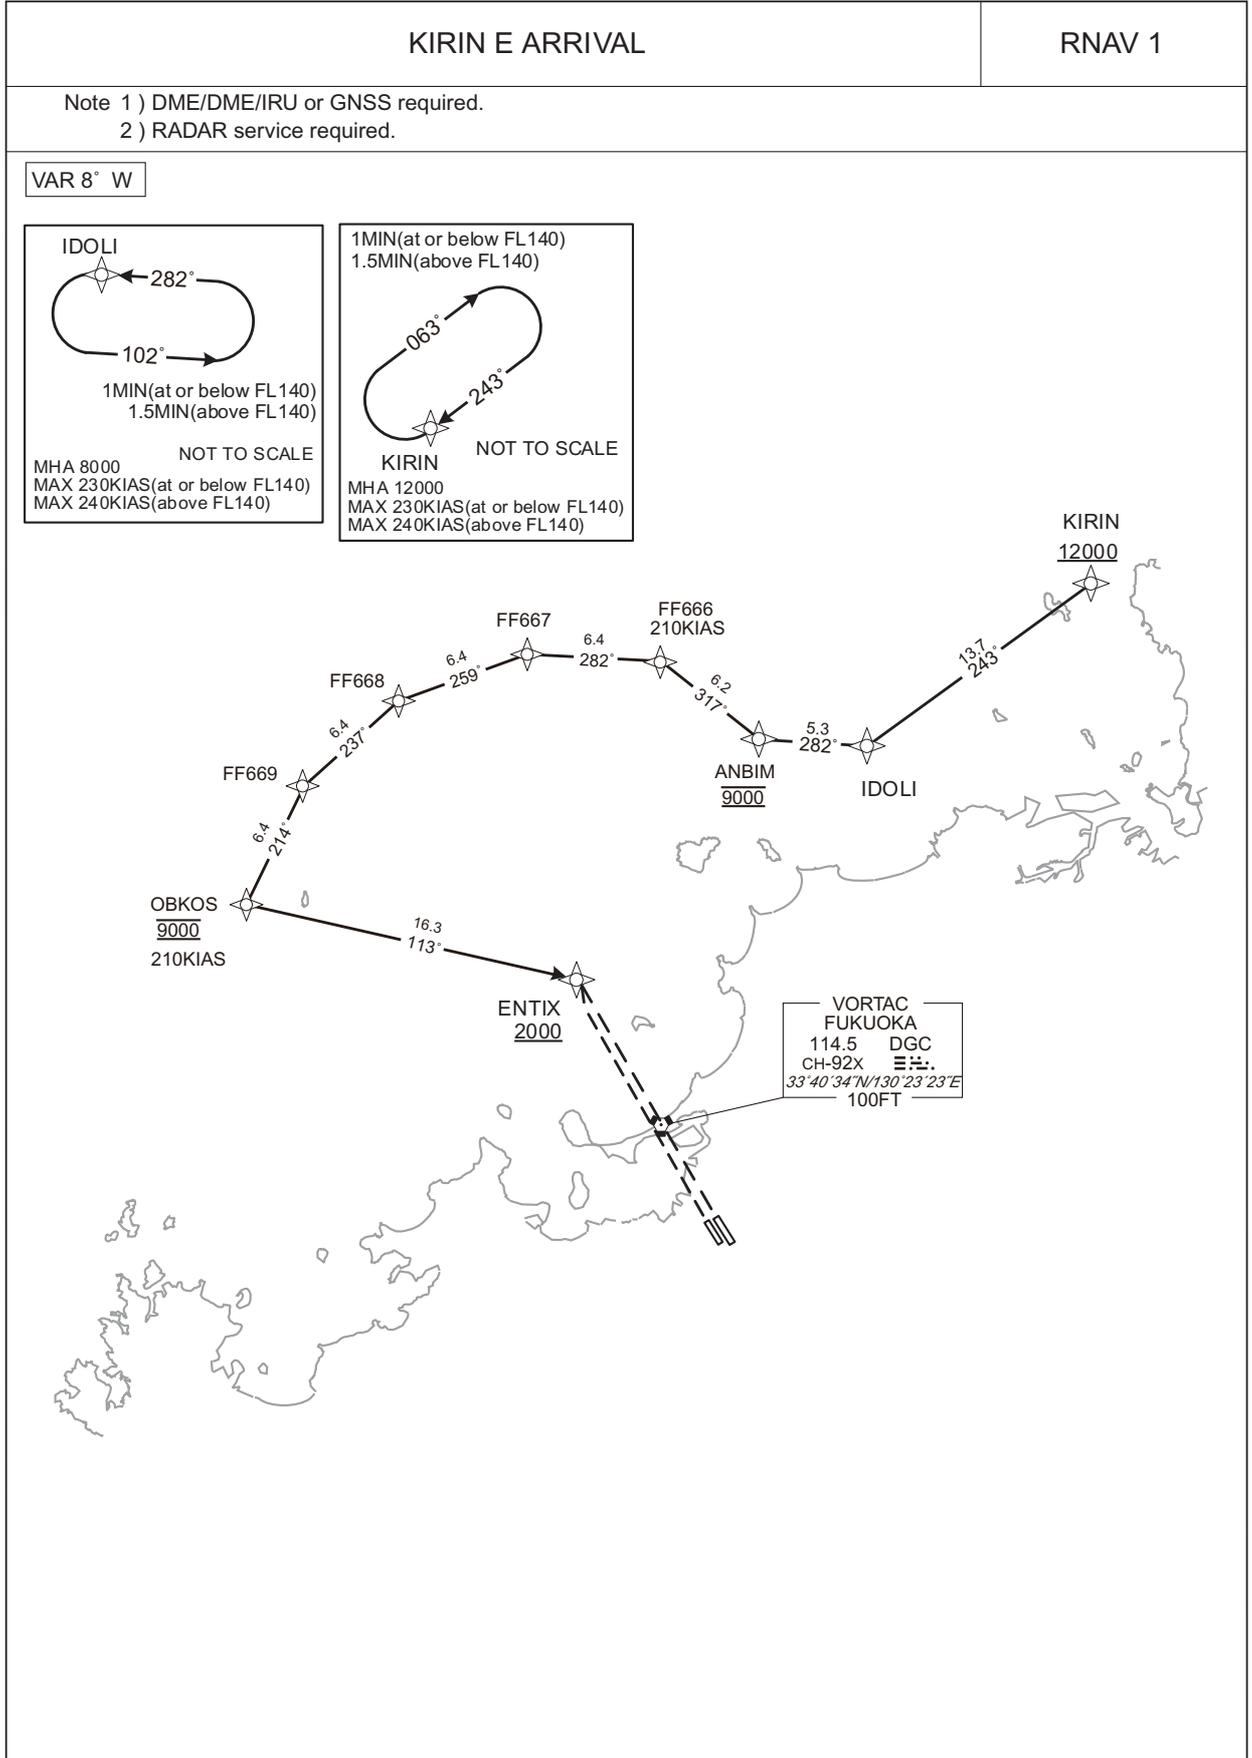

STANDARD ARRIVAL CHART-INSTRUMENT

RJFF / FUKUOKA

RNAV STAR RWY16L/16R

KIRIN E ARRIVAL

From KIRIN at or above 12000FT, to IDOLI, to ANBIM at 9000FT, to FF666, to FF667, to FF668, to FF669, to OBKOS at 9000FT, to ENTIX at or above 2000FT.

Critical DME	-
DME GAP	-
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIRIN	-	-	-8.0	-	-	+12000	-	-	RNAV1
002	TF	IDOLI	-	243 (235.0)	-8.0	13.7	-	-	-	-	RNAV1
003	TF	ANBIM	-	282 (274.2)	-8.0	5.3	-	9000	-	-	RNAV1
004	TF	FF666	-	317 (308.8)	-8.0	6.2	-	-	210	-	RNAV1
005	TF	FF667	-	282 (274.1)	-8.0	6.4	-	-	-	-	RNAV1
006	TF	FF668	-	259 (251.4)	-8.0	6.4	-	-	-	-	RNAV1
007	TF	FF669	-	237 (228.8)	-8.0	6.4	-	-	-	-	RNAV1
008	TF	OBKOS	-	214 (206.3)	-8.0	6.4	-	9000	210	-	RNAV1
009	TF	ENTIX	-	113 (105.2)	-8.0	16.3	-	+2000	-	-	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	KIRIN	243 (235.1)	-8.0	1.0(-14000) 1.5(+14001)	R	12000	-	-230(-14000) -240(+14001)	RNAV1
Hold	IDOLI	282 (274.3)	-8.0	1.0(-14000) 1.5(+14001)	L	8000	-	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates
KIRIN	340717.9N / 1304919.3E
IDOLI	335926.2N / 1303546.7E
ANBIM	335949.6N / 1302922.5E
FF666	340344.2N / 1302330.1E
FF667	340411.4N / 1301551.1E
FF668	340209.8N / 1300834.7E
FF669	335758.2N / 1300248.0E
OBKOS	335215.0N / 1295923.7E
ENTIX	334757.5N / 1301818.9E

CHANGE : PROC renamed.