

ATC SURVEILLANCE MINIMUM  
ALTITUDE CHART - ICAO

AD ELEV 193  
TRANSITION ALT 5000

BRINDISI  
RADAR 126.875

BARI/Palese (LIBD)


BEARINGS  
ARE MAGNETIC  
VAR 4°E (2020)

CHART ONLY TO BE USED FOR  
CROSS-CHECKING OF ALTITUDES/LEVELS  
ASSIGNED BY BRINDISI RADAR

ALTITUDES AND  
ELEVATIONS  
ARE IN FEET

IN CASE OF COM FAILURE  
SET TRANSPONDER  
CODE 7600

CHANGE: CHART SCALE REVISED; SECTORS: 4500, FL100, 2500 MODIFIED; BRINDISI CTA COMPLETELY MODIFIED

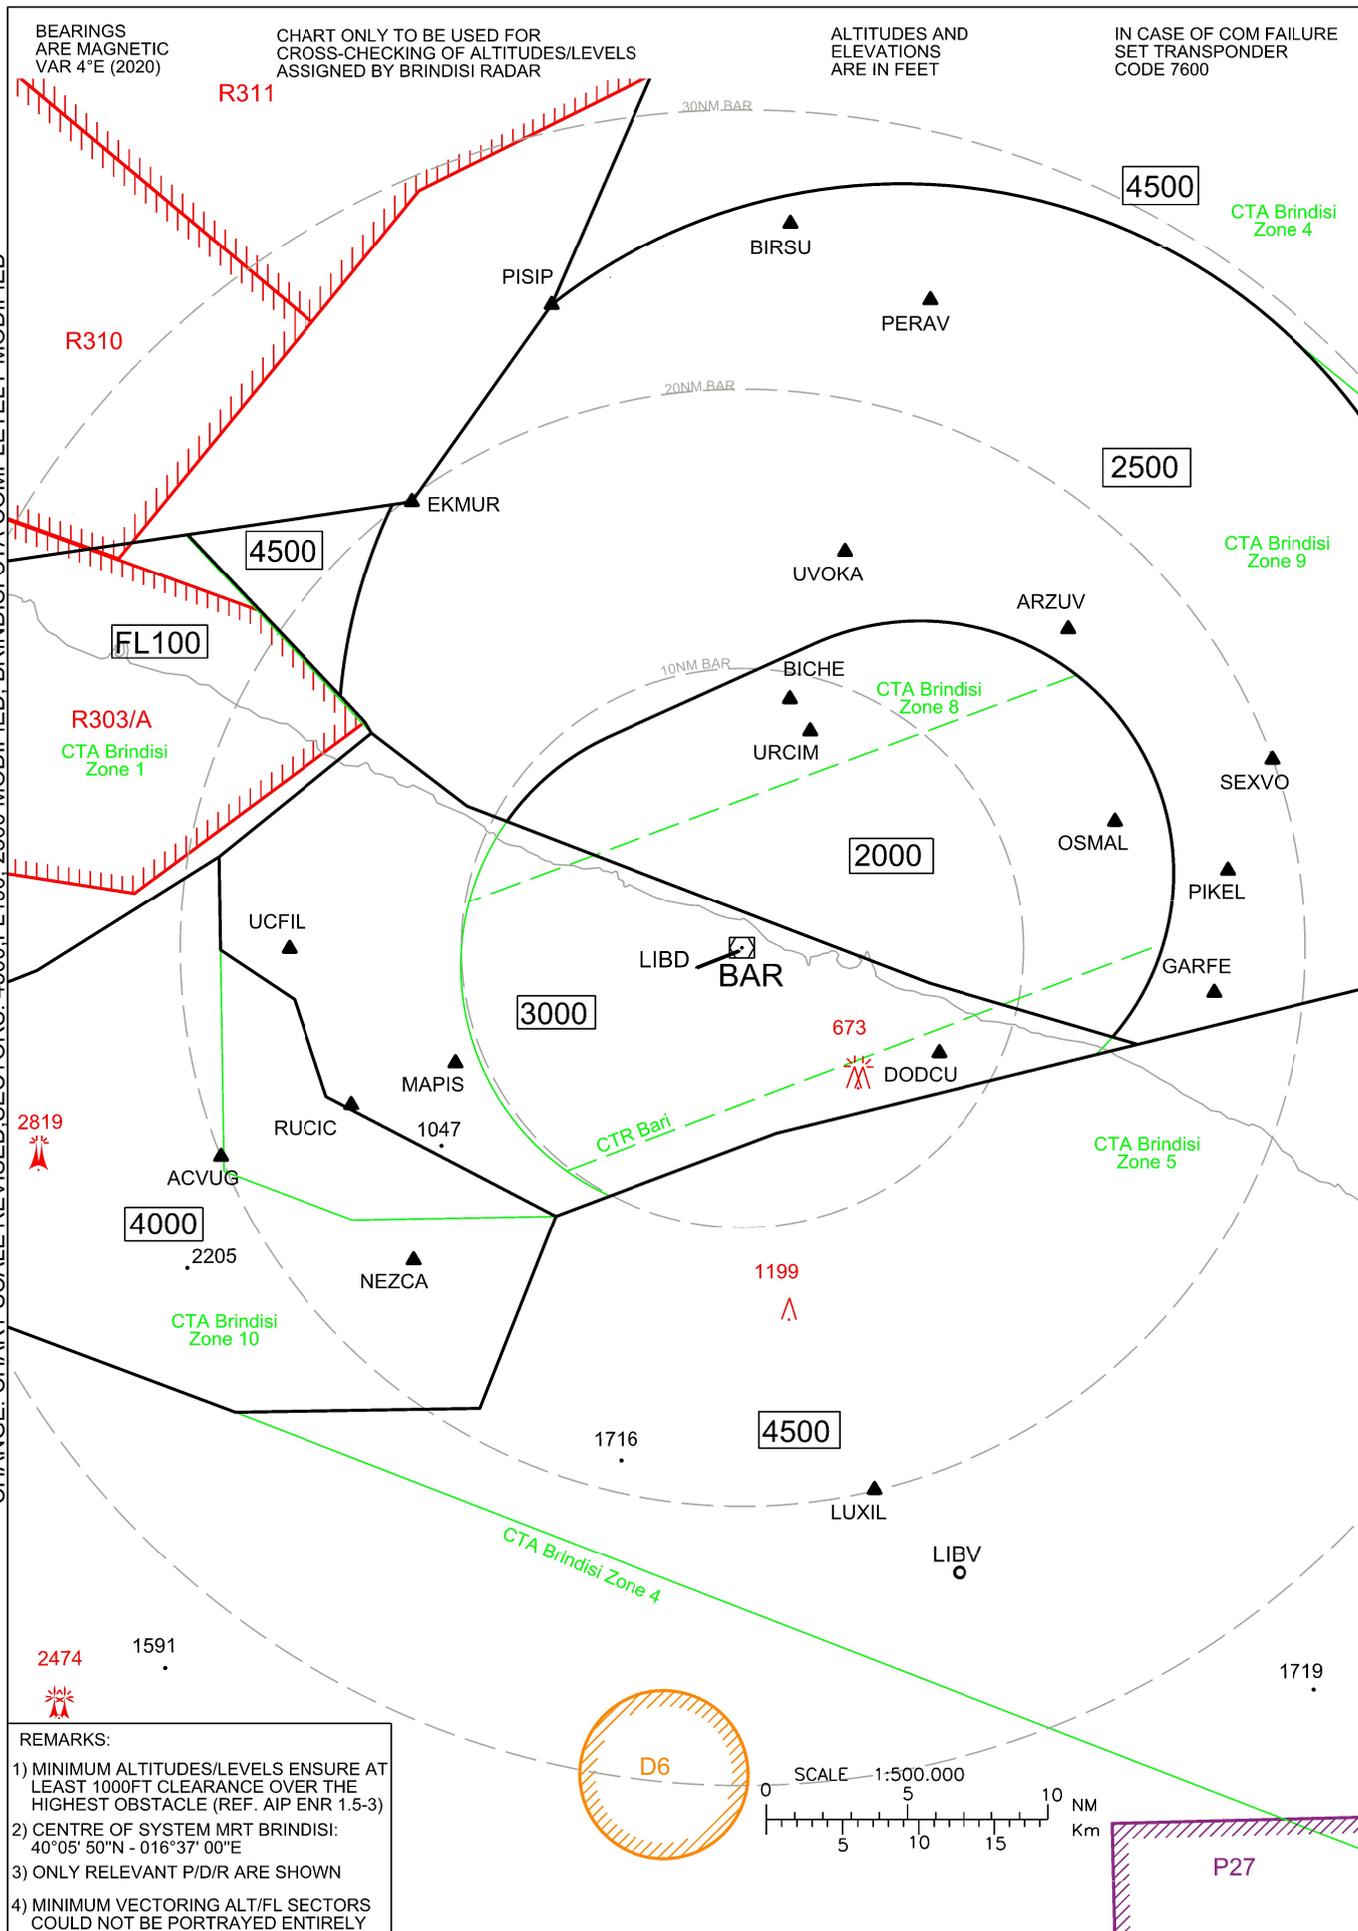

REMARKS:

- 1) MINIMUM ALTITUDES/LEVELS ENSURE AT LEAST 1000FT CLEARANCE OVER THE HIGHEST OBSTACLE (REF. AIP ENR 1.5-3)
- 2) CENTRE OF SYSTEM MRT BRINDISI: 40°05' 50"N - 016°37' 00"E
- 3) ONLY RELEVANT P/D/R ARE SHOWN
- 4) MINIMUM VECTORING ALT/FL SECTORS COULD NOT BE PORTRAYED ENTIRELY