INSTRUMENT APPROACH CHART

RJCK / KUSHIRO

ILS Z or LOC Z RWY17 (CATⅢ)

HIDAKA APP	ILS-LOC	KUSHIRO TOWER	RADAR AVBL
128.325 - 246.1 - 134.55	108.9 IKS ILS–GP 329.3 ILS–DME CH-26X	118.05 – 126.2	

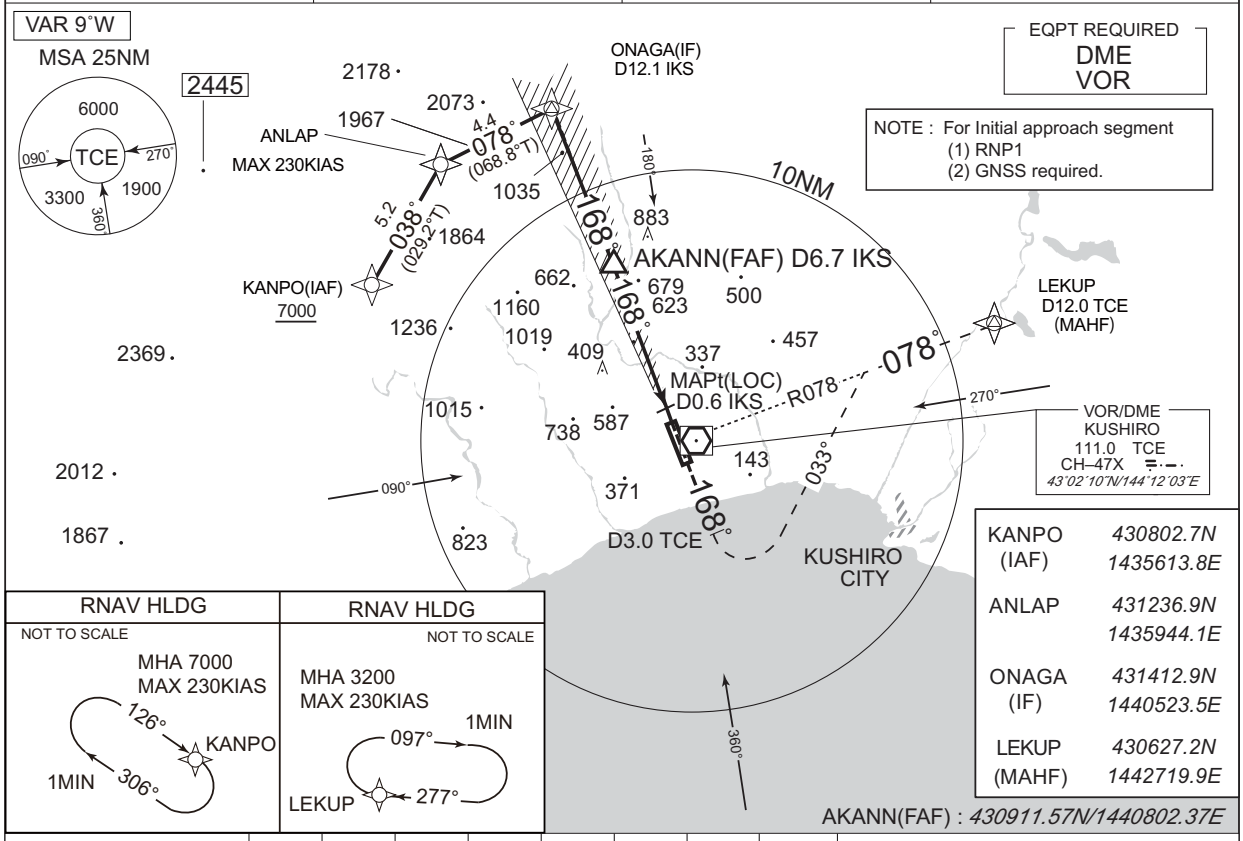

NM to IKS	FAF	6	5	4	3	2	1	MAPt
ALT (3.0˚ APCH Path)	2455	2223	1905	1587	1268	949	631	–

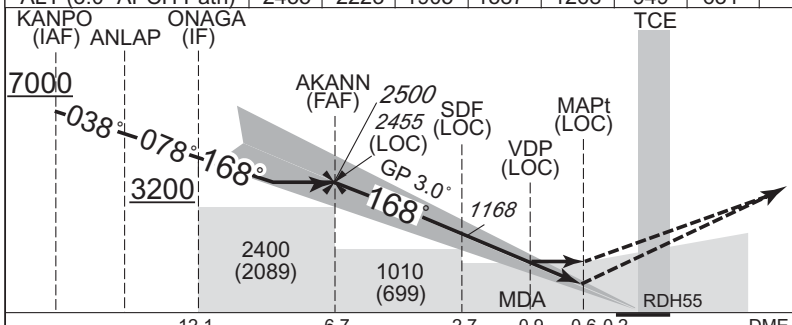

MISSED APPROACH

Climb on HDG 168˚ to TCE 3.0DME, turn left HDG033° to intercept and proceed via TCE R078 to LEKUP and hold at 3200FT.
Contact HIDAKA APP.

Timing not authorized for defining the MAPt.

DME to IKS	12.1	6.7	2.7	0.9	0.6	0.2		
NM to THR	11.9	6.5	2.5	0.7	0.5	0		

MINIMA THR elev. 323 AD elev. 311

CAT	CAT Ⅲ	CAT Ⅱ			CAT Ⅰ		LOC		CIRCLING	
	RVR	DA(H)	RA	RVR	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	100	Not applicable.			523 (200)	550	590 (279)	800	730 (419)	1600
B									770 (459)	
C										2400
D								1200	870 (559)	3200

Circling to EAST side of RWY only.
Values of RA may increase or decrease rapidly affected by terrain between IKS 0.4DME and 0.8DME.

CHANGE : Description of latitude and longitude.