

# STANDARD DEPARTURE CHART - INSTRUMENT

VAR 7.5° W


D-ATIS(Chinese) 127.225  
 D-ATIS(English) 128.4  
 TWR01 118.825(124.35)  
 TWR04 118.725(130.3)

**ZBAD BEIJING/Daxing**  
 RNAV RWY35L/35R(IDKEX/DOTRA)

BEARINGS ARE MAGNETIC.  
 ALTITUDES, ELEVATIONS  
 AND HEIGHTS IN METERS.  
 DME DISTANCES IN  
 NAUTICAL MILES.  
 DISTANCES IN KM.

TL 3600  
 TA 3000  
 3300(QNH ≥ 1031hPa)  
 2700(QNH ≤ 979hPa)

APP06 119.925(119.625) APP14 126.3(119.425)  
 APP07 120.0(119.625) APP15 125.8(119.425)  
 APP12 119.85(119.425) APP16 124.4(127.75)  
 APP13 121.25(119.425) APP17 120.6(127.75)

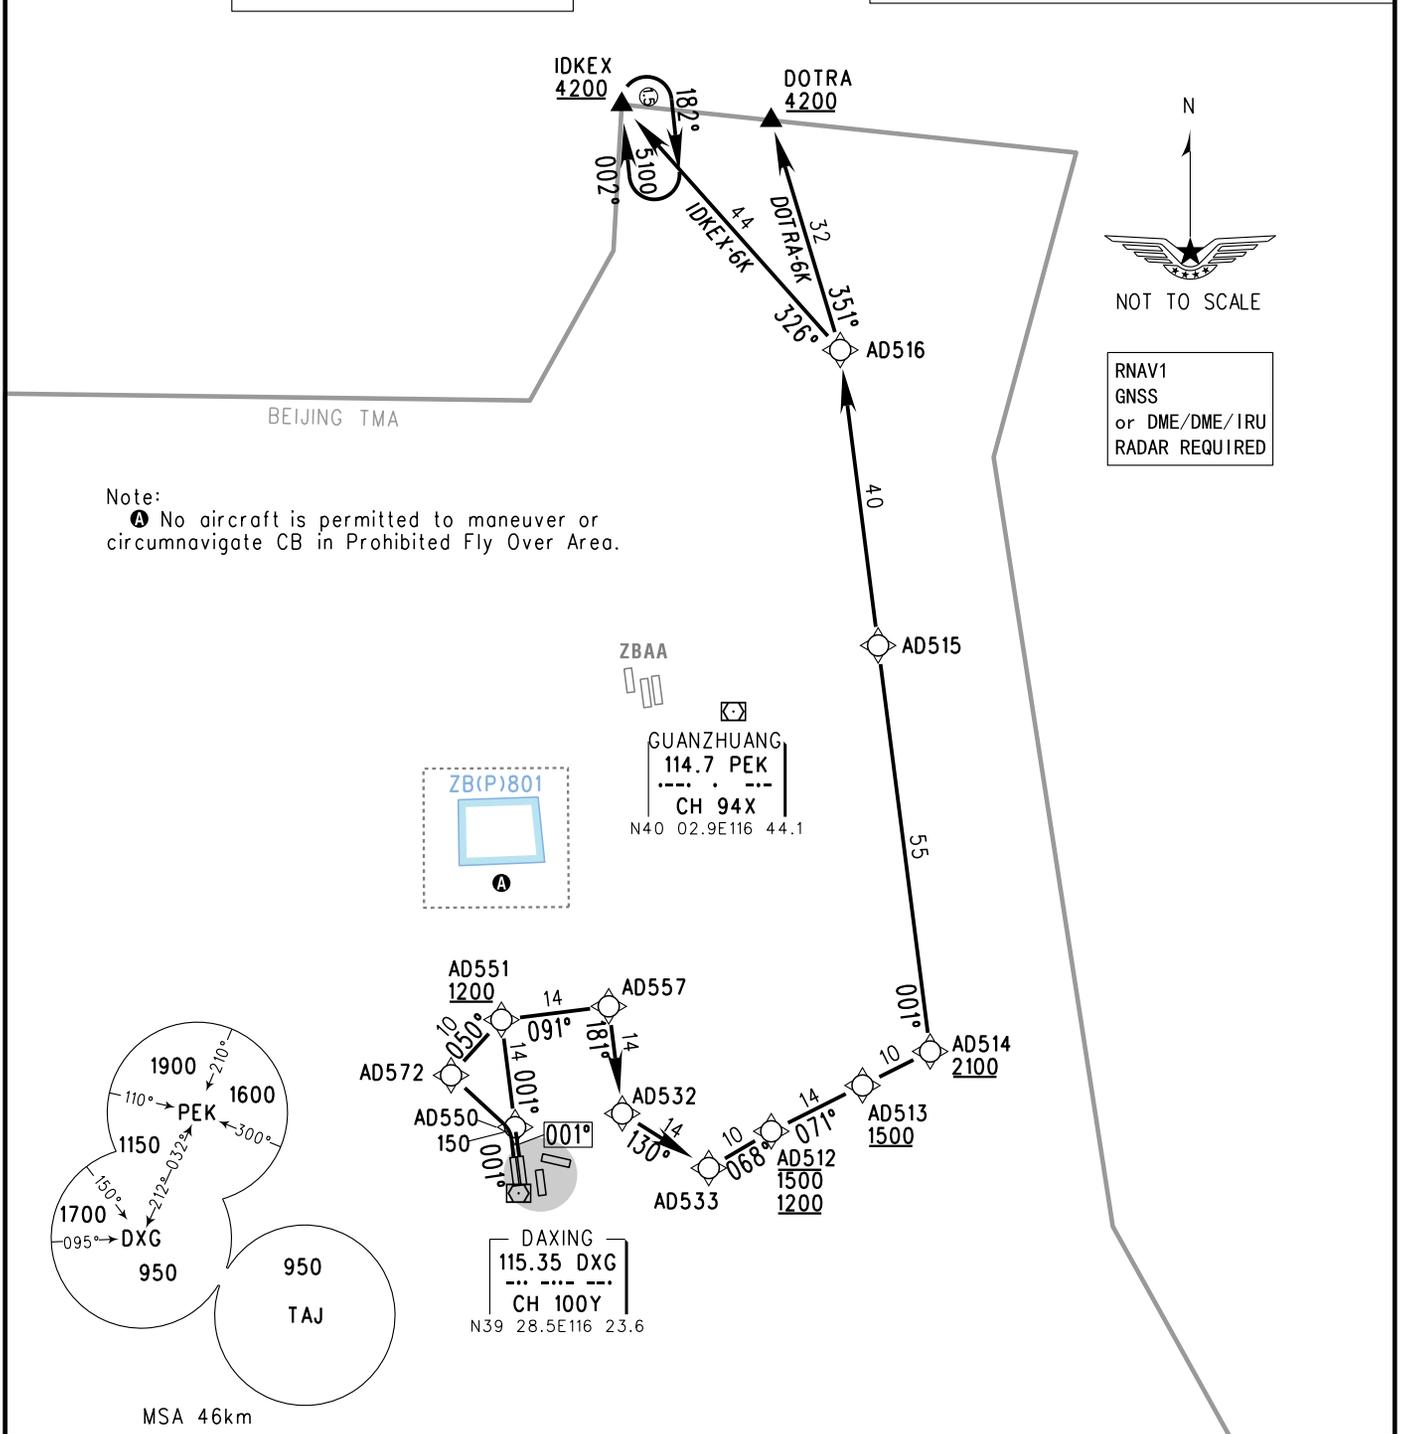

RNAV1  
 GNSS  
 or DME/DME/IRU  
 RADAR REQUIRED

RWY	SID	ROUTING
35L	IDKEX-6K	by ATC 150-AD572-AD551-AD557-AD532-AD533-AD512 -AD513-AD514-AD515-AD516-IDKEX
35R		by ATC AD550-AD551-AD557-AD532-AD533-AD512
35L	DOTRA-6K	by ATC 150-AD572-AD551-AD557-AD532-AD533-AD512 -AD513-AD514-AD515-AD516-DOTRA
35R		by ATC AD550-AD551-AD557-AD532-AD533-AD512

Changes: New chart.