


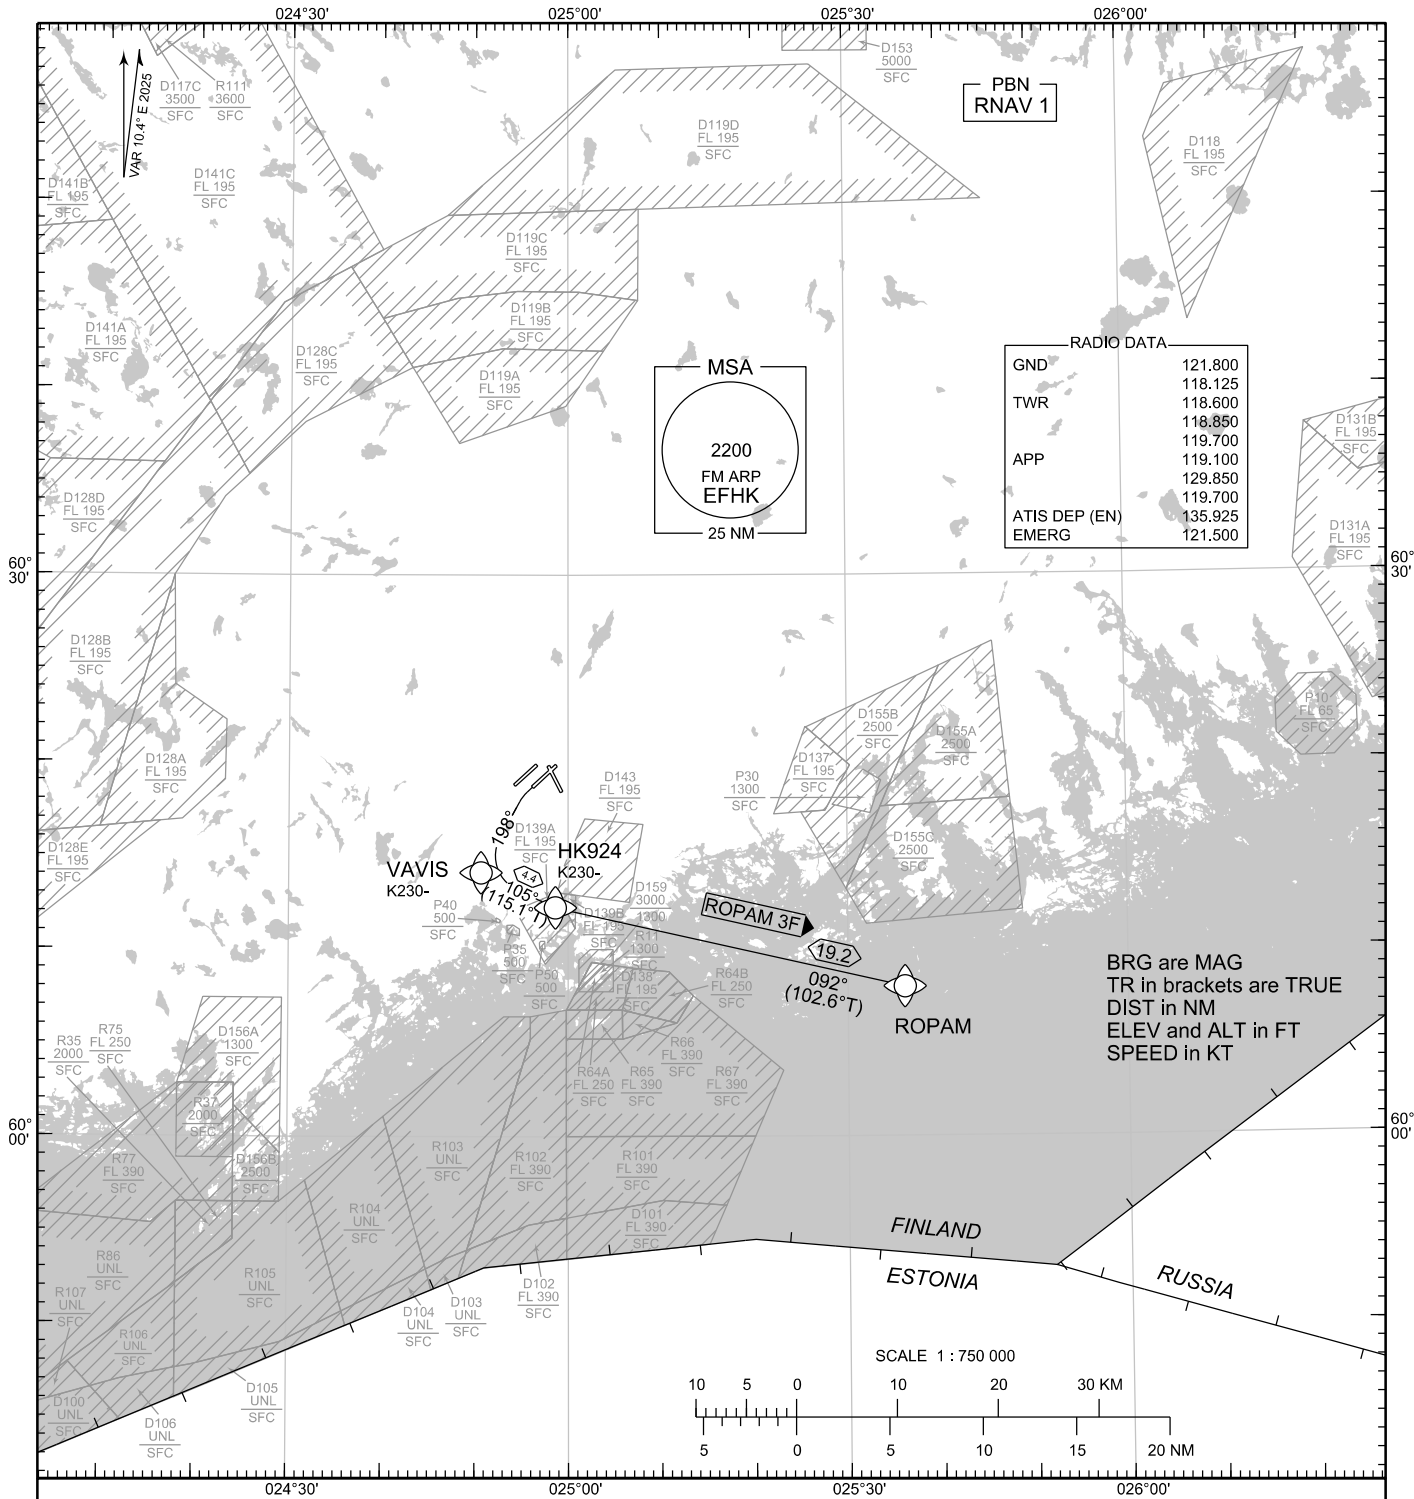

RNAV SID PROP RWY 22L
ROPAM 3F

DME/DME OPS:	NOT SUPPORTED	INITIAL CLIMB:	MNM TURNING ALTITUDE ACCORDING TO RTE CODING. PDG 5.0 % (304 FT/NM) UNTIL 4000 FT BASED ON AIRSPACE RESTRICTIONS.
ROUTES:	RNAV PROC CODING ON THE VERSO OF THE CHART	CLIMB ALTITUDE:	CLIMB TO 4000 FT OR ASSIGNED ALTITUDE IF LOWER. CLIMB TO A HIGHER LEVEL ONLY WHEN CLEARED BY ATC.
USAGE:	ONLY FOR AIRCRAFT IN WAKE TURBULENCE CATEGORY L OR M AND NOT EXCEEDING FLYOVER NOISE LEVEL 89 EPNdB ACCORDING TO ICAO ANNEX 16, CHAPTER 3.	RADIO CONTACT:	MAINTAIN TWR FREQ UNTIL 1500 FT, THEN CONTACT HELSINKI RADAR FREQ 119.100.
SQUAWK:	WHEN LINING UP SQUAWK THE ASSIGNED CODE	NOISE ABATEMENT:	ACCORDING TO EFHK AD 2.21.3
ADDITIONS TO SID:	INSTRUCTIONS CONTAINING DEVIATIONS FROM THE SID (TEMPORARY ALTITUDE RESTRICTIONS ETC) MAY BE INCLUDED IN THE ATC CLEARANCE PRIOR TO TAKE-OFF.	AREA MNM ALT:	SEE AMA INDEX, AIP ENR 6.1 - 3

CHG: radio data

EFHK RNAV SID PROP RWY 22L										
RTE NAV SPEC	SEQ NR	P/T	WPT		MAG	GEO TR	DIST NM	Turn Direction	Constraints	
			ID	Flyover					LVL	Speed
ROPAM 3F RNAV 1	010	CA	-	-	217°	227.4°T	-		A730+	
	020	CF	VAVIS	-	198°	208.4°T	-			K230-
	030	TF	HK924	-	105°	115.1°T	4.4			K230-
	040	TF	ROPAM	-	092°	102.6°T	19.2			

WPT COORD
SEE PAGE EFHK AD 2.15 - 1