


STANDARD ARRIVAL CHART -INSTRUMENT

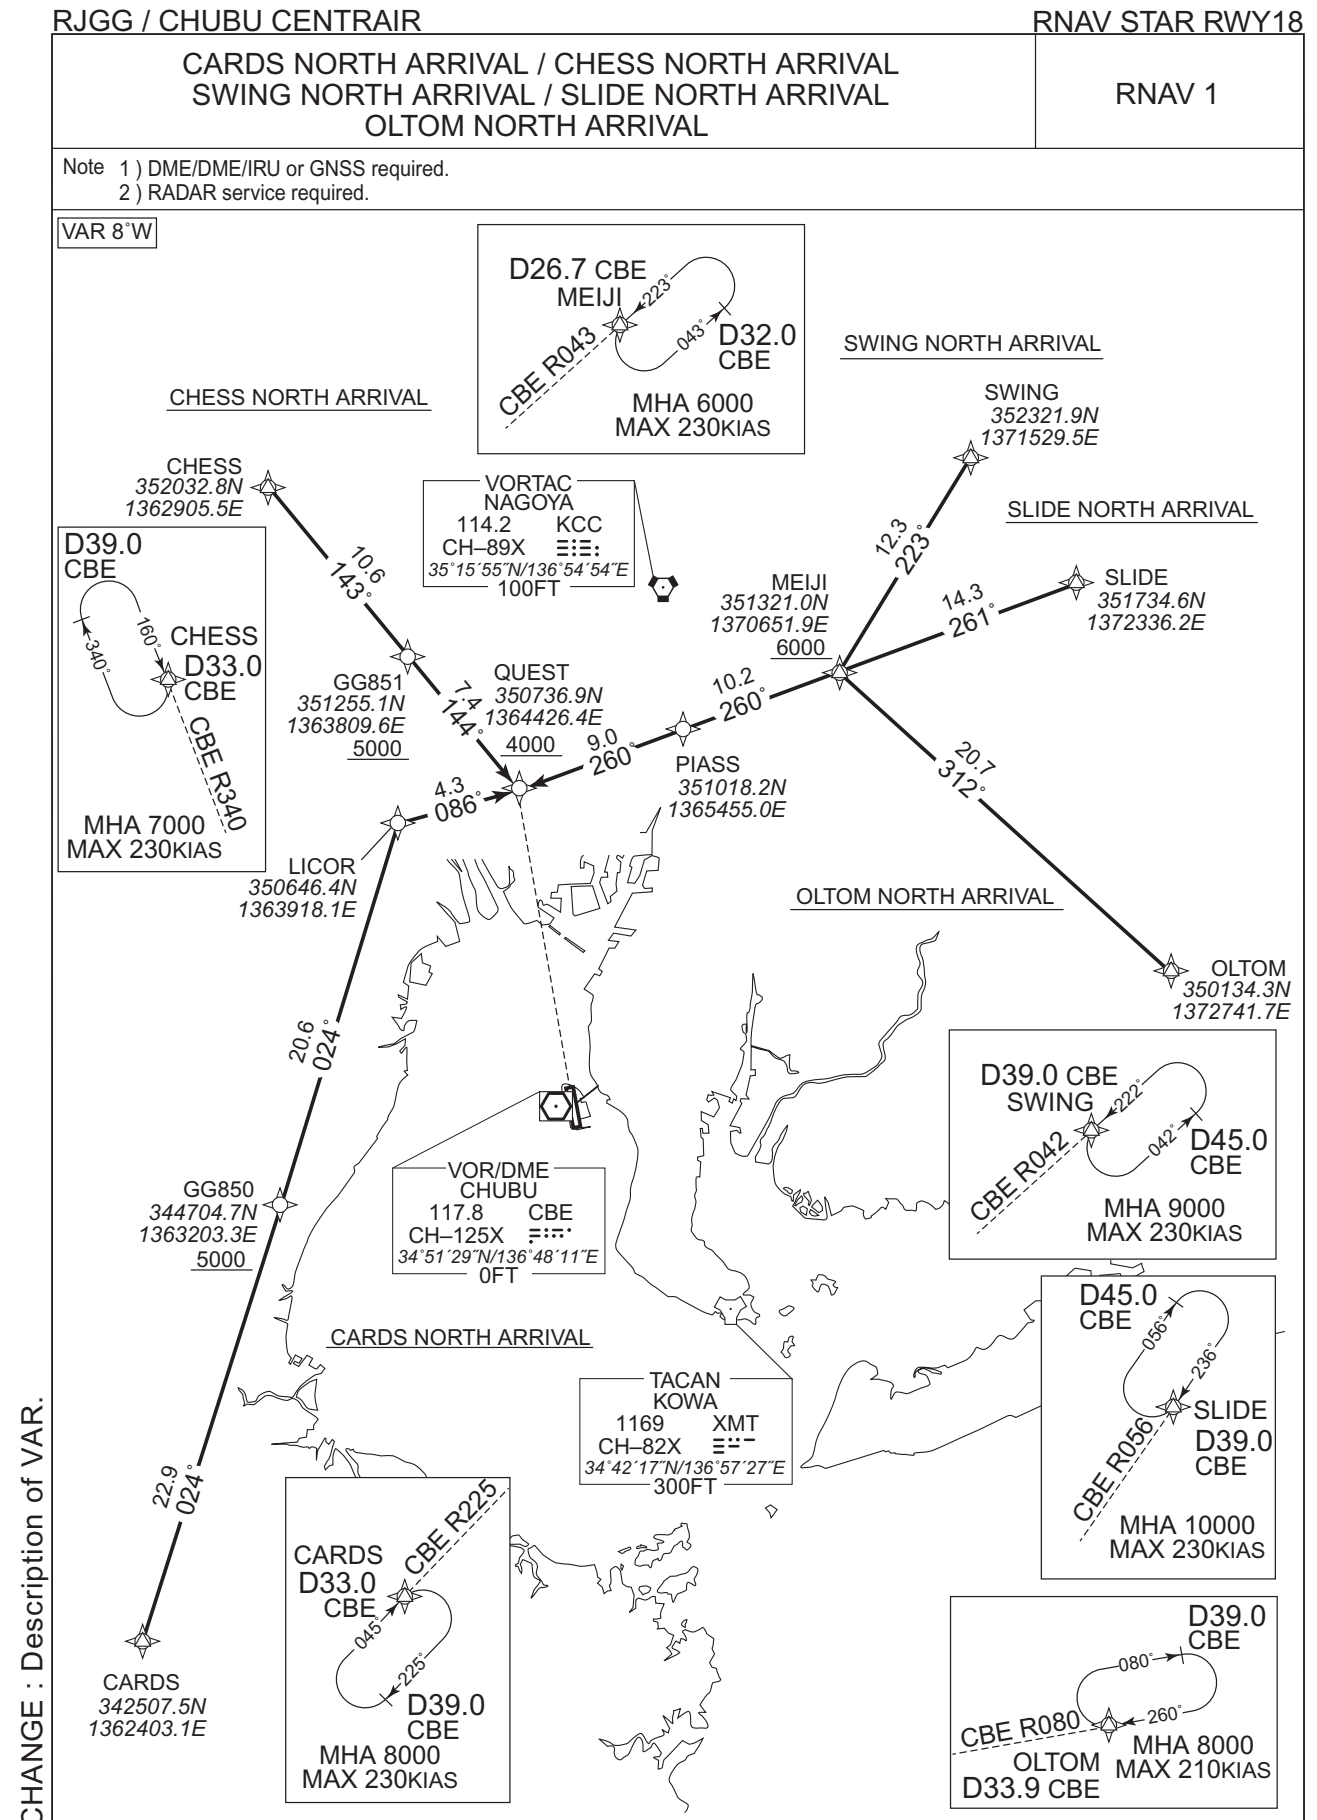

STANDARD ARRIVAL CHART -INSTRUMENT

RJGG / CHUBU CENTRAIR

RNAV STAR RWY18

CARDS NORTH ARRIVAL

From CARDS, to GG850 at or above 5000FT, to LICOR, to QUEST at or above 4000FT.

Critical DME	KCC : 17.5NM to LICOR~10.5NM to LICOR 7.0NM to LICOR~QUEST
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	CARDS	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	GG850	—	024 (016.7)	-7.6	22.9	—	+5000	—	—	RNAV1
003	TF	LICOR	—	024 (016.8)	-7.6	20.6	—	—	—	—	RNAV1
004	TF	QUEST	—	086 (078.7)	-7.6	4.3	—	+4000	—	—	RNAV1

CHESS NORTH ARRIVAL

From CHESS, to GG851 at or above 5000FT, to QUEST at or above 4000FT.

Critical DME	CBE : 5.6NM to GG851~GG851 KCC : GG851~QUEST
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	CHESS	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	GG851	—	143 (135.8)	-7.6	10.6	—	+5000	—	—	RNAV1
003	TF	QUEST	—	144 (135.9)	-7.6	7.4	—	+4000	—	—	RNAV1

CHANGE : VAR

STANDARD ARRIVAL CHART -INSTRUMENT

RJGG / CHUBU CENTRAIR

RNAV STAR RWY18

SWING NORTH ARRIVAL

From SWING, to MEIJI at or above 6000FT, to PIASS, to QUEST at or above 4000FT.

Critical DME	KCC : SWING~1.0NM to PIASS 6.0NM to QUEST~QUEST CBE : 2.0NM to PIASS~1.0NM to PIASS XMT : 6.0NM to QUEST~3.0NM to QUEST
DME GAP	1.0NM to PIASS~6.0NM to QUEST
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SWING	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	MEIJI	—	223 (215.1)	-7.6	12.3	—	+6000	—	—	RNAV1
003	TF	PIASS	—	260 (252.7)	-7.6	10.2	—	—	—	—	RNAV1
004	TF	QUEST	—	260 (252.6)	-7.6	9.0	—	+4000	—	—	RNAV1

SLIDE NORTH ARRIVAL

From SLIDE, to MEIJI at or above 6000FT, to PIASS, to QUEST at or above 4000FT.

Critical DME	KCC : SLIDE~1.0NM to PIASS 6.0NM to QUEST~QUEST CBE : 2.0NM to PIASS~1.0NM to PIASS XMT : 6.0NM to QUEST~3.0NM to QUEST
DME GAP	1.0NM to PIASS~6.0NM to QUEST
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SLIDE	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	MEIJI	—	261 (252.9)	-7.6	14.3	—	+6000	—	—	RNAV1
003	TF	PIASS	—	260 (252.7)	-7.6	10.2	—	—	—	—	RNAV1
004	TF	QUEST	—	260 (252.6)	-7.6	9.0	—	+4000	—	—	RNAV1

CHANGE : VAR

STANDARD ARRIVAL CHART -INSTRUMENT

RJGG / CHUBU CENTRAIR

RNAV STAR RWY18

OLTOM NORTH ARRIVAL

From OLTOM, to MEIJI at or above 6000FT, to PIASS, to QUEST at or above 4000FT.

Critical DME	KCC : MEIJI~1.0NM to PIASS 6.0NM to QUEST~QUEST CBE : 2.0NM to PIASS~1.0NM to PIASS XMT : 6.0NM to QUEST~3.0NM to QUEST
DME GAP	1.0NM to PIASS~6.0NM to QUEST
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OLTOM	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	MEIJI	—	312 (304.8)	-7.6	20.7	—	+6000	—	—	RNAV1
003	TF	PIASS	—	260 (252.7)	-7.6	10.2	—	—	—	—	RNAV1
004	TF	QUEST	—	260 (252.6)	-7.6	9.0	—	+4000	—	—	RNAV1

CHANGE : New PROC (OLTOM NORTH), Abolition PROC (DARTS NORTH)