


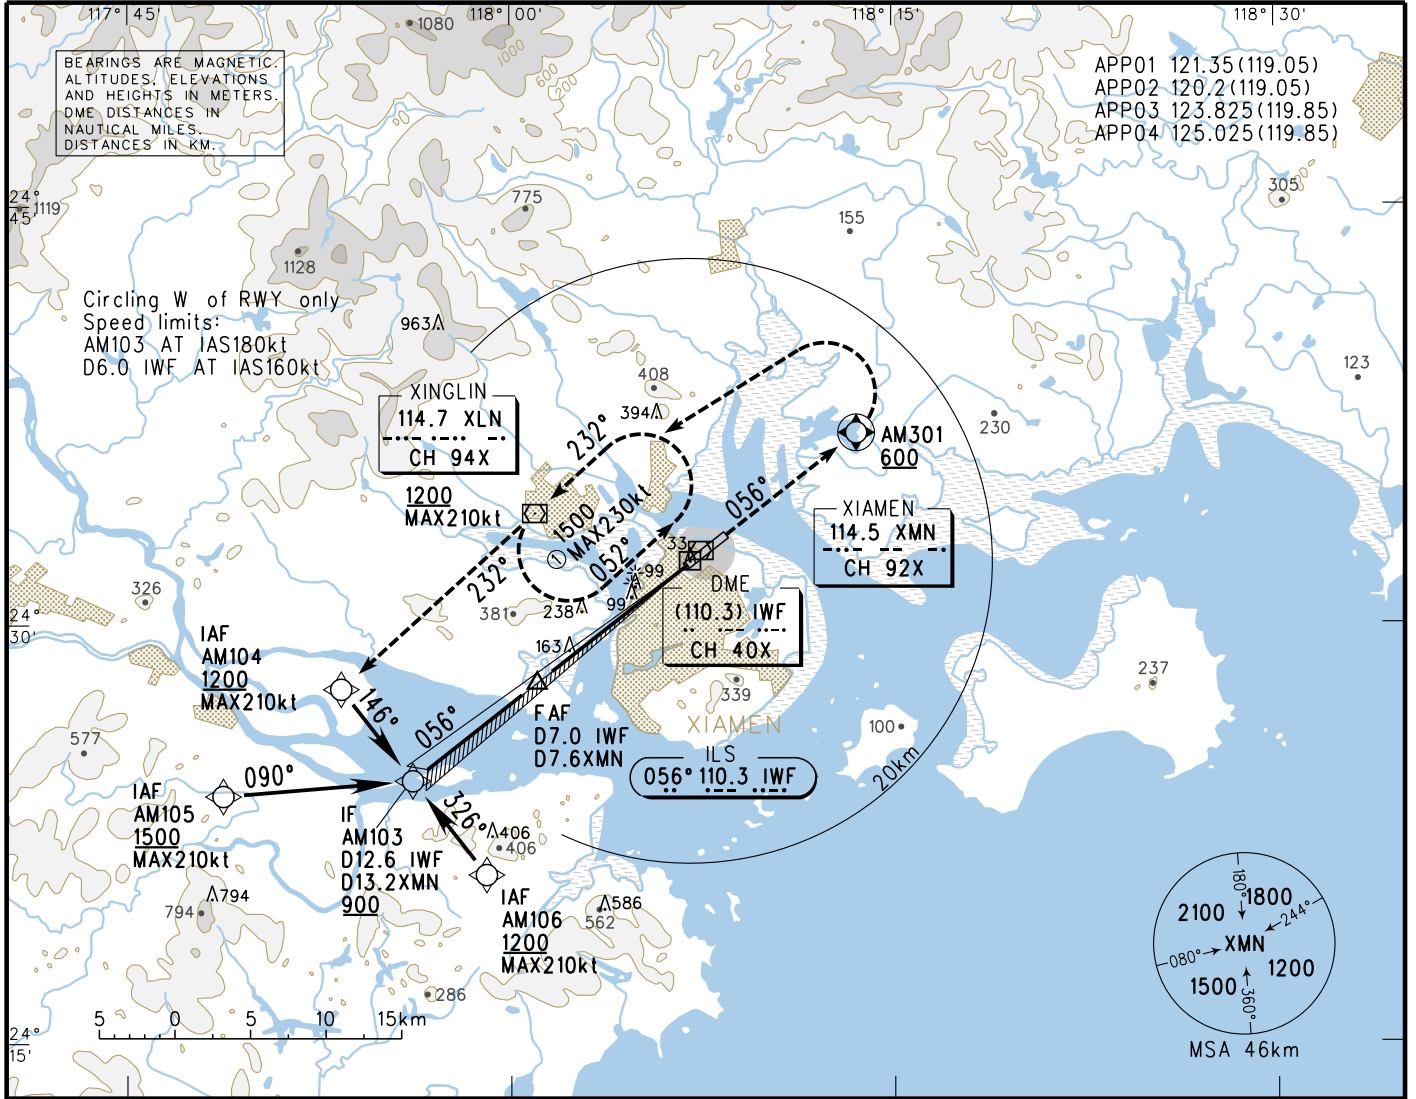

GP INOP

DME (IWF) (NM)

ALT (m)

6

5

4

3

599

502

405

308

TL 3600

TA 3000

3300(QNH ≥ 1031hPa)

2700(QNH ≤ 979hPa)

IF

AM103

D12.6 IWF

D13.2XMN

FAF

GP INOP

D7.0 IWF

D7.6XMN

700(683)

GP INOP

D2.9 IWF

D3.5XMN

300(283)

MAPt

GP INOP

D1.2 IWF

D1.8XMN

900(883)

550

255

MDA

RDH=15

23.1km

12.7

5.1

2.0

0.3

1.3

THR05 DISPLACED 150m

MISSED APPROACH

Climb straight and fly over AM301 at 600 or above, turn LEFT to XLN at 1200 or above, continue fly to AM104, approach again, or join the holding pattern and follow ATC instruction.

	A	B	C	D	FAF-MAPt(GP INOP) 10.7km								
ILS/DME	DA(H)	78(60)				GS in	kt	80	100	120	140	160	180
	RVR/VIS	800/800				km/h		150	185	220	260	295	335
GP INOP	MDA(H)	220(203)		220(203)	220(203)	Time	min:sec	4:20	3:28	2:53	2:29	2:10	1:56
	VIS	3000		3200	3400	Rate of descent	m/s	2.2	2.7	3.2	3.8	4.3	4.9
CIRCLING	MDA(H)	310(292)		390(372)	530(512)	① HUD CAT I: (DH)(45), (RA)(55), RVR450 ② RVR 550m can be implemented when using approved HUD or AP or FD for ILS/DME approach.							
	VIS	4400		5000	5000								