


**INSTRUMENT APPROACH CHART - ICAO**

ELEV 159  
OCH RELATED TO THR 25 ELEV 159

MUENSTER/OSNABRUECK ATIS 127.180  
LANGEN RADAR 129.300  
MUENSTER TOWER 129.805  
282.125


MUENSTER TOWER 120.365  
MUENSTER GROUND 121.880  
282.125

**MUENSTER/OSNABRUECK ILS CAT II & III or LOC RWY 25**

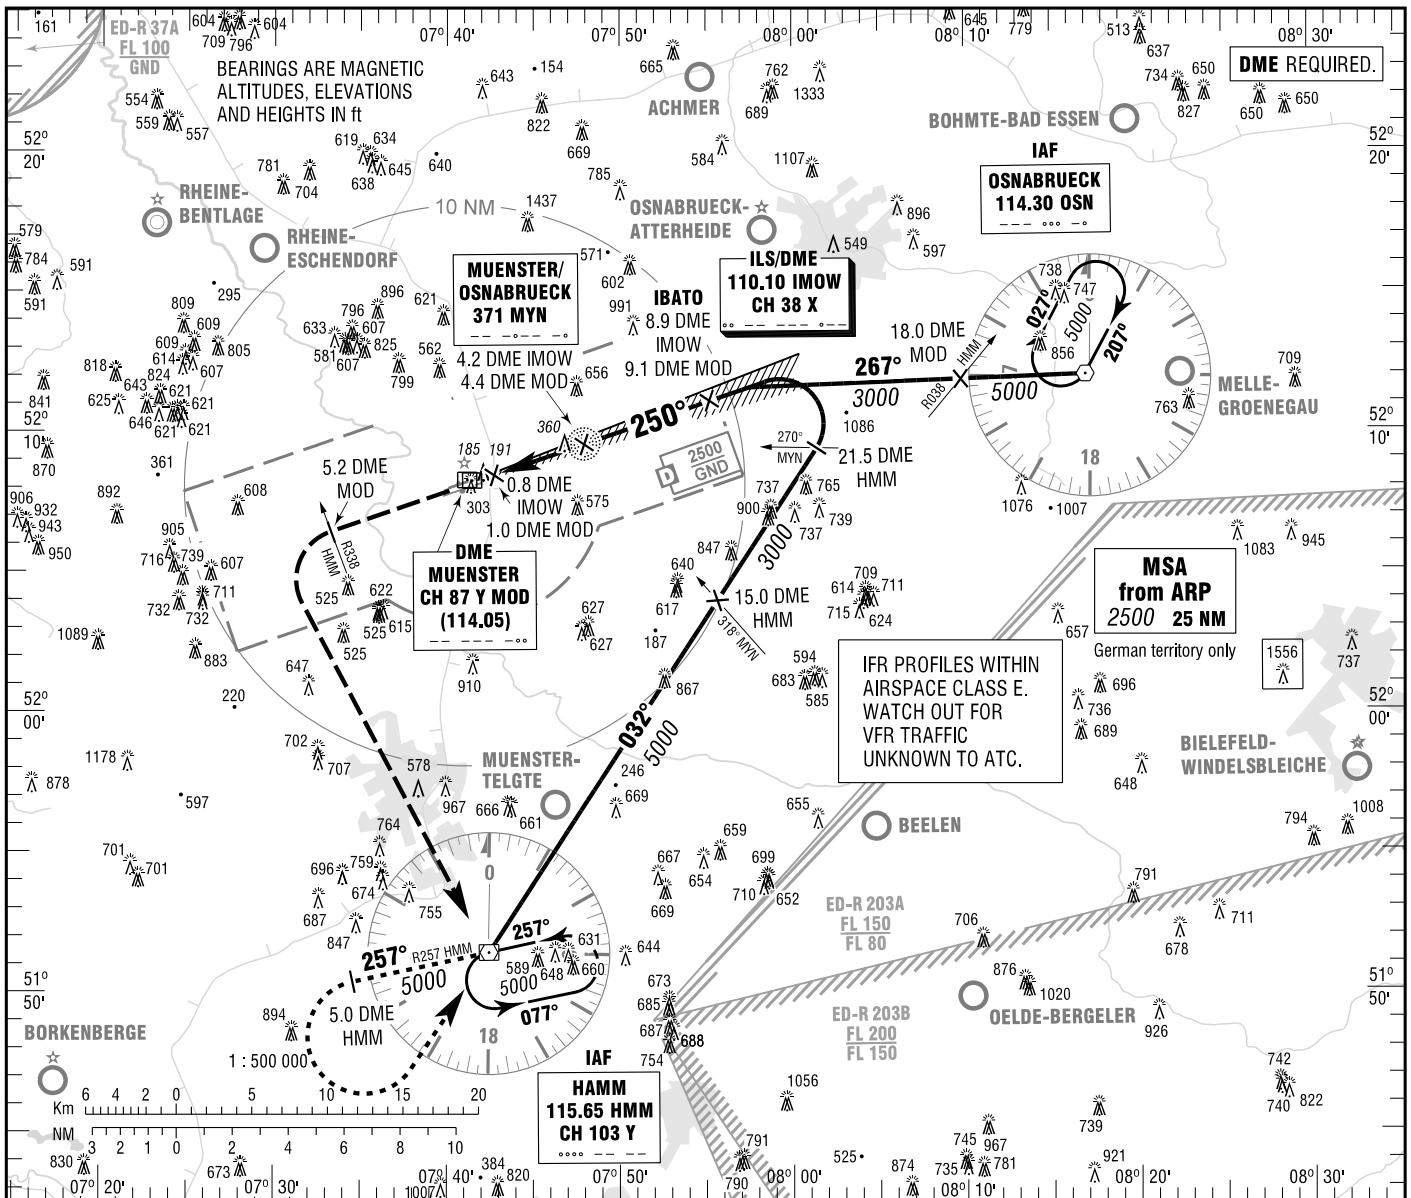

**MISSED APPROACH PROCEDURE**

Climb straight ahead to 5.2 DME MOD (crossing R338 HMM); LT to HMM DVOR/DME climbing to 5000.

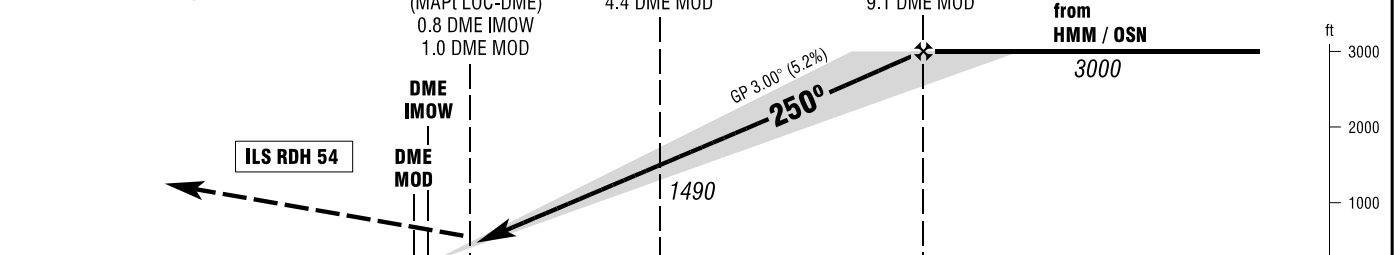

Correction: ILS RDH value. PROFILE SCALE 1 : 250 000

OCA (OCH)	A	B	C	D
ILS/DME CAT I	317 (158)	326 (167)	342 (183)	352 (193)
ILS/DME CAT II	228 (69)	244 (85)	257 (98)	271 (112)
LOC-DME	610 (450)	610 (450)	610 (450)	610 (450)

DME IMOW	2	3	4	5	6	7	8
DIST THR	1.8	2.8	3.8	4.8	5.8	6.8	7.8
ALTITUDE	800	1120	1440	1750	2070	2390	2710

**LOC-DME:** Timing not authorized for defining the MAPt.

GS	kt	80	100	120	140	160	180
4.2 DME IMOW - THR (4.0 NM)	MIN:SEC	3:00	2:24	2:00	1:43	1:30	1:20
Rate of descent (5.2%)	ft / MIN	420	530	640	740	850	960

CAT III APPROVED (MNM RVR 175M).