


INSTRUMENT APPROACH CHART

RJOK / KOCHI


RNP Y RWY14(AR)

KANSAI APP 125.0 - 124.8	RNP AR RF required.	KOCHI TOWER 118.75 - 126.2	RADAR AVBL ATIS 126.45
-----------------------------	------------------------	-------------------------------	---------------------------

For uncompensated Baro-VNAV systems, procedure not authorized below -5°C / above 45°C

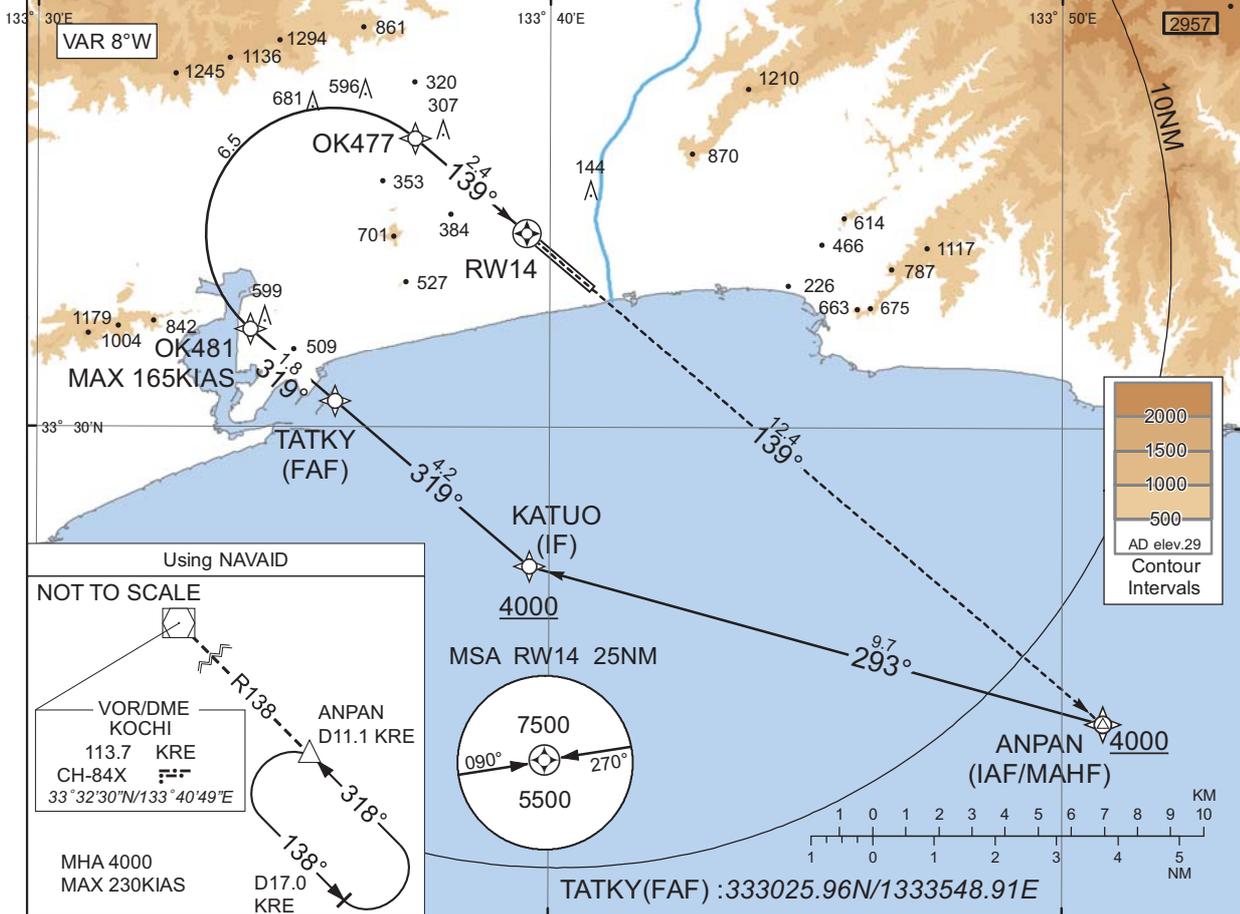

CHANGE : PROC course. VAR. MSA. RNAV HLDG abolished.

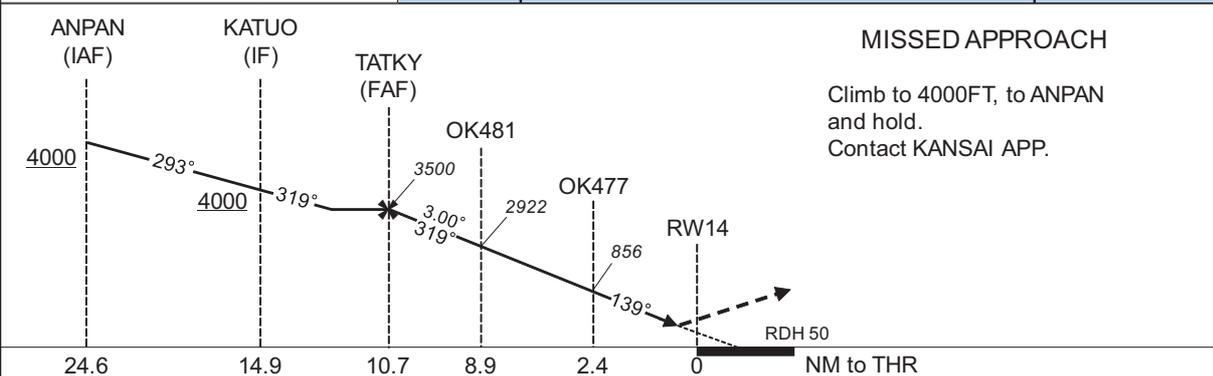

MINIMA	THR elev. 42		AD elev. 29	
	RNP 0.14		RNP 0.30	
CAT	DA(H)	CMV	DA(H)	CMV
A	-	-	-	-
B	-	-	-	-
C	342(300)	1400	611(569)	1600
D		1600		1800

**Authorization Required**

INSTRUMENT APPROACH CHART

RJOK / KOCHI

RNP Y RWY14(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	ANPAN	-	-	-7.9	-	-	+4000	-	-	-
002	TF	KATUO	-	293 (285.5)	-7.9	9.7	-	+4000	-	-	1.0
003	TF	TATKY	-	319 (310.6)	-7.9	4.2	-	3500	-	-	1.0
004	TF	OK481	-	319 (310.6)	-7.9	1.8	-	2922	-165	-3.00	0.14 0.30
005	RF Center: OKRF2 r=2.07NM	OK477	-	-	-7.9	6.5	R	856	-	-3.00	0.14 0.30
006	TF	RW14	Y	139 (130.6)	-7.9	2.4	-	92	-	-3.00/50	0.14 0.30
007	TF	ANPAN	-	139 (130.6)	-7.9	12.4	-	4000	-	-	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
ANPAN	332507.54N / 1335048.52E	OKRF2	333311.37N / 1333545.65E
KATUO	332742.79N / 1333937.02E		
TATKY	333025.96N / 1333548.91E		
OK481	333136.96N / 1333409.51E		
OK477	333445.76N / 1333721.85E		
RW14	333312.04N / 1333932.98E		

CHANGE : PROC course. VAR.