


STANDARD DEPARTURE CHART - INSTRUMENT

RJFM/ MIYAZAKI

RNAV SID

KIRISHIMA TWO DEPARTURE		RNAV 1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.	Critical DME	RWY09 : NHT : 2NM FM DER — 2NM to FM900 RWY27 : NHT : 5NM to FM703 — FM703
	DME GAP	RWY09 : DER — 2NM FM DER RWY27 : DER — 5NM to FM703
	Inappropriate Nav aids	See AD 1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 8°W

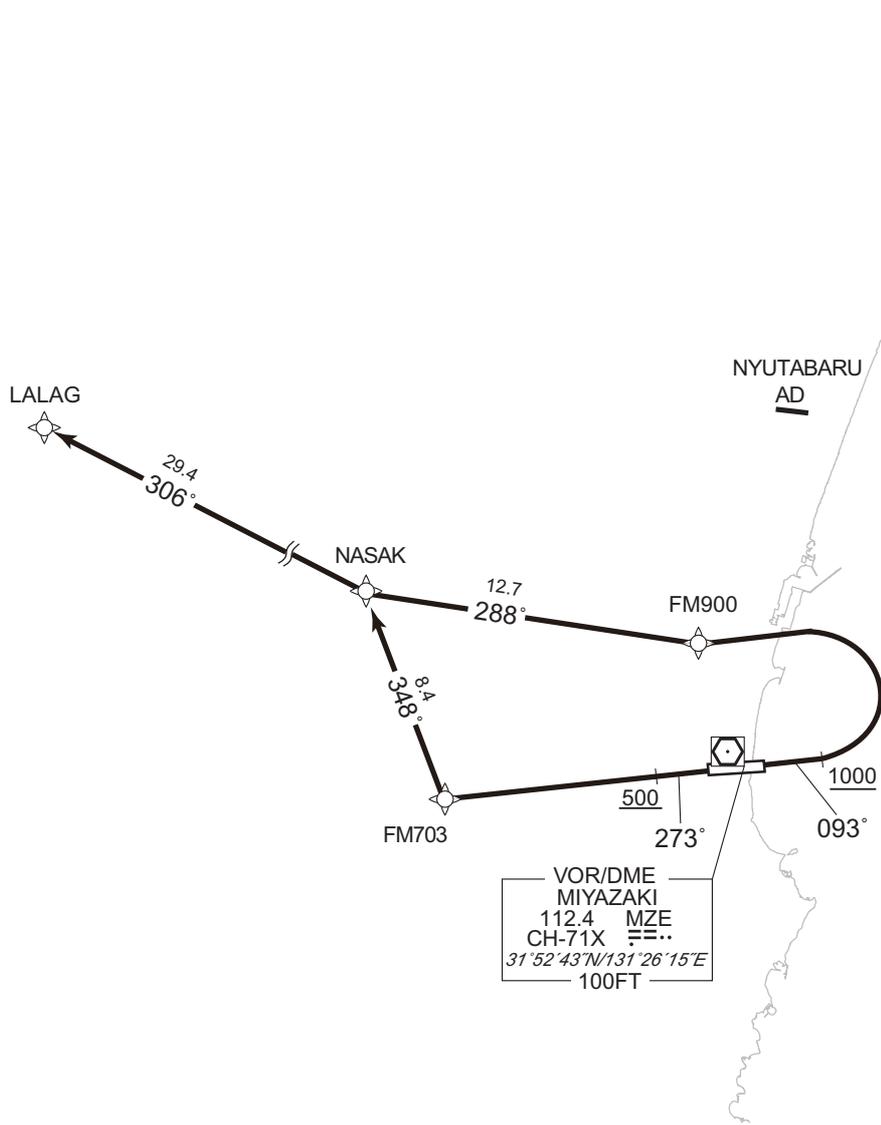

CHANGE : PROC renamed. VAR. PROC course.

RWY09 : Climb on HDG093° at or above 1000FT, turn left direct to FM900, to NASAK, to LALAG.
 RWY27 : Climb on HDG273° at or above 500FT, direct to FM703, to NASAK, to LALAG.
 Note RWY09 : 5.0% climb gradient required up to 1000FT.
 RWY27 : 5.0% climb gradient required up to 5000FT.
 OBST ALT 152FT located at 0.7NM 276° FM end of RWY27.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFM /MIYAZAKI

RNAV SID

KIRISHIMA TWO DEPARTURE

RWY09

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	093 (085.2)	-7.5	-	-	+1000	-	-	RNAV1
002	DF	FM900	-	-	-7.5	-	L	-	-	-	RNAV1
003	TF	NASAK	-	288 (280.1)	-7.5	12.7	-	-	-	-	RNAV1
004	TF	LALAG	-	306 (298.6)	-7.5	29.4	-	-	-	-	RNAV1

RWY27

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	273 (265.2)	-7.5	-	-	+500	-	-	RNAV1
002	DF	FM703	-	-	-7.5	-	-	-	-	-	RNAV1
003	TF	NASAK	-	348 (340.6)	-7.5	8.4	-	-	-	-	RNAV1
004	TF	LALAG	-	306 (298.6)	-7.5	29.4	-	-	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates
FM900	315726.5N / 1312601.1E
FM703	315144.1N / 1311433.9E
NASAK	315939.9N / 1311116.4E
LALAG	321338.3N / 1304049.6E

CHANGE : PROC renamed. PROC course. VAR. Waypoint Coordinates added.