


INSTRUMENT APPROACH CHART

RJDC / YAMAGUCHI-UBE

RNP RWY07(AR)

TSUIKI APP 119.225 - 315.9	RNP AR RF required.	UBE RADIO 118.05 - 126.2	RADAR AVBL CALL TSUIKI APP
-------------------------------	------------------------	-----------------------------	----------------------------------


For uncompensated Baro-VNAV systems, procedure not authorized below -5°C / above 45°C

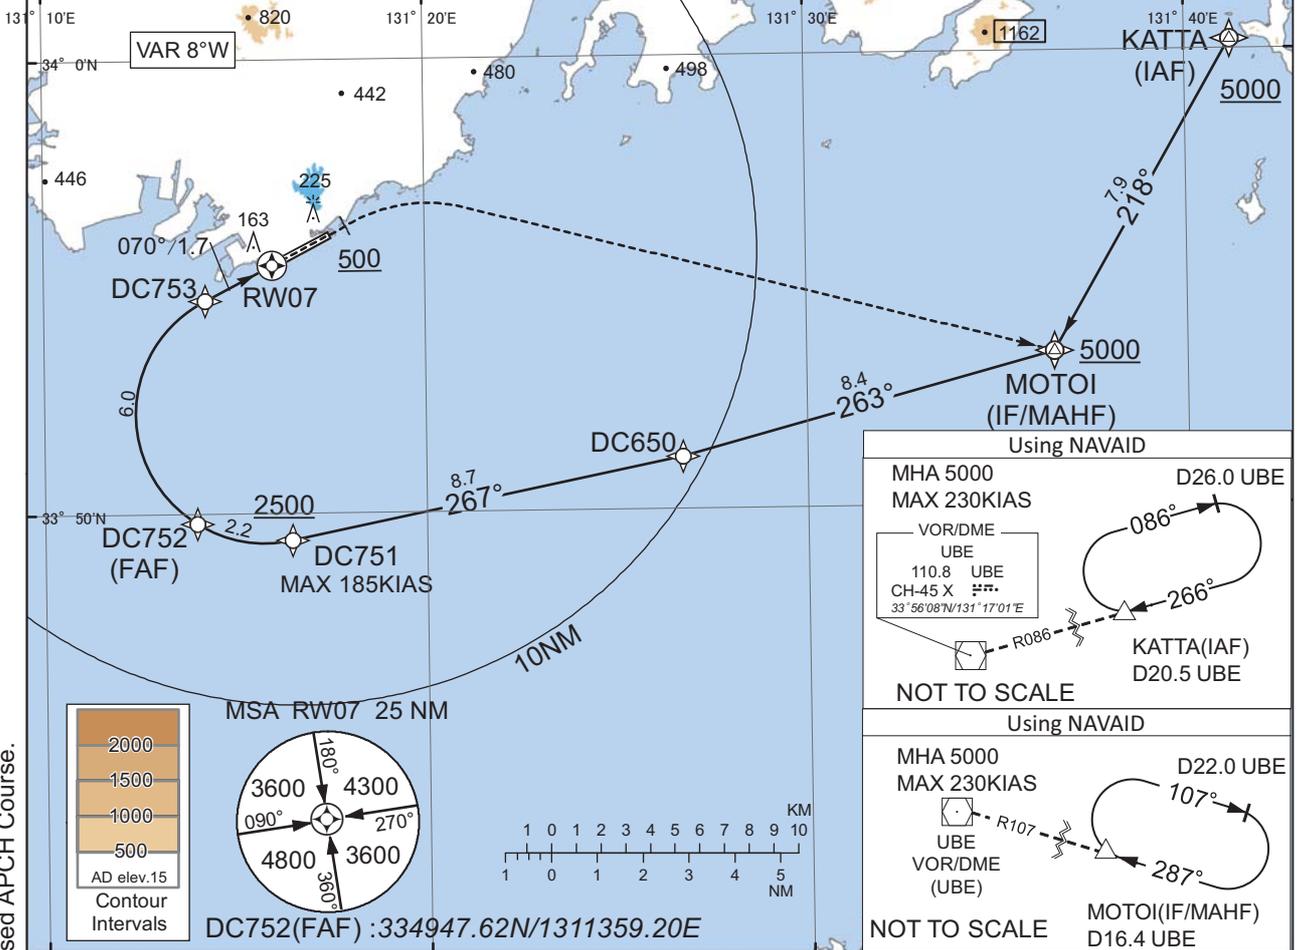

CHANGE : VAR. PROC Course. MSA(BTN 180° and 270°). Missed APCH Course.

MISSED APPROACH

From RW07 on track 070°, at or above 500FT turn right, direct to MOTOI and hold at 5000FT. Contact TSUIKI APP.

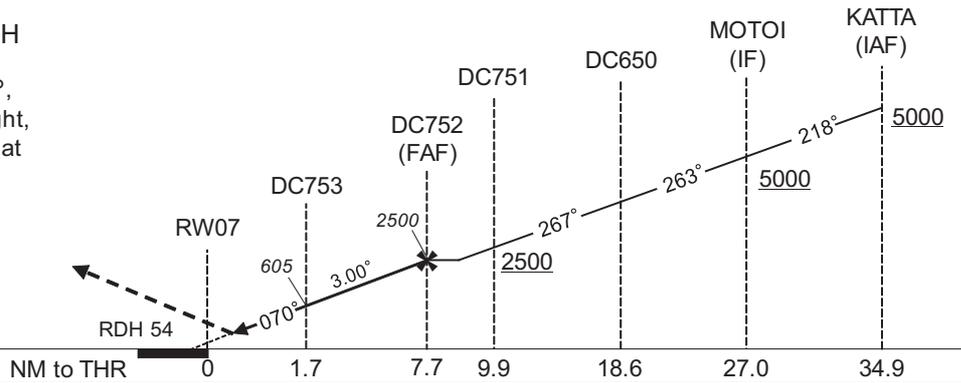

MINIMA	THR elev. 23	AD elev. 15
CAT	RNP 0.30	
	DA(H)	RVR/CMV
A	-	-
B	-	-
C	324(301)	1000
D	-	1400

Authorization Required

INSTRUMENT APPROACH CHART

RJDC / YAMAGUCHI-UBE

RNP RWY07(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	KATTA	-	-	-8.2	-	-	+5000	-	-	-
002	TF	MOTOI	-	218 (209.7)	-8.2	7.9	-	+5000	-	-	1.0
003	TF	DC650	-	263 (254.7)	-8.2	8.4	-	-	-	-	1.0
004	TF	DC751	-	267 (258.4)	-8.2	8.7	-	+2500	-185	-	1.0
005	RF Center: DCRF1 r=2.83NM	DC752	-	-	-8.2	2.2	R	2500	-	-	1.0
006	RF Center: DCRF1 r=2.83NM	DC753	-	-	-8.2	6.0	R	605	-	-3.00	0.3
007	TF	RW07	Y	070 (062.1)	-8.2	1.7	-	77	-	-3.00/54	0.3
008	FA	-	-	070 (062.1)	-8.2	-	-	+500	-	-	1.0
009	DF	MOTOI	-	-	-8.2	-	R	5000	-	-	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KATTA	340013.04N / 1314112.84E	DCRF1	335211.33N / 1311547.68E
MOTOI	335323.26N / 1313630.85E		
DC650	335109.96N / 1312644.12E		
DC751	334924.96N / 1311628.63E		
DC752	334947.62N / 1311359.20E		
DC753	335442.44N / 1311414.70E		
RW07	335528.81N / 1311600.47E		

CHANGE : PROC Course. VAR.