


HOTSPOT MAP (NOT FOR NAVIGATION)


Bearings are magnetic		TWR 131.225	
Distances in metres			
Elevations in feet AMSL			
Coordinates WGS84			
RWY	QFU	THR	BEARING STRENGTH
12	124	44° 01' 36.49"N 012° 36' 00.23"E	PCN 79/F/A/W/T
30	304	44° 00' 49.43"N 012° 37' 24.61"E	PCN 79/F/A/W/T

AD ELEV	41	RIMINI/Miramare	
APRON ELEV	28	L I P R	44° 01' 10"N 012° 36' 34"E



REMARKS
(1) TWY B must be used only as EXIT
(2) TWY H must be used only as exit by MIL ACFT
(3) TWY G closed
(4)(*) CAT I Runway Holding Position
(5)(**) Intermediate Holding Position
(6) Not lighted and not usable by Civil ACFT
(7) Runway Guard Lights
(8) NO ENTRY Signs
(9) TWY Closed

CHANGE: Magnetic Variation/Annual change - QFU - RWY designation number

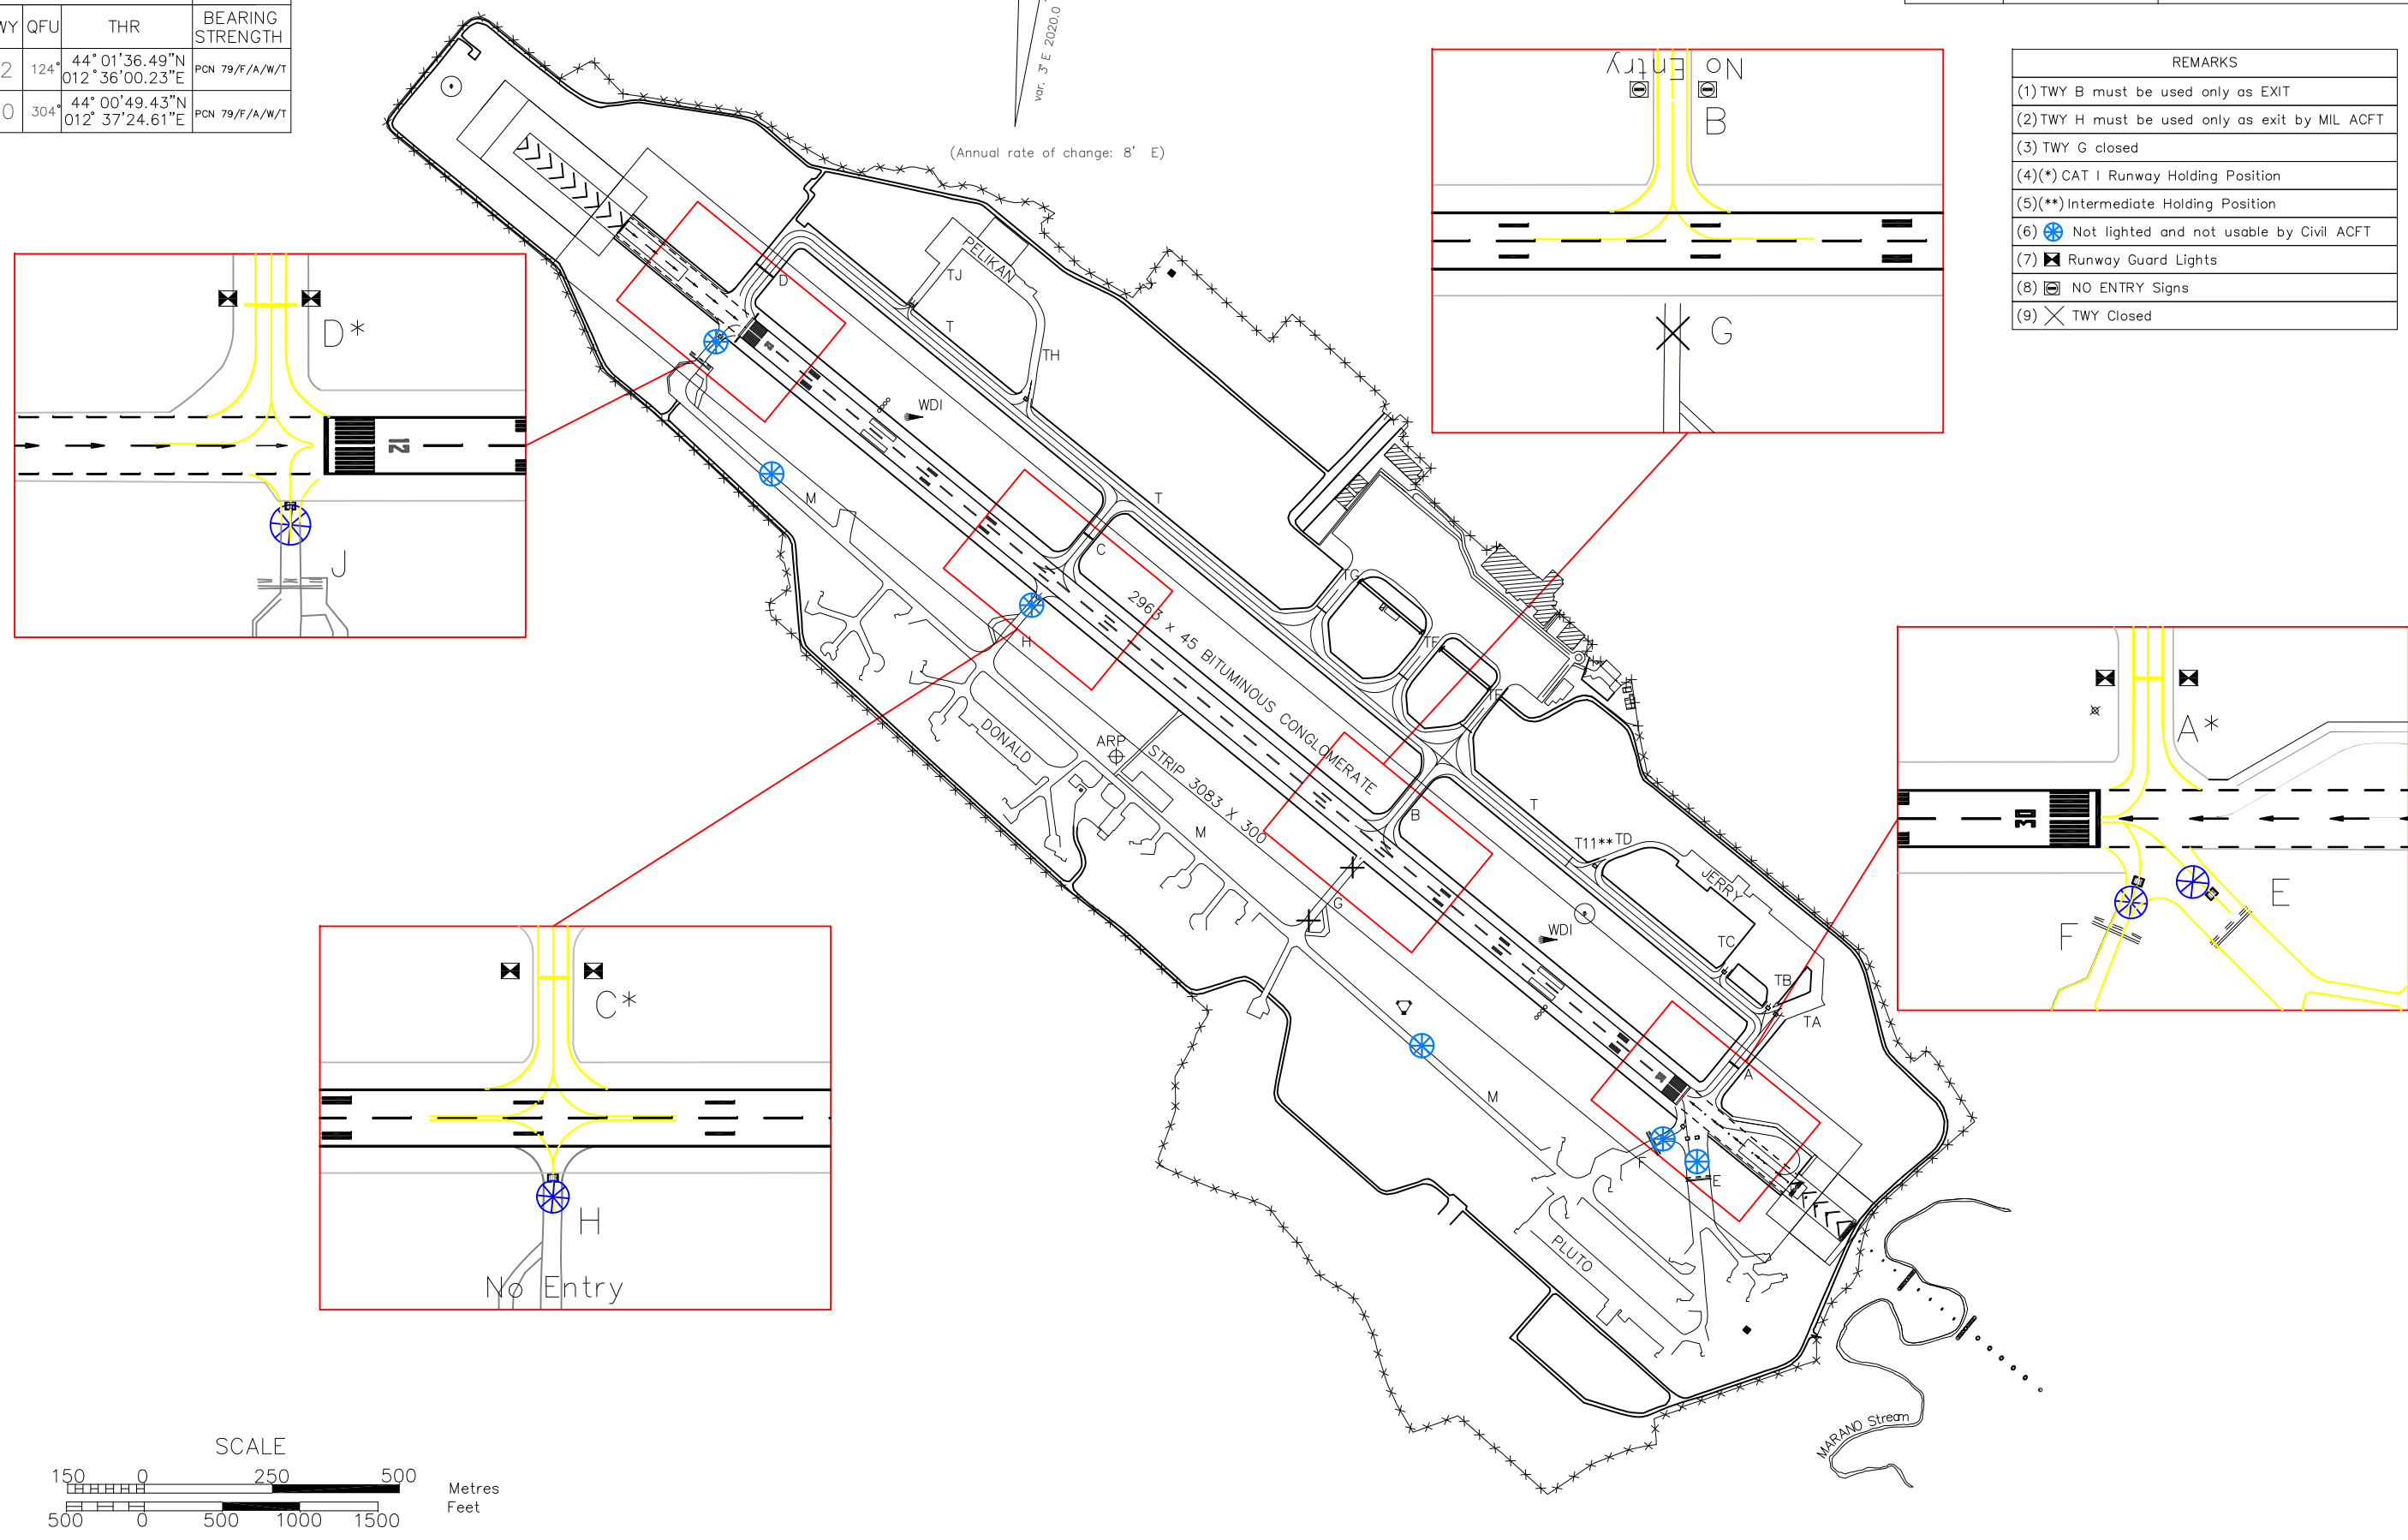

Data provided by Airiminum 2014 S.p.A.