


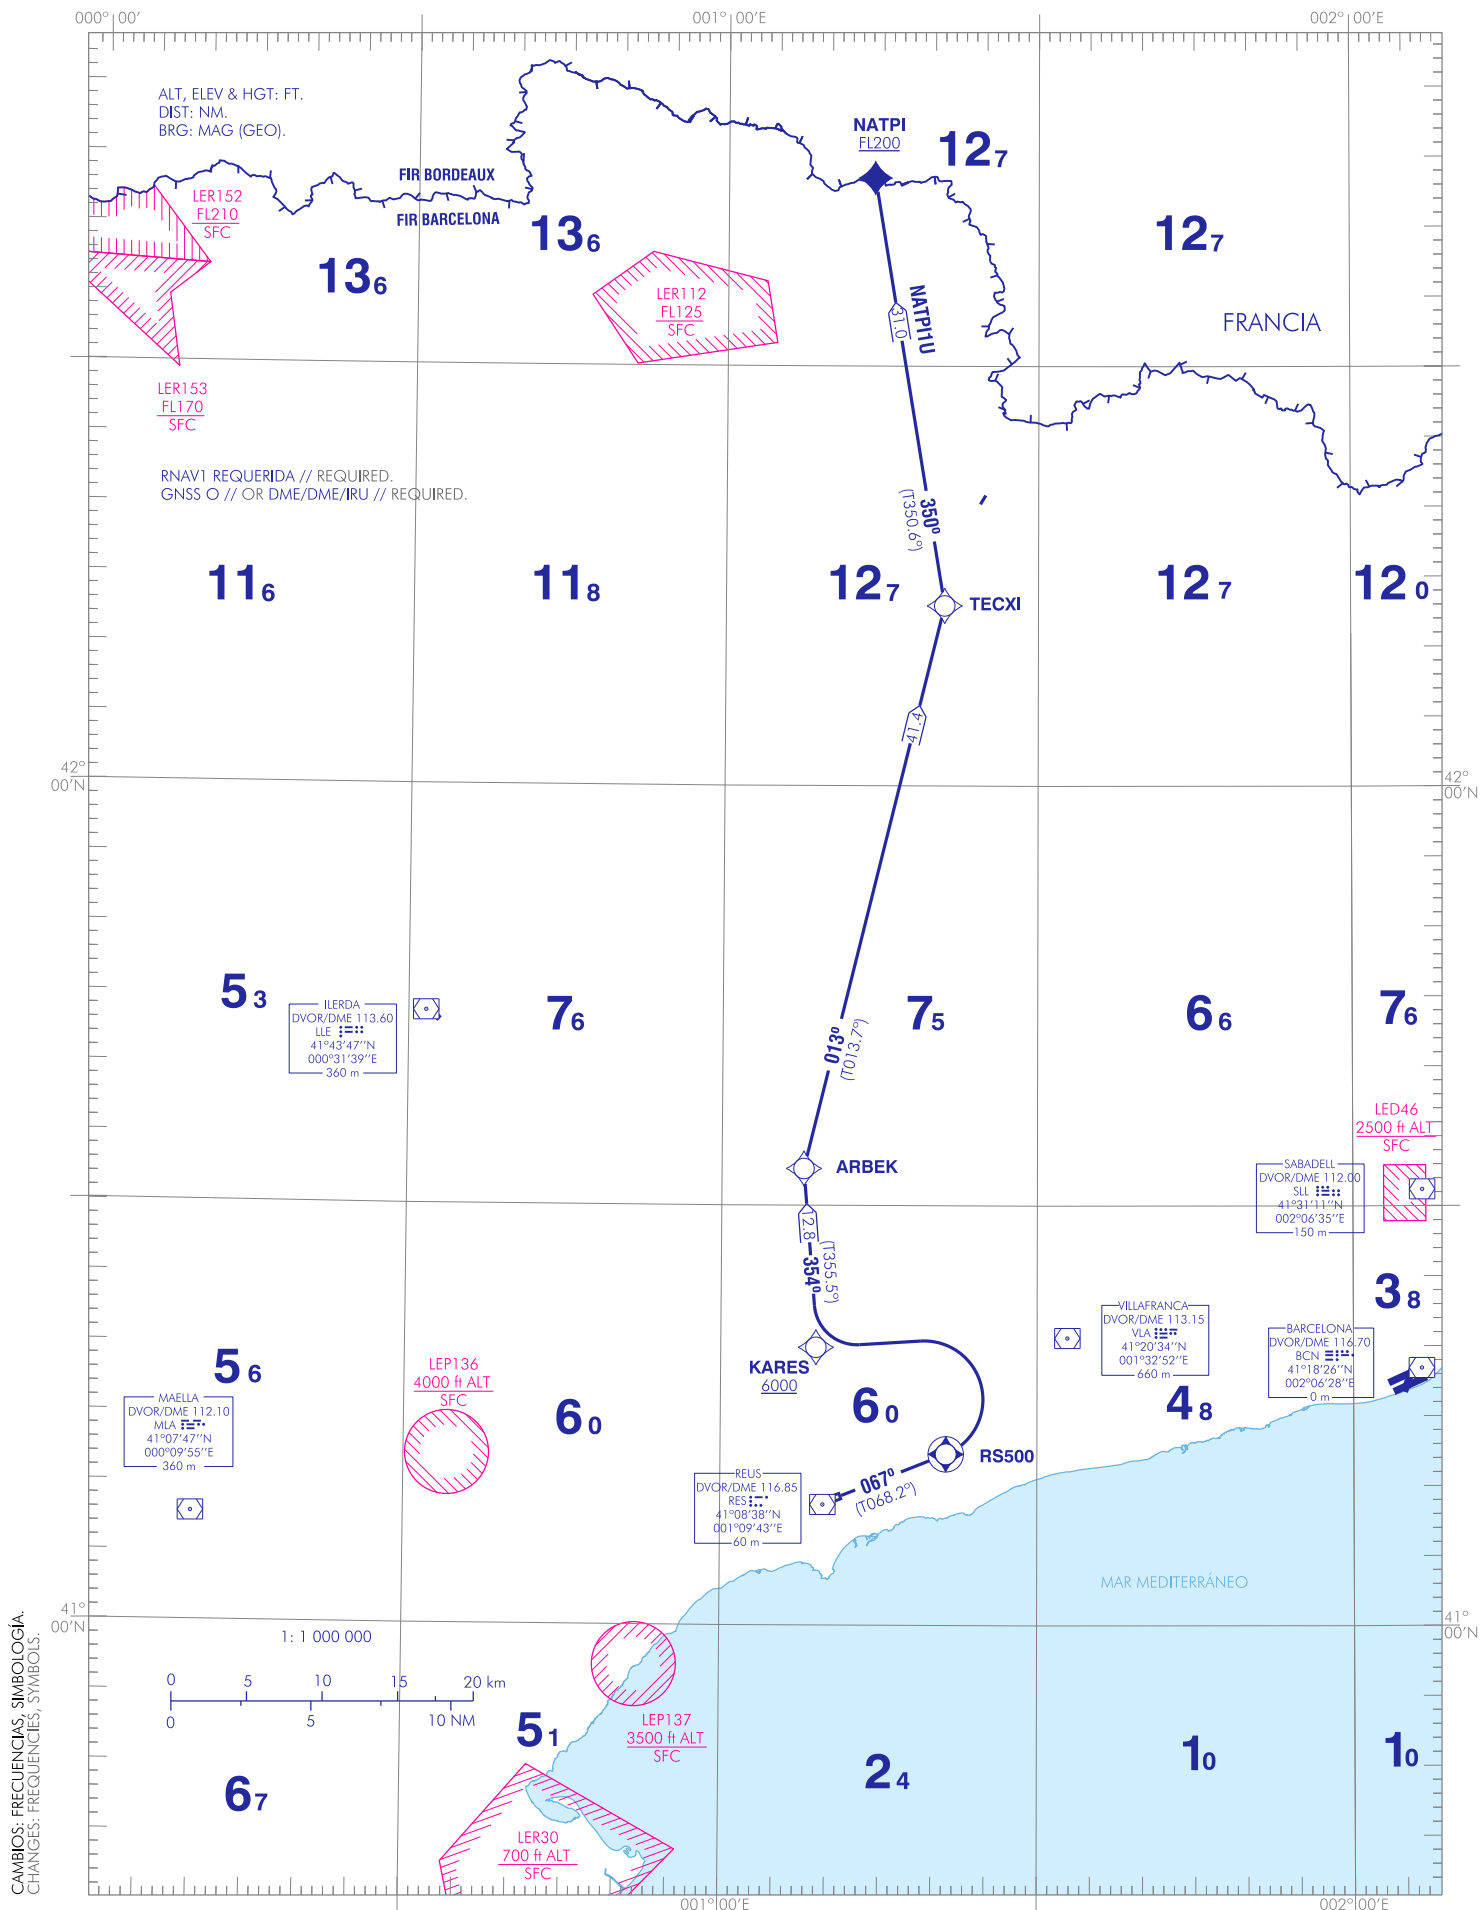

REUS AD

COORDENADAS WAYPOINTS // WAYPOINTS COORDINATES	
WPT	COORD
ARBK	41°32'37.9"N 001°07'47.2"E
KARE	41°19'51.7"N 001°09'07.8"E
NATP	42°43'26.0"N 001°14'08.9"E
RS50	41°12'15.0"N 001°21'22.0"E
TECX	42°12'52.9"N 001°20'58.8"E

SALIDAS NORMALIZADAS POR INSTRUMENTOS (SID) RNAV1

STANDARD INSTRUMENT DEPARTURES (SID) RNAV1

PISTA 07

RUNWAY 07

NOTAS APLICABLES A TODAS LAS SID:
– RNAV1 requerida.
– IAS MAX 250 kt a FL100 o inferior.

NOTES APPLICABLE TO ALL SID:
– RNAV1 required.
– MAX IAS 250 kt at FL100 or below.

DESCRIPCIÓN TABULAR DEL PROCEDIMIENTO PROCEDURE TABULAR DESCRIPTION											
Número de serie Serial number	Descriptor de trayectoria Path Terminator	Identificador de punto de recorrido Waypoint identifier	Sobrevuelo Fly-over	Curso/Derrota Course/Track °M (°T)	Variación magnética Magnetic variation	Distancia Distance (NM)	Dirección de viraje Turn direction	Altitud Altitude (ft)	Velocidad Speed (kt)	VPA/TCH (°/ft)	Especificación de navegación Navigation specification
NATP1U Pendiente mínima de ascenso 4.8 % hasta KARE. // Minimum climb gradient 4.8% up to KARE.											
001	CF	RS50	Y	067 (68.2)	-1.0	–	–	–	–	–	RNAV1
002	DF	KARE	–	–	-1.0	–	L	+6000	–	–	RNAV1
003	TF	ARBK	–	354 (355.5)	-1.0	12.8	–	–	–	–	RNAV1
004	TF	TECX	–	013 (013.7)	-1.0	41.4	–	–	–	–	RNAV1
005	TF	NATP	–	350 (350.6)	-1.0	31.0	–	+FL200	–	–	RNAV1