

STANDARD ARRIVAL CHART - INSTRUMENT


RJBB / KANSAI INTL

RNAV STAR RWY06L/06R

CANDY A ARRIVAL / NIXOV A ARRIVAL
IGLEV A ARRIVAL / ATMUG A ARRIVAL

RNP1

Note GNSS required.

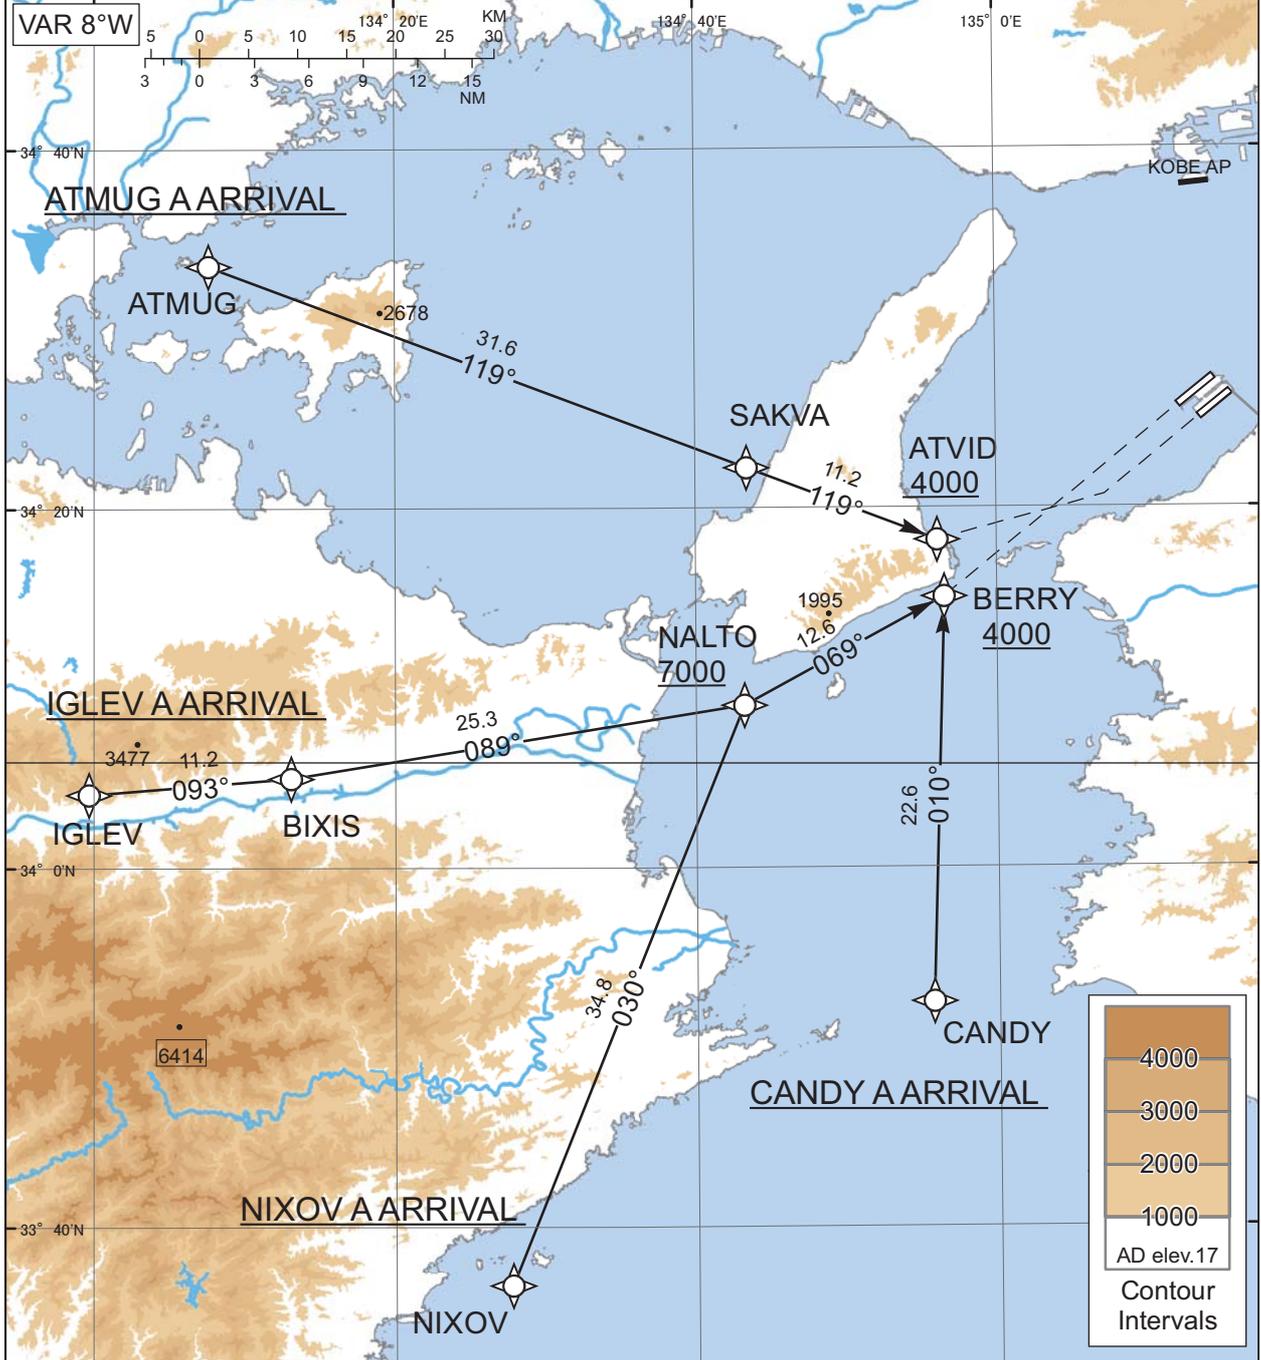

CHANGE : New PROC.

<p>1MIN(at or below FL140) 1.5MIN(above FL140) NOT TO SCALE</p> <p>ATMUG MHA 10000</p> <p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140)</p>	<p>1MIN(at or below FL140) 1.5MIN(above FL140) NOT TO SCALE</p> <p>IGLEV MHA 11000</p> <p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140)</p>	<p>1MIN(at or below FL140) 1.5MIN(above FL140) NOT TO SCALE</p> <p>NIXOV MHA 9000</p> <p>NOT TO SCALE</p> <p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140)</p>	<p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140) CANDY MHA 9000</p> <p>NOT TO SCALE</p> <p>1MIN(at or below FL140) 1.5MIN(above FL140)</p>
---	---	--	--

STANDARD ARRIVAL CHART - INSTRUMENT

RJBB / KANSAI INTL

RNAV STAR RWY06L/06R

CANDY A ARRIVAL

From CANDY, to BERRY at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	CANDY	-	-	-8.1	-	-	-	-	-	RNP1
002	TF	BERRY	-	010 (001.7)	-8.1	22.6	-	+4000	-	-	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	CANDY	322 (314.0)	-8.1	1.0 (-14000) 1.5 (+14001)	L	9000	-	-230 (-14000) -240 (+14001)	RNP1

NIXOV A ARRIVAL

From NIXOV, to NALTO at or above 7000FT, to BERRY at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	NIXOV	-	-	-8.1	-	-	-	-	-	RNP1
002	TF	NALTO	-	030 (021.7)	-8.1	34.8	-	+7000	-	-	RNP1
003	TF	BERRY	-	069 (061.2)	-8.1	12.6	-	+4000	-	-	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	NIXOV	064 (055.4)	-8.1	1.0 (-14000) 1.5 (+14001)	L	9000	-	-230 (-14000) -240 (+14001)	RNP1

CHANGE : New PROC.

STANDARD ARRIVAL CHART - INSTRUMENT

RJBB / KANSAI INTL

RNAV STAR RWY06L/06R

IGLEV A ARRIVAL

From IGLEV, to BIXIS, to NALTO at or above 7000FT, to BERRY at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	IGLEV	-	-	-8.1	-	-	-	-	-	RNP1
002	TF	BIXIS	-	093 (085.3)	-8.1	11.2	-	-	-	-	RNP1
003	TF	NALTO	-	089 (080.7)	-8.1	25.3	-	+7000	-	-	RNP1
004	TF	BERRY	-	069 (061.2)	-8.1	12.6	-	+4000	-	-	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	IGLEV	093 (085.2)	-8.1	1.0 (-14000) 1.5 (+14001)	L	11000	-	-230 (-14000) -240 (+14001)	RNP1

ATMUG A ARRIVAL

From ATMUG, to SAKVA, to ATVID at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ATMUG	-	-	-8.1	-	-	-	-	-	RNP1
002	TF	SAKVA	-	119 (110.7)	-8.1	31.6	-	-	-	-	RNP1
003	TF	ATVID	-	119 (111.1)	-8.1	11.2	-	+4000	-	-	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	ATMUG	181 (172.5)	-8.1	1.0 (-14000) 1.5 (+14001)	R	10000	-	-230 (-14000) -240 (+14001)	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
CANDY	335229.8N / 1345541.8E	ATMUG	343330.0N / 1340737.4E
NIXOV	333644.5N / 1342743.1E	SAKVA	342213.8N / 1344325.4E
IGLEV	340405.2N / 1335940.5E	ATVID	341811.4N / 1345605.1E
BIXIS	340459.0N / 1341305.7E		
NALTO	340900.6N / 1344313.3E		
BERRY	341502.0N / 1345631.6E		

CHANGE : New PROC.