



INSTRUMENT APPROACH CHART - ICAO

LYDD
RNP
RWY 03
(ACFT CAT A,B,C)




APP	120.705	LYDD APPROACH	AD ELEVATION	13
TWR	119.380	LYDD TOWER	THR ELEVATION	10
ATIS	129.230	LYDD INFORMATION	OBSTACLE ELEVATION	1240 AMSL (1230) (ABOVE THR)
			BEARINGS ARE MAGNETIC	

TRANSITION ALTITUDE
6000

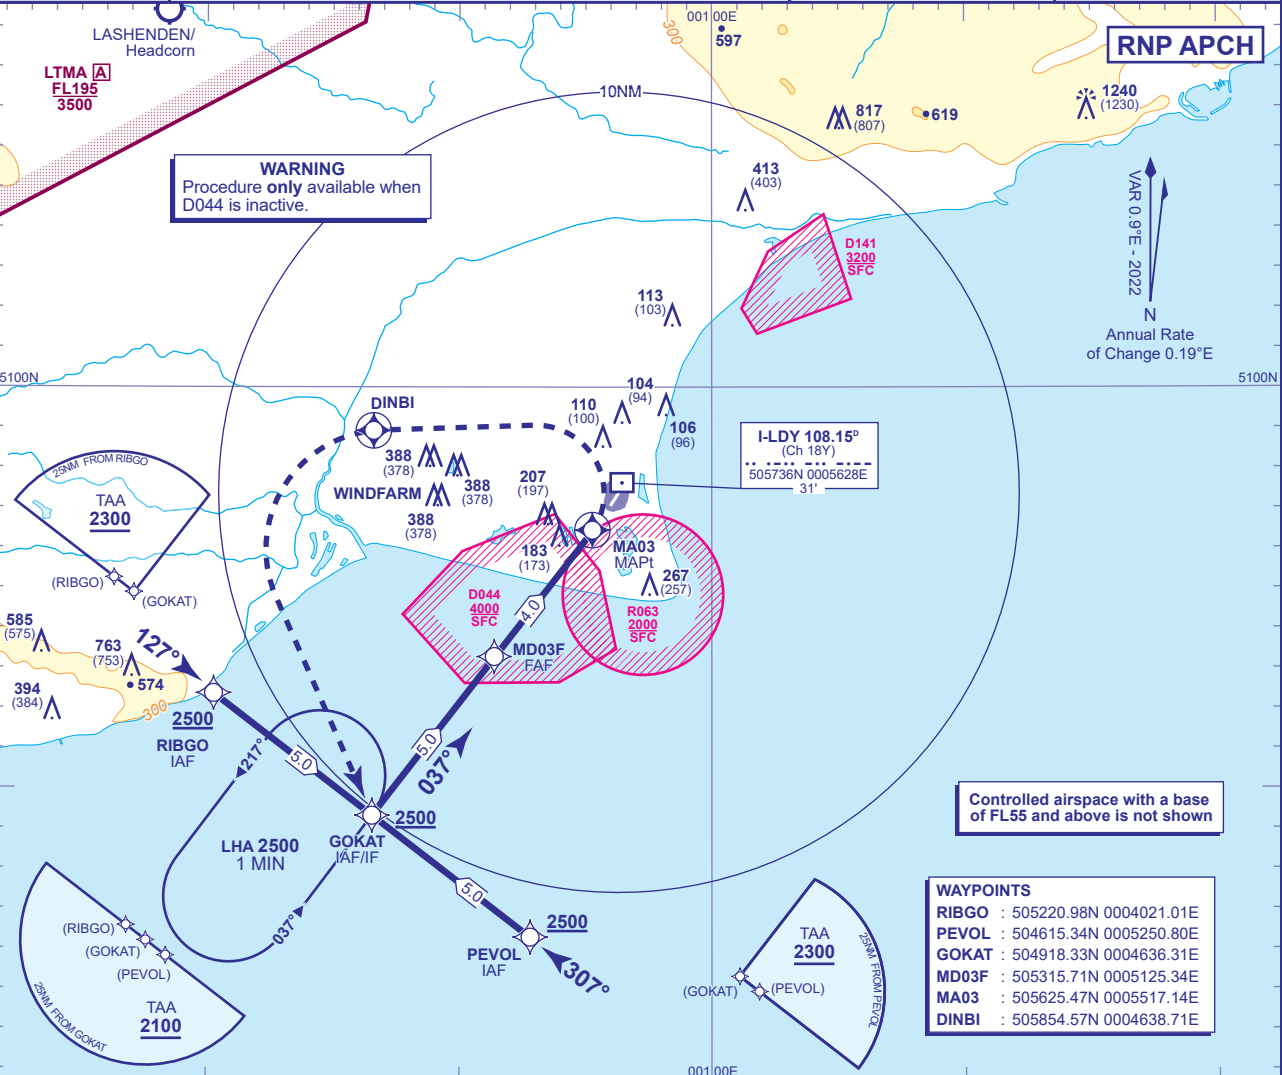

RECOMMENDED PROFILE Gradient 5.34%, 324FT/NM				
NM to MA03	4	3	2	1
ALT(HGT)	1600(1590)	1280(1270)	950(940)	630(620)

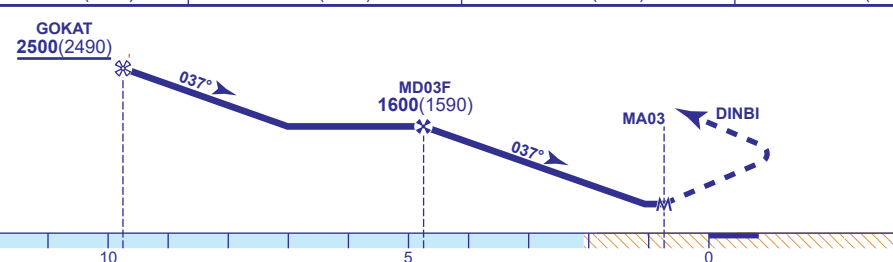

MAPt (LNAV): MA03
(0.75NM before THR RWY 03)
Turn left as soon as possible to
DINBI climbing to 2500 and
continue to GOKAT to join the
hold or as directed by ATC.

Aircraft Category		A	B	C	Rate of descent	G/S KT	160	140	120	100	80
OCA (OCH)		LNAV	430(420)	430(420)		FT/MIN	860	760	650	540	430
VM(C)OCA (OCH AAL)	Total Area	510(497)	NA	NA							
	West of RWY 03/21	NA	510(497)	790(777)							

NOTE 1 FAT offset 5° from RWY 03 C/L.
2 DME I-LDY will indicate 0.5NM at THR RWY 03.
3 Initial Approach MAX speed 210KIAS.
4 Danger Area activity information available on Lydd ATIS 129.225.

CHANGE (1/24): MAG VAR AND ANNUAL RATE OF CHANGE.