

**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**


TRANSITION ALTITUDE 6500

Warszawa APPROACH	125.055, 128.805, 129.380, 135.930	Okecie TOWER	118.305
Okecie DELIVERY	121.605	ATIS DEP	123.430
Okecie GROUND	121.905		

WARSAW CHOPIN AIRPORT

RNAV RWY 33

BAMSO 5K EVINA 4K LOLSI 5K
OLILA 5K SOXER 5K XIMBA 5K

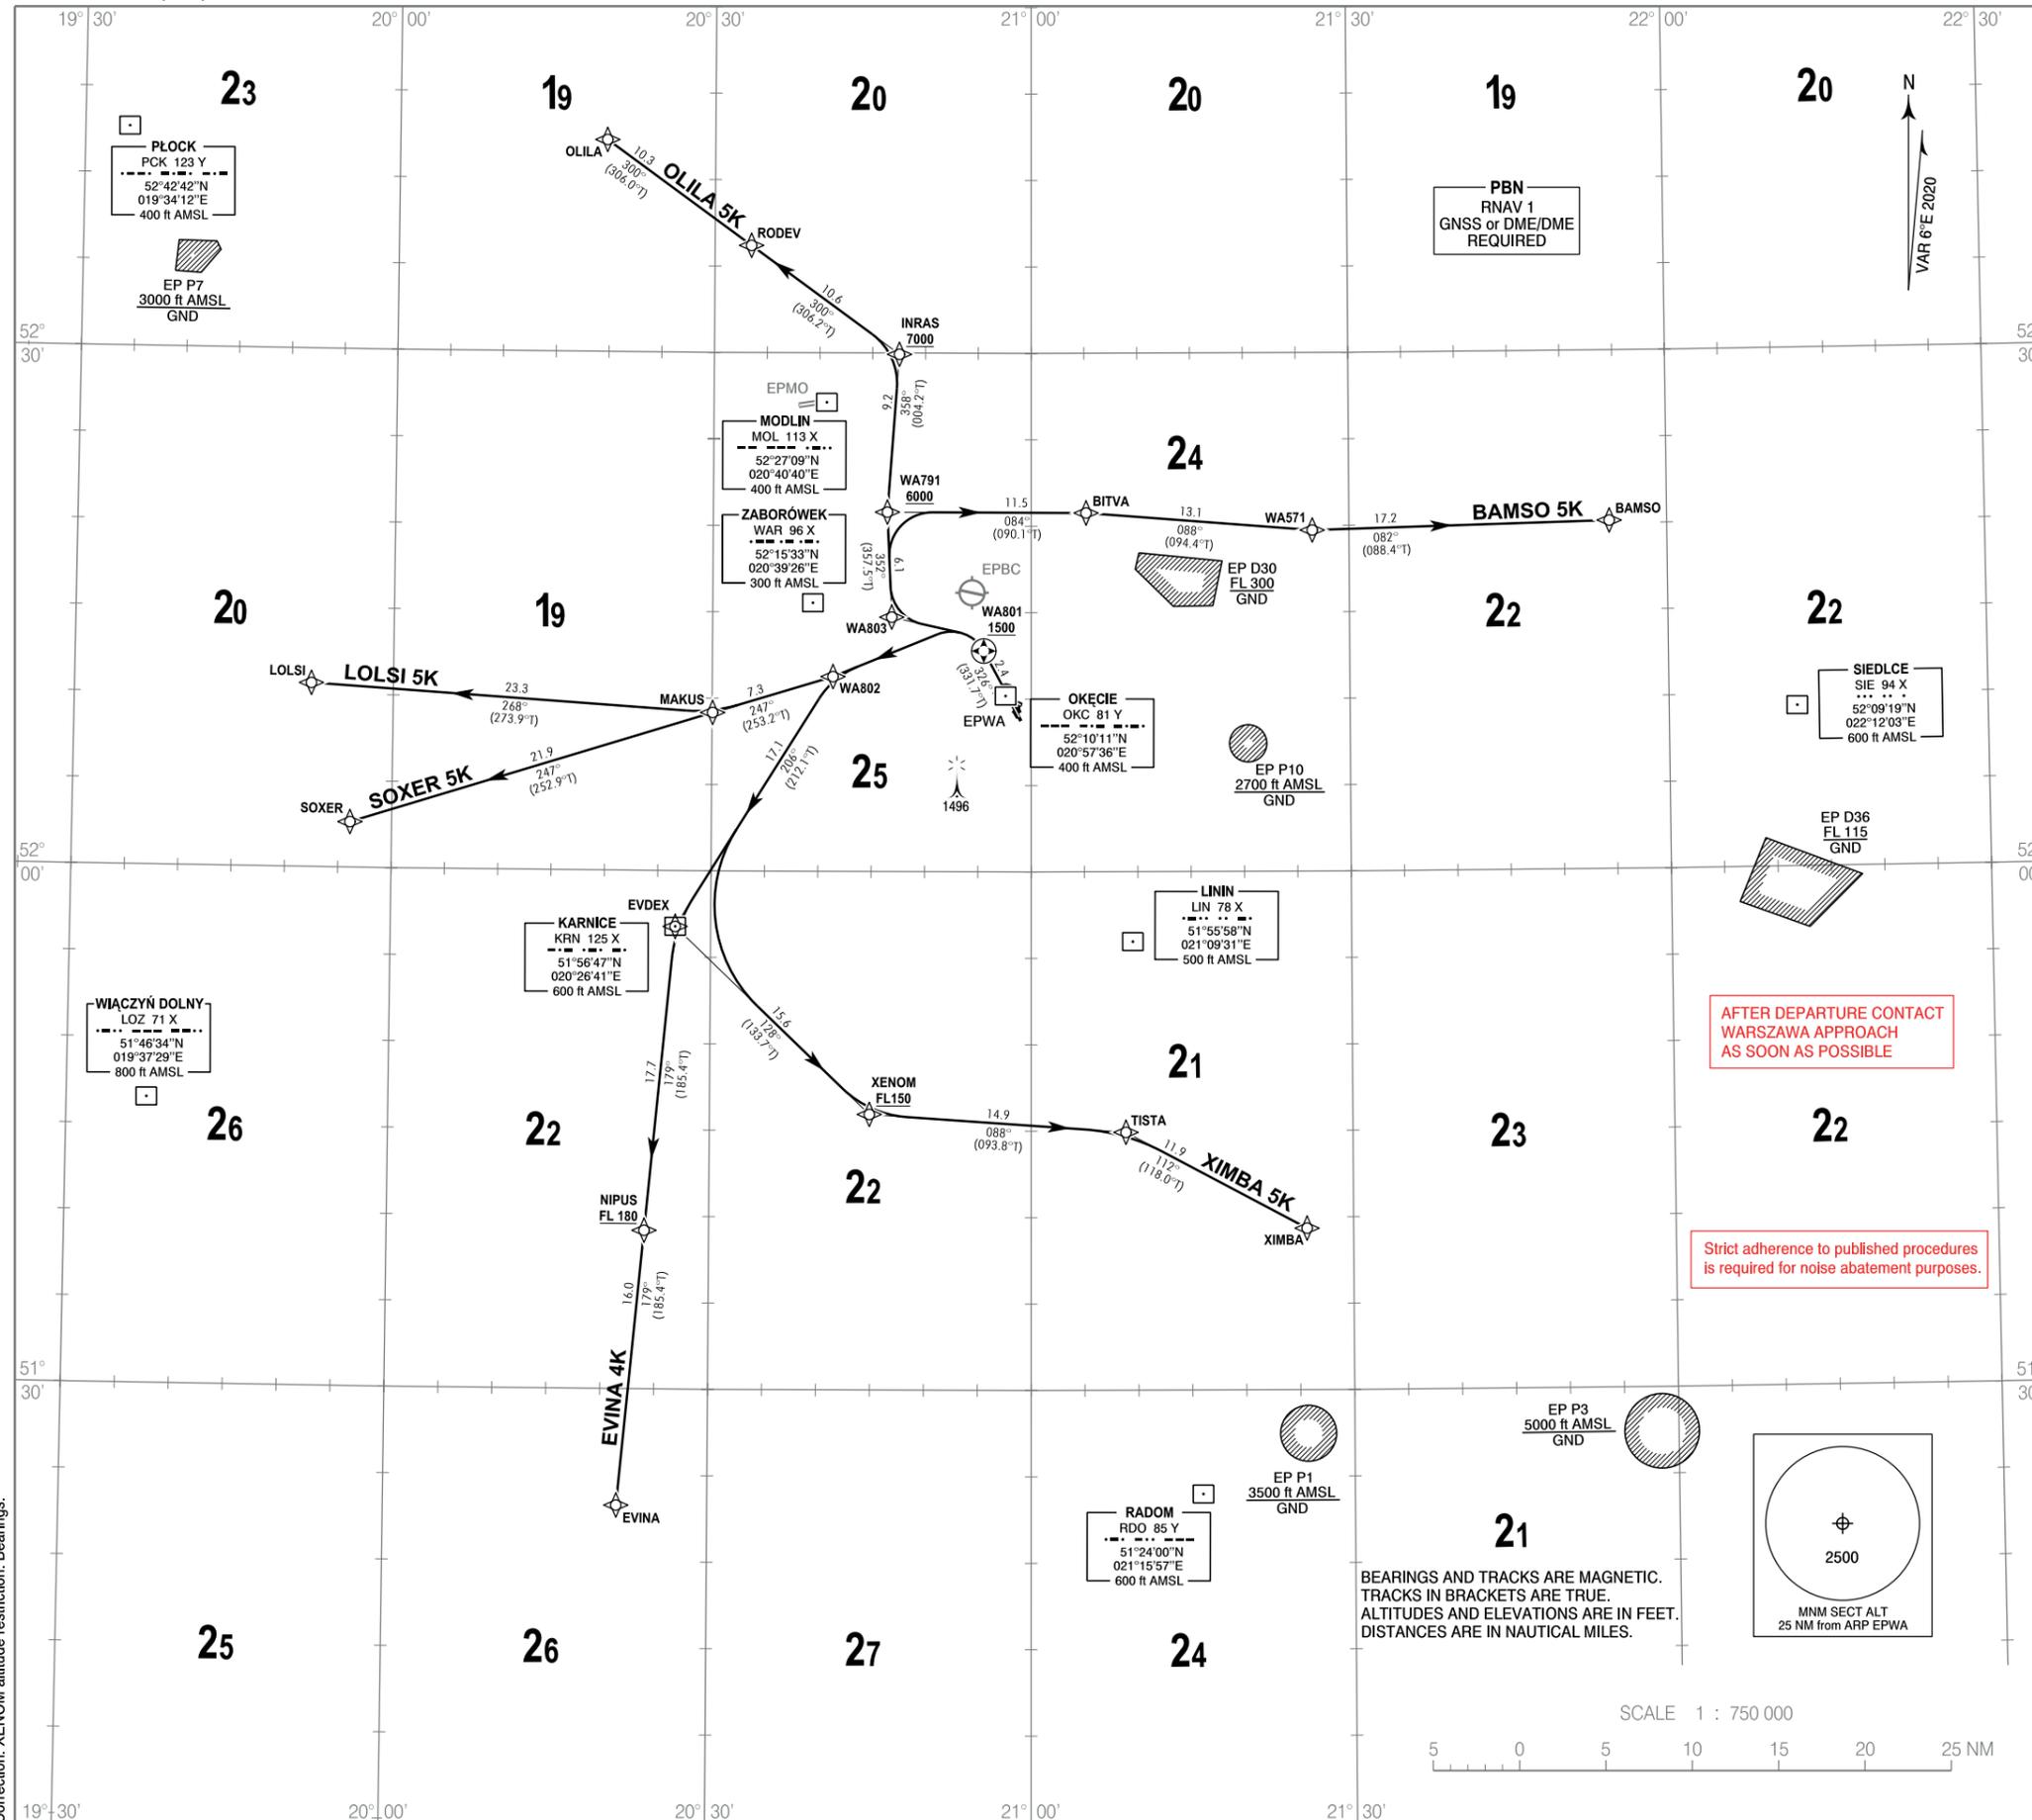

1. All aircraft which can not follow and utilize RNAV 1 procedures shall advise ATC before start up. Radar vectoring will be provided, usually along published procedures.
2. Expect direct routing/shortcuts by ATC whenever possible (especially during off-peak hours).
3. MAX IAS during initial turn as indicated in route description.
4. Initial SID climb: climb and maintain 6000 unless otherwise cleared by ATC.
5. Aircraft unable to achieve SID profile restrictions must request non-standard departure from ATC before start-up.

RADIO COMMUNICATION FAILURE PROCEDURE

- SET TRANSPONDER TO 7600
- a) Continue on assigned and acknowledged SID. After 3 minutes climb to FPL flight level.
 - b) If being vectored, continue on assigned heading for 3 minutes, then proceed direct to last SID WP climbing to FPL flight level.

AFTER DEPARTURE CONTACT
WARSAWA APPROACH
AS SOON AS POSSIBLE

Strict adherence to published procedures
is required for noise abatement purposes.

BEARINGS AND TRACKS ARE MAGNETIC.
TRACKS IN BRACKETS ARE TRUE.
ALTITUDES AND ELEVATIONS ARE IN FEET.
DISTANCES ARE IN NAUTICAL MILES.

SCALE 1 : 750 000



Correction: XENOM altitude restriction. Bearings.

**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

**WARSAW CHOPIN AIRPORT
RNAV RWY 33
BAMSO 5K EVINA 4K LOLSI 5K OLILA 5K SOXER 5K XIMBA 5K**

BAMSO 5K

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA801	Y	326 (331.7)	2.36	-	+1500 ft	-220	RNAV 1
002	DF	WA803	-	-	-	-	-	-250	RNAV 1
003	TF	WA791	-	352 (357.5)	6.09	-	+6000 ft	-250	RNAV 1
004	TF	BITVA	-	084 (090.1)	11.50	-	-	-	RNAV 1
005	TF	WA571	-	088 (094.4)	13.13	-	-	-	RNAV 1
006	TF	BAMSO	-	082 (088.4)	17.21	-	-	-	RNAV 1

EVINA 4K

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA801	Y	326 (331.7)	2.36	-	+1500 ft	-220	RNAV 1
002	DF	WA802	-	-	-	-	-	-	RNAV 1
003	TF	EVDEX	-	206 (212.1)	17.12	-	-	-	RNAV 1
004	TF	NIPUS	-	179 (185.4)	17.70	-	+FL180	-	RNAV 1
005	TF	EVINA	-	179 (185.4)	16.00	-	-	-	RNAV 1

LOLSI 5K

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA801	Y	326 (331.7)	2.36	-	+1500 ft	-220	RNAV 1
002	DF	WA802	-	-	-	-	-	-	RNAV 1
003	TF	MAKUS	-	247 (253.2)	7.27	-	-	-	RNAV 1
004	TF	LOLSI	-	268 (273.9)	23.30	-	-	-	RNAV 1

OLILA 5K

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA801	Y	326 (331.7)	2.36	-	+1500 ft	-220	RNAV 1
002	DF	WA803	-	-	-	-	-	-250	RNAV 1
003	TF	WA791	-	352 (357.5)	6.09	-	+6000 ft	-	RNAV 1
004	TF	INRAS	-	358 (004.2)	9.17	-	+7000 ft	-	RNAV 1
005	TF	RODEV	-	300 (306.2)	10.64	-	-	-	RNAV 1
006	TF	OLILA	-	300 (306.0)	10.35	-	-	-	RNAV 1

SOXER 5K

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA801	Y	326 (331.7)	2.36	-	+1500 ft	-220	RNAV 1
002	DF	WA802	-	-	-	-	-	-	RNAV 1
003	TF	MAKUS	-	247 (253.2)	7.27	-	-	-	RNAV 1
004	TF	SOXER	-	247 (252.9)	21.94	-	-	-	RNAV 1

XIMBA 5K

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	FLY - OVER	COURSE/TRACK °M (°T)	DISTANCE (NM)	TURN DIRECTION	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	WA801	Y	326 (331.7)	2.36	-	+1500 ft	-220	RNAV 1
002	DF	WA802	-	-	-	-	-	-	RNAV 1
003	TF	EVDEX	-	206 (212.1)	17.12	-	-	-	RNAV 1
004	TF	XENOM	-	128 (133.7)	15.65	-	+FL150	-	RNAV 1
005	TF	TISTA	-	088 (093.8)	14.91	-	-	-	RNAV 1
006	TF	XIMBA	-	112 (118.0)	11.87	-	-	-	RNAV 1

WAYPOINT IDENTIFIER	COORDINATES	
BAMSO	52 20 09.1 N	021 54 34.5 E
BITVA	52 20 46.0 N	021 05 11.3 E
EVDEX	51 56 46.5 N	020 26 40.6 E
EVINA	51 23 16.0 N	020 21 36.0 E
INRAS	52 29 56.3 N	020 47 31.8 E
LOLSI	52 10 38.9 N	019 52 17.0 E
MAKUS	52 09 10.0 N	020 30 03.0 E
NIPUS	51 39 10.8 N	020 23 59.8 E
OLILA	52 42 16.0 N	020 19 42.0 E
RODEV	52 36 12.2 N	020 33 27.2 E
SOXER	52 02 37.8 N	019 56 05.9 E
TISTA	51 44 56.0 N	021 08 50.5 E
WA571	52 19 44.0 N	021 26 32.0 E
WA791	52 20 48.4 N	020 46 26.0 E
WA801	52 12 47.1 N	020 55 32.5 E
WA802	52 11 16.8 N	020 41 21.3 E
WA803	52 14 43.9 N	020 46 52.2 E
XENOM	51 45 57.5 N	020 44 54.5 E
XIMBA	51 39 21.0 N	021 25 40.0 E