

STANDARD DEPARTURE CHART-INSTRUMENT

RJOW / IWAMI


RNAV TRANSITION

VIBEL TRANSITION

RNAV1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8°W

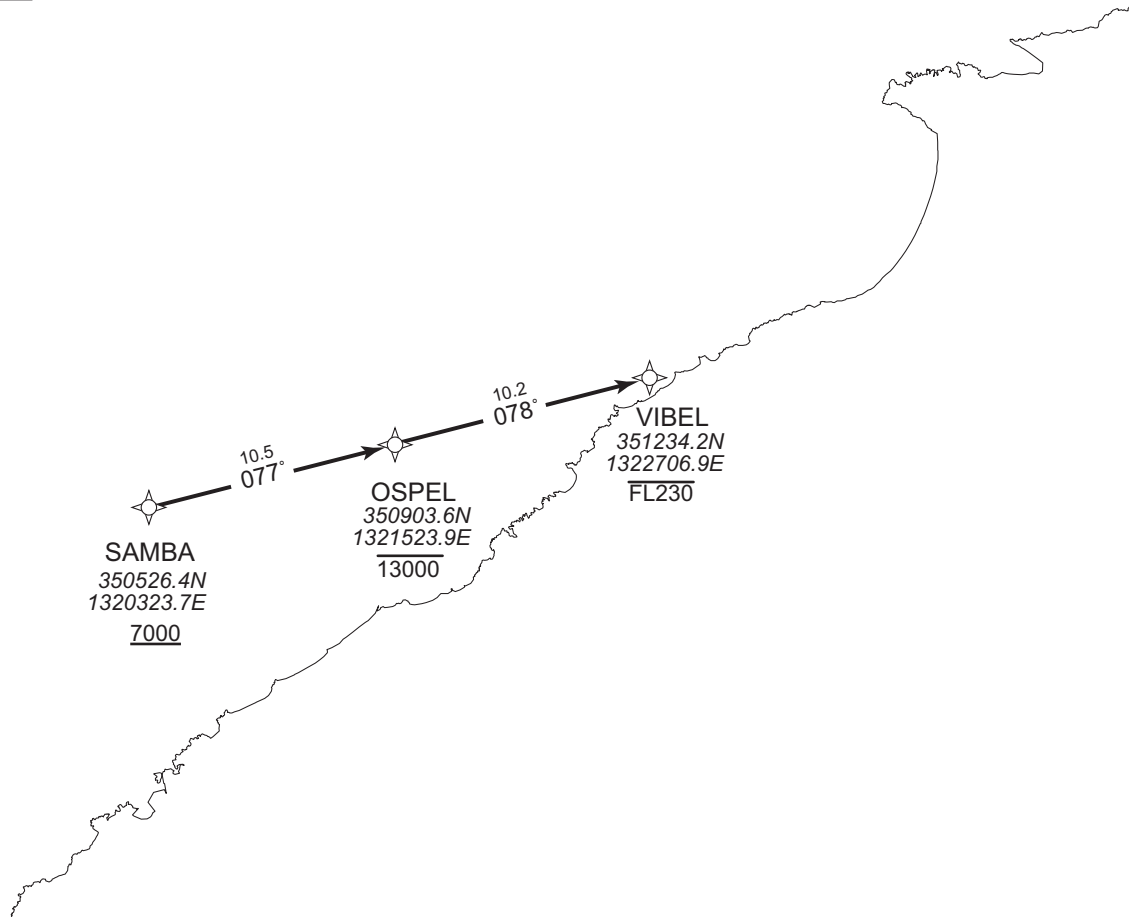

From SAMBA at or above 7000FT, to OSPEL at or below 13000FT, to VIBEL at or below FL230.

Critical DME	STD : SAMBA – VIBEL
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

CHANGE : FIX symbol(SAMBA).

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SAMBA	-	-	-7.8	-	-	+7000	-	-	RNAV1
002	TF	OSPEL	-	077 (069.7)	-7.8	10.5	-	-13000	-	-	RNAV1
003	TF	VIBEL	-	078 (069.8)	-7.8	10.2	-	-FL230	-	-	RNAV1