

STANDARD ARRIVAL CHART - INSTRUMENT

RJBB / KANSAI INTL


RNAV STAR RWY24L/24R

CANDY E ARRIVAL / NIXOV E ARRIVAL  
IGLEV E ARRIVAL / ATMUG E ARRIVAL

RNP1

Note GNSS required.

VAR 8° W

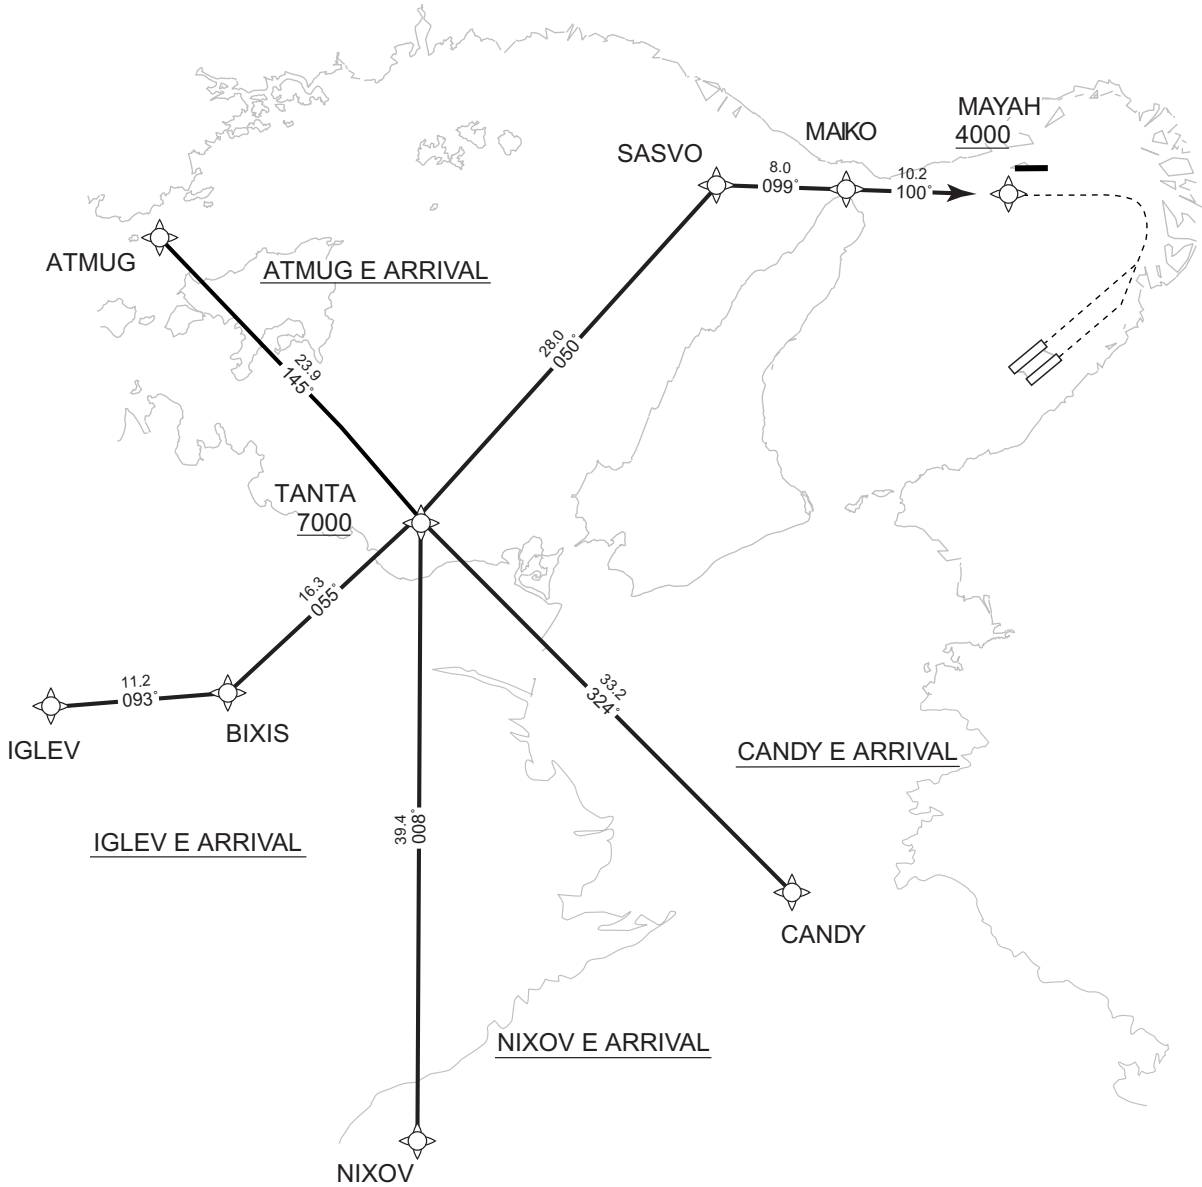

CHANGE : New PROC.

<p>1MIN(at or below FL140) 1.5MIN(above FL140) NOT TO SCALE</p> <p>ATMUG MHA 10000</p> <p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140)</p>	<p>1MIN(at or below FL140) 1.5MIN(above FL140) NOT TO SCALE</p> <p>IGLEV MHA 11000</p> <p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140)</p>	<p>1MIN(at or below FL140) 1.5MIN(above FL140) NOT TO SCALE</p> <p>NIXOV MHA 9000</p> <p>NOT TO SCALE</p> <p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140)</p>	<p>MAX 230KIAS(at or below FL140) MAX 240KIAS(above FL140)</p> <p>CANDY MHA 9000</p> <p>NOT TO SCALE</p> <p>1MIN(at or below FL140) 1.5MIN(above FL140)</p>
---	---	--	---

STANDARD ARRIVAL CHART - INSTRUMENT

RJBB / KANSAI INTL

RNAV STAR RWY24L/24R

CANDY E ARRIVAL

From CANDY, to TANTA at or above 7000FT, to SASVO, to MAIKO, to MAYAH at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	CANDY	—	—	-8.1	—	—	—	—	—	RNP1
002	TF	TANTA	—	324 (315.4)	-8.1	33.2	—	+7000	—	—	RNP1
003	TF	SASVO	—	050 (041.8)	-8.1	28.0	—	—	—	—	RNP1
004	TF	MAIKO	—	099 (091.3)	-8.1	8.0	—	—	—	—	RNP1
005	TF	MAYAH	—	100 (091.4)	-8.1	10.2	—	+4000	—	—	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	CANDY	322 (314.0)	-8.1	1.0(-14000) 1.5(+14001)	L	9000	—	-230(-14000) -240(+14001)	RNP1

NIXOV E ARRIVAL

From NIXOV, to TANTA at or above 7000FT, to SASVO, to MAIKO, to MAYAH at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	NIXOV	—	—	-8.1	—	—	—	—	—	RNP1
002	TF	TANTA	—	008 (359.7)	-8.1	39.4	—	+7000	—	—	RNP1
003	TF	SASVO	—	050 (041.8)	-8.1	28.0	—	—	—	—	RNP1
004	TF	MAIKO	—	099 (091.3)	-8.1	8.0	—	—	—	—	RNP1
005	TF	MAYAH	—	100 (091.4)	-8.1	10.2	—	+4000	—	—	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	NIXOV	064 (055.4)	-8.1	1.0(-14000) 1.5(+14001)	L	9000	—	-230(-14000) -240(+14001)	RNP1

CHANGE : New PROC.

STANDARD ARRIVAL CHART - INSTRUMENT

RJBB / KANSAI INTL

RNAV STAR RWY24L/24R

IGLEV E ARRIVAL

From IGLEV, to BIXIS, to TANTA at or above 7000FT, to SASVO, to MAIKO, to MAYAH at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	IGLEV	-	-	-8.1	-	-	-	-	-	RNP1
002	TF	BIXIS	-	093 (085.3)	-8.1	11.2	-	-	-	-	RNP1
003	TF	TANTA	-	055 (046.9)	-8.1	16.3	-	+7000	-	-	RNP1
004	TF	SASVO	-	050 (041.8)	-8.1	28.0	-	-	-	-	RNP1
005	TF	MAIKO	-	099 (091.3)	-8.1	8.0	-	-	-	-	RNP1
006	TF	MAYAH	-	100 (091.4)	-8.1	10.2	-	+4000	-	-	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	IGLEV	093 (085.2)	-8.1	1.0(-14000) 1.5(+14001)	L	11000	-	-230(-14000) -240(+14001)	RNP1

ATMUG E ARRIVAL

From ATMUG, to TANTA at or above 7000FT, to SASVO, to MAIKO, to MAYAH at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ATMUG	-	-	-8.1	-	-	-	-	-	RNP1
002	TF	TANTA	-	145 (136.7)	-8.1	23.9	-	+7000	-	-	RNP1
003	TF	SASVO	-	050 (041.8)	-8.1	28.0	-	-	-	-	RNP1
004	TF	MAIKO	-	099 (091.3)	-8.1	8.0	-	-	-	-	RNP1
005	TF	MAYAH	-	100 (091.4)	-8.1	10.2	-	+4000	-	-	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	ATMUG	181 (172.5)	-8.1	1.0(-14000) 1.5(+14001)	R	10000	-	-230(-14000) -240(+14001)	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
CANDY	335229.8N / 1345541.8E	TANTA	341604.9N / 1342729.2E
NIXOV	333644.5N / 1342743.1E	SASVO	343651.4N / 1345007.5E
IGLEV	340405.2N / 1335940.5E	MAIKO	343639.7N / 1345949.1E
BIXIS	340459.0N / 1341305.7E	MAYAH	343623.7N / 1351211.0E
ATMUG	343330.0N / 1340737.4E		

CHANGE : New PROC.