

STANDARD ARRIVAL CHART - INSTRUMENT

VAR 5.2° W

D-ATIS 127.65
APP 119.45 (124.4)
TWR 118.0 (130.0)

ZSWX WUXI/Shuofang
RWY 21


BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.

TL by ATC
TH (1800)




NOT TO SCALE

Initial approach MAX IAS 380km/h
Holding MAX IAS 380km/h

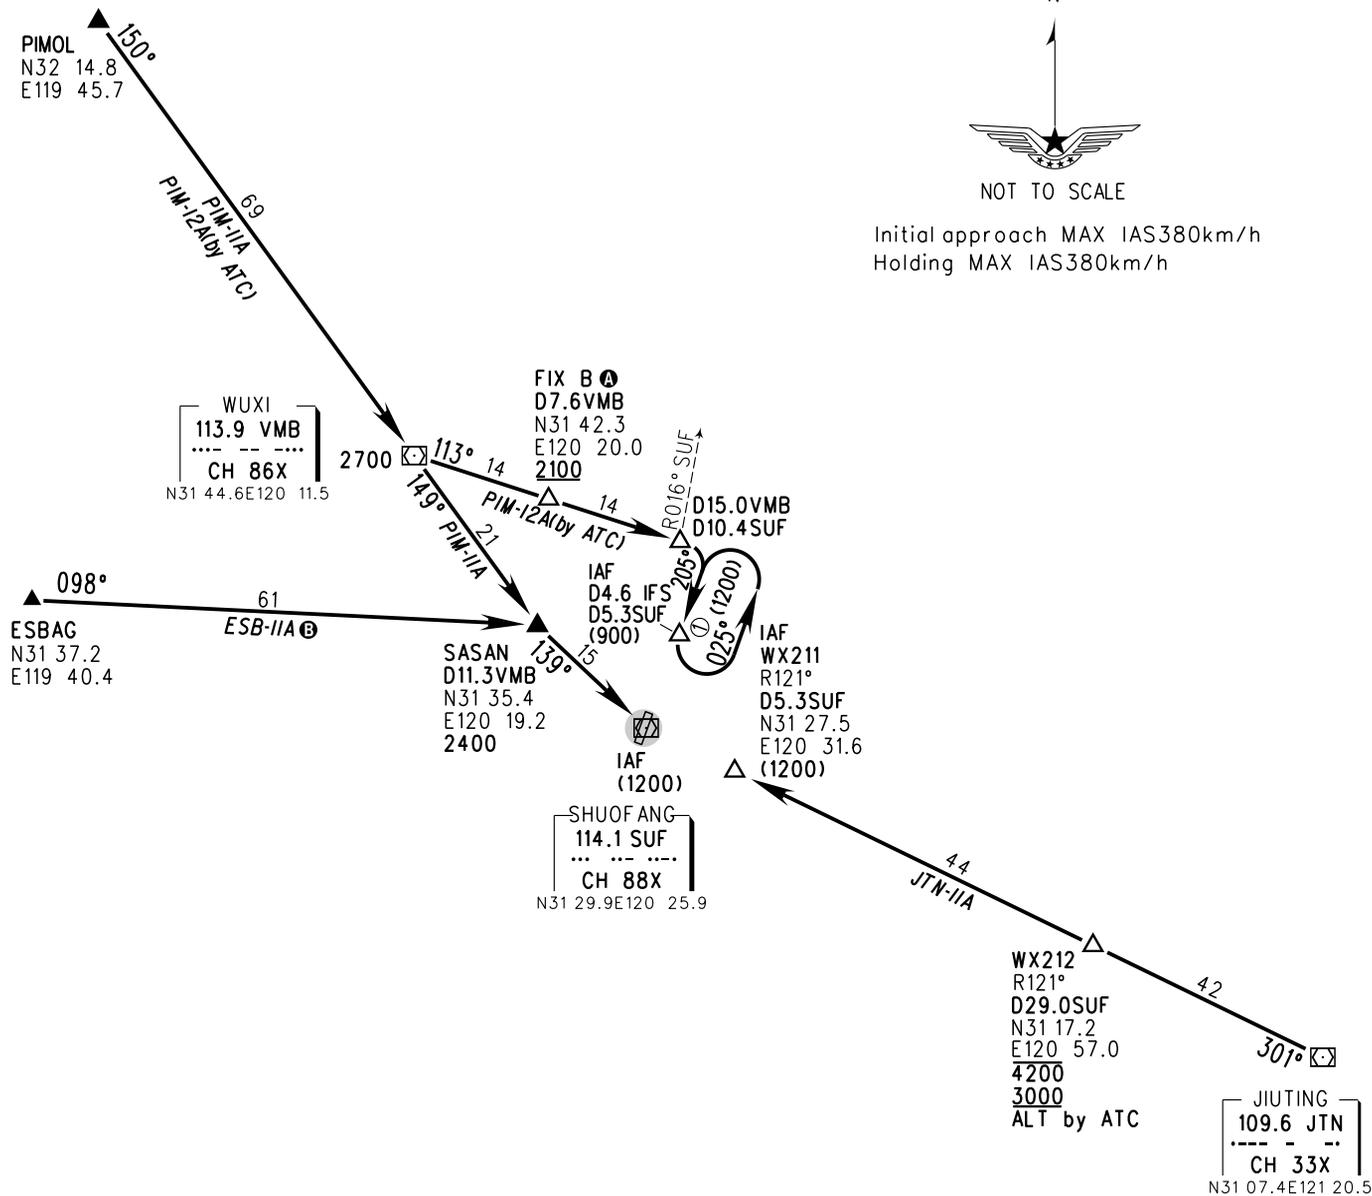

- Ⓐ If altitude of Fix B is 2100 or above, aircraft shall join in holding procedure, and descend altitude to approach.
- Ⓑ ESBAG-SASAN navigate with radar vectoring.



MSA 46km

Changes: D-ATIS