

LOC I-BNE
110.7

APP CRS
337°

Rwy Idg
TDZE **161**
Apt Elev **168**

ILS or LOC RWY 34

RICHMOND INTL (RIC)


DME required for LOC only.

▼ For inop ALS, increase S-ILS 34 Cat E visibility to RVR 4000 and S-LOC 34 Cat E visibility to 1½ SM. DME from RIC VORTAC. DME use requires simultaneous reception of I-BNE and RIC DME.

ALSIF-2

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 on RIC VORTAC R-018 to EPICS INT/RIC 17.3 DME and hold.

ATIS 119.15 263.025	POTOMAC APP CON 126.4 282.375 (001°-185°) 126.75 307.2 (186°-360°)	RICHMOND TOWER 121.1 257.8	GND CON 121.9 348.6	CLNC DEL 127.55 348.6
-------------------------------	--	--------------------------------------	-------------------------------	---------------------------------

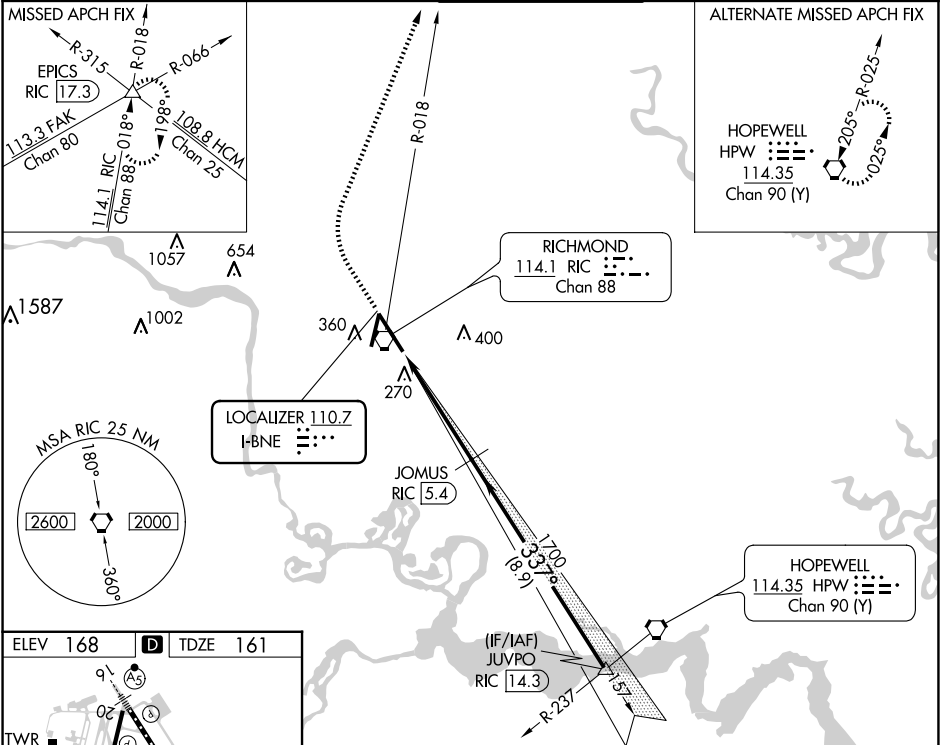

ELEV 168 D TDZE 161

TWR 343

TDZ/CL Rwy 34
HIRL Rwys 2-20 and 16-34
REIL Rwy 20
FAF to MAP 4.7 NM

Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

800
2000
EPICS
RIC R-018
RIC 1.9

JOMUS RIC 5.4
JUVPO RIC 14.3
1700
337°
1700
1700
VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 79).
GS 3.00° TCH 54

1.2 NM
3.5 NM
8.9 NM

CATEGORY	A	B	C	D	E
S-ILS 34	361/18 200 (200-½)				
S-LOC 34	620/24	459 (500-½)	620/45 459 (500-¾)		
CIRCLING	660-1	492 (500-1)	700-1½ 532 (600-1½)	720-2 552 (600-2)	740-2 572 (600-2)