

STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

SOSHU ONE DEPARTURE

RNAV1

Note 1 ) DME/DME/IRU or GNSS required.

※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.

2 ) RADAR service required.

Critical DME

RWY01L/01R  
CHE : 2.0NM FM DER – 2.0NM to CC01T


DME GAP

RWY01L/01R : DER – 2.0NM FM DER  
3.0NM to CHE – CHE  
RWY19L/19R : DER – CHE

Inappropriate Navaids

See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

VAR 9°W

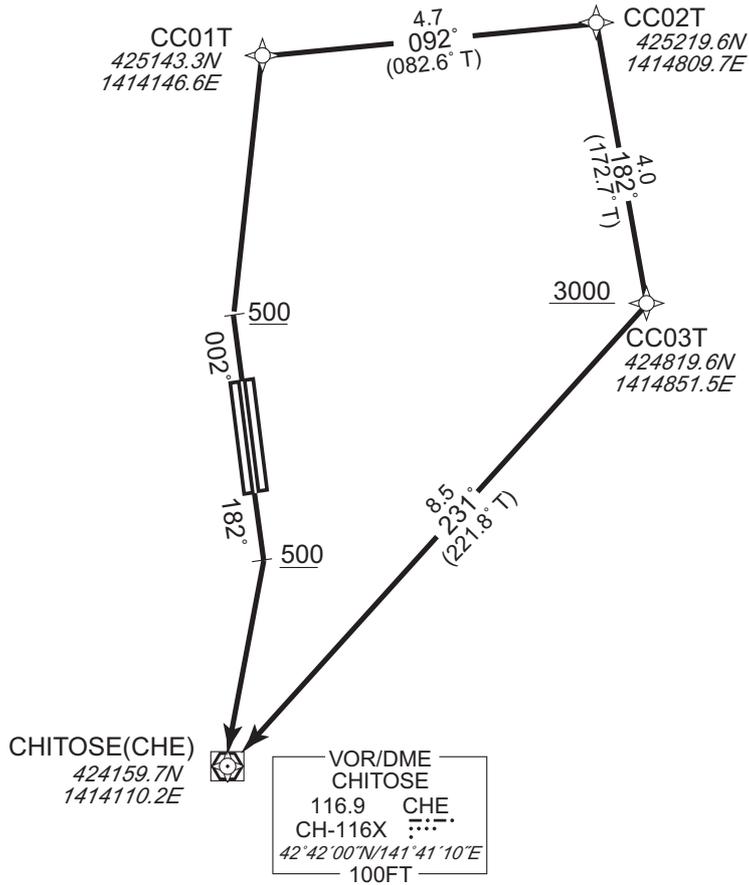

CHANGE : Description of VAR and PROC name.

RWY01L/01R : Climb on HDG002° at or above 500FT, direct to CC01T, to CC02T, to CC03T at or above 3000FT, to CHE.

RWY19R/19L : Climb on HDG182° at or above 500FT, direct to CHE.

Note : 5.0% climb gradient required up to 500FT.

STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

SOSHU ONE DEPARTURE

RWY01L/01R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course [M°(T°)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	002 (352.6)	-9.1	—	—	+500	—	—	RNAV1
002	DF	CC01T	—	—	-9.1	—	—	—	—	—	RNAV1
003	TF	CC02T	—	092 (082.6)	-9.1	4.7	—	—	—	—	RNAV1
004	TF	CC03T	—	182 (172.7)	-9.1	4.0	—	+3000	—	—	RNAV1
005	TF	CHE	—	231 (221.8)	-9.1	8.5	—	—	—	—	RNAV1

RWY19R/19L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course [M°(T°)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	182 (172.6)	-9.1	—	—	+500	—	—	RNAV1
002	DF	CHE	—	—	-9.1	—	—	—	—	—	RNAV1


CHANGE : Waypoint identifier(CHE).

STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

REZOT TWO DEPARTURE		RNAV1
Note 1 ) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2 ) RADAR service required.		RWY01L/01R CHE : 2.0NM FM DER – 2.0NM to CC01T MKE : CHE – 18.0NM to REZOT ZYT : CHE – 18.0NM to REZOT RWY19L/19R MKE : 3.0NM to CC06T – 16.0NM to REZOT 7.0NM to REZOT – REZOT ZYT : 3.0NM to CC06T – 1.0NM to CC06T 7.0NM to REZOT – REZOT RWY01L/01R, RWY19L/19R SPE : 4.0NM to TEKKO – TEKKO
DME GAP	RWY01L/01R : DER – 2.0NM FM DER, 3.0NM to CHE – CHE RWY19L/19R : DER – 3.0NM to CC06T	
Critical DME		Inappropriate Nav aids
		See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

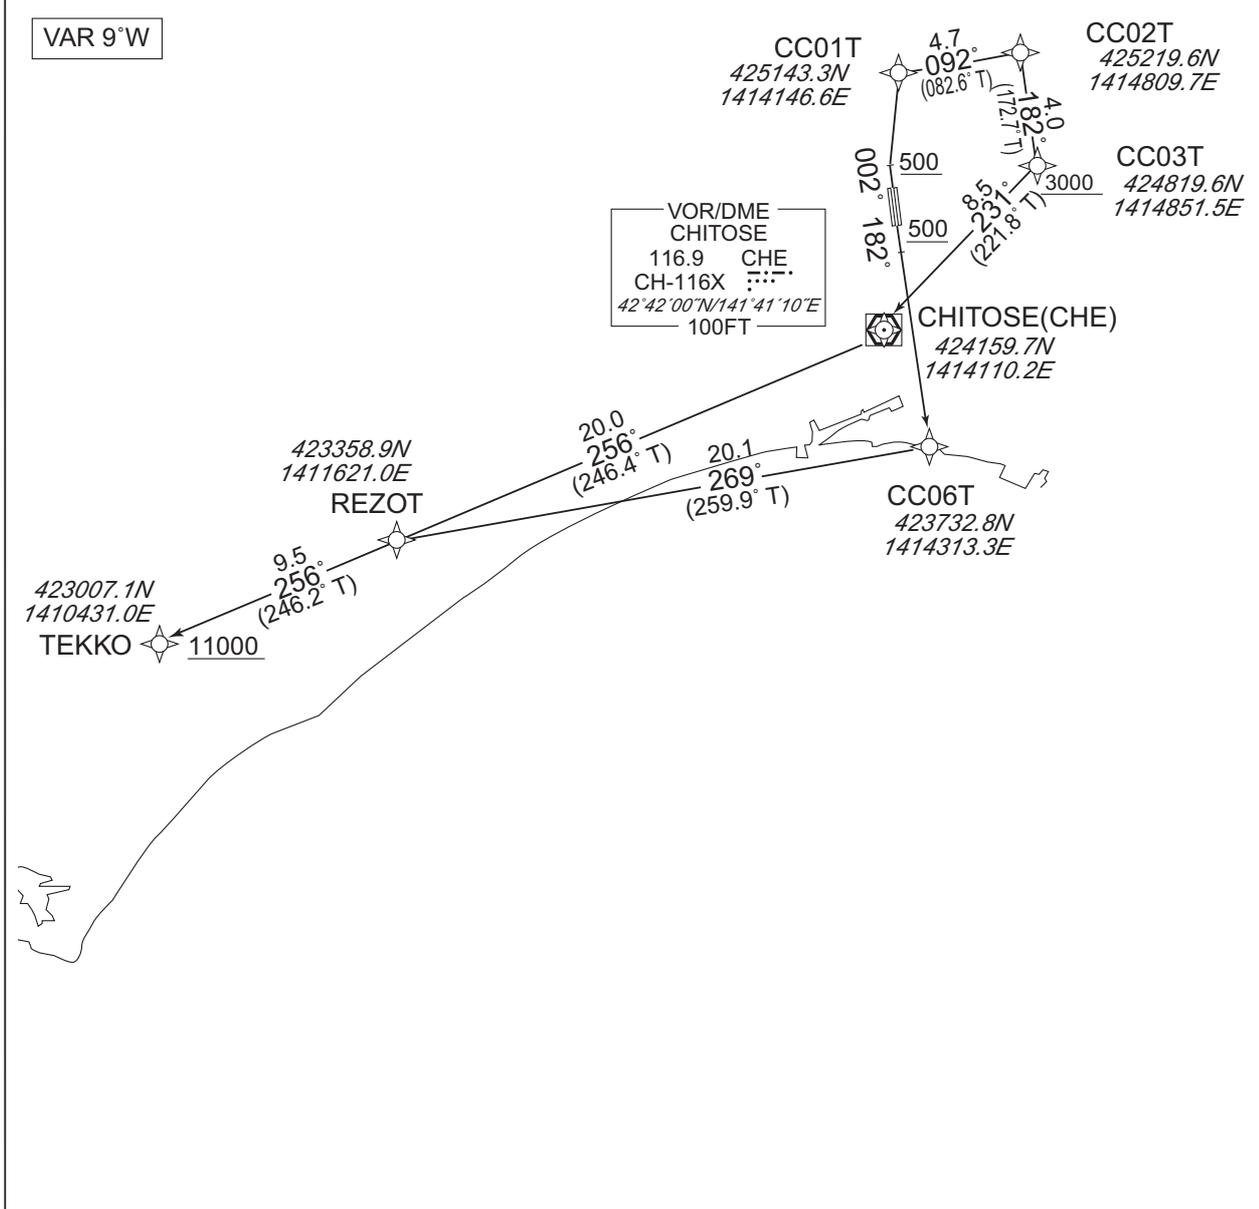

CHANGE : Description of VAR and PROC name.

RWY01L/01R : Climb on HDG002° at or above 500FT, direct to CC01T, to CC02T, to CC03T at or above 3000FT, to CHE, to REZOT, to TEKKO at or above 11000FT.

RWY19R/19L : Climb on HDG182° at or above 500FT, direct to CC06T, to REZOT, to TEKKO at or above 11000FT.

Note : 5.0% climb gradient required up to 500FT.

STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

REZOT TWO DEPARTURE

RWY01L/01R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course [M°(T°)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	002 (352.6)	-9.3	—	—	+500	—	—	RNAV1
002	DF	CC01T	—	—	-9.3	—	—	—	—	—	RNAV1
003	TF	CC02T	—	092 (082.6)	-9.3	4.7	—	—	—	—	RNAV1
004	TF	CC03T	—	182 (172.7)	-9.3	4.0	—	+3000	—	—	RNAV1
005	TF	CHE	—	231 (221.8)	-9.3	8.5	—	—	—	—	RNAV1
006	TF	REZOT	—	256 (246.4)	-9.3	20.0	—	—	—	—	RNAV1
007	TF	TEKKO	—	256 (246.2)	-9.3	9.5	—	+11000	—	—	RNAV1

RWY19R/19L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course [M°(T°)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	182 (172.6)	-9.3	—	—	+500	—	—	RNAV1
002	DF	CC06T	—	—	-9.3	—	—	—	—	—	RNAV1
003	TF	REZOT	—	269 (259.9)	-9.3	20.1	—	—	—	—	RNAV1
004	TF	TEKKO	—	256 (246.2)	-9.3	9.5	—	+11000	—	—	RNAV1

CHANGE : Waypoint identifier(CHE).

STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

JUGGLAR ONE DEPARTURE

RNAV1

Note 1 ) DME/DME/IRU or GNSS required.

※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.

2 ) RADAR service required.

RWY01L/01R

CHE : 2.0NM FM DER – 2.0NM to CC01T

3.0NM to CC04T – CC04T

MKE : 4.0NM to CC05T – 23.0NM to TOBBY

12.0NM to TOBBY – 4.0NM to TOBBY

SPE : 18.0NM to TOBBY – 4.0NM to TOBBY

DME GAP

RWY01L/01R : DER – 2.0NM FM DER  
CC04T – 4.0NM to CC05T  
4.0NM to TOBBY – TOBBY  
RWY19L/19R : DER – 3.0NM to CC06T  
3.0NM to TOBBY – TOBBY

Critical DME

RWY19L/19R

MKE : 3.0NM to CC06T – 3.0NM to TOBBY


ZYT : 3.0NM to CC06T – 1.0NM to CC06T

SPE : 17.0NM to TOBBY – 3.0NM to TOBBY

Inappropriate Nav aids

See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 9°W

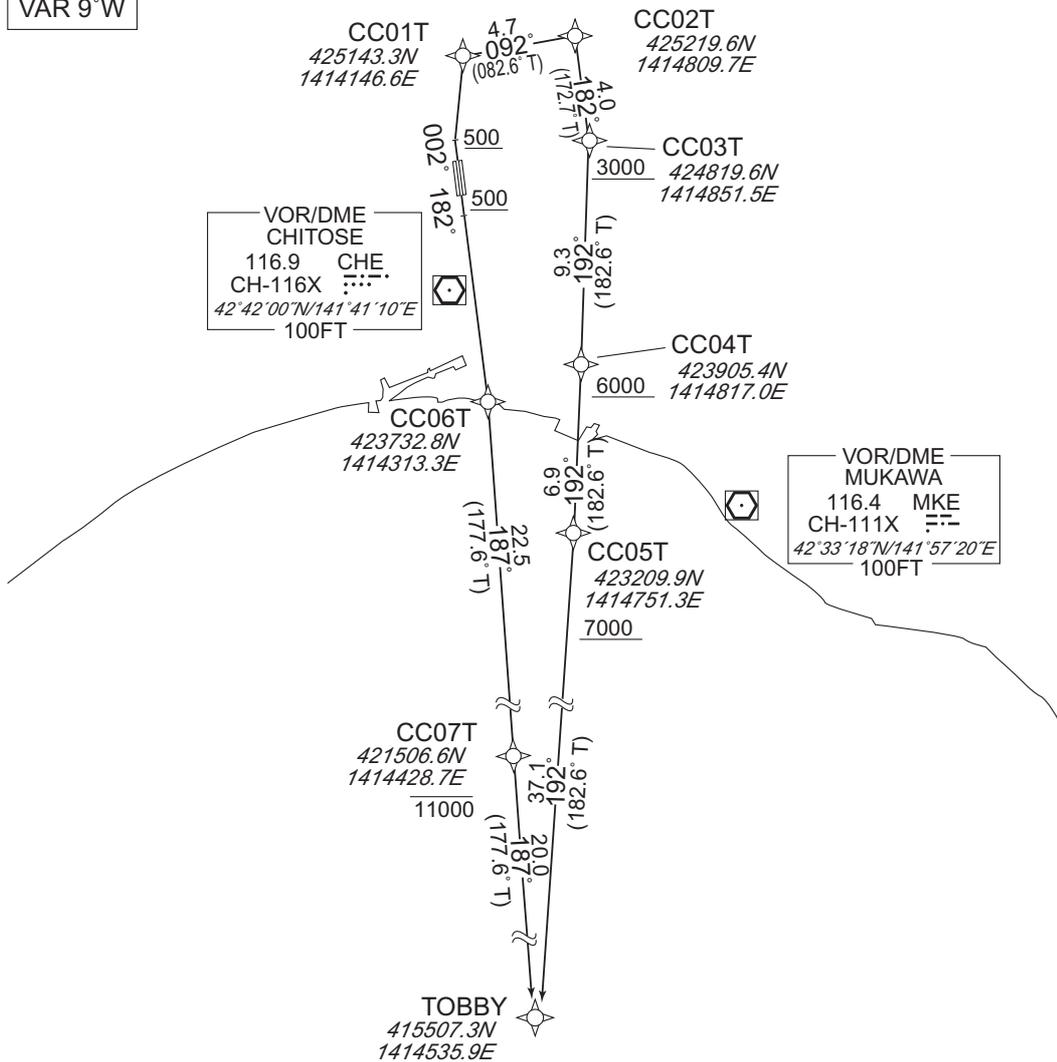

CHANGE : Description of VAR and PROC name.

RWY01L/01R : Climb on HDG002° at or above 500FT, direct to CC01T, to CC02T, to CC03T at or above 3000FT, to CC04T at or above 6000FT, to CC05T at or above 7000FT, to TOBBY.

RWY19R/19L : Climb on HDG182° at or above 500FT, direct to CC06T, to CC07T at or below 11000FT, to TOBBY.

Note : 5.0% climb gradient required up to 500FT.

STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

JUGGLAR ONE DEPARTURE

RWY01L/01R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course [M°(T°)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	002 (352.6)	-9.1	—	—	+500	—	—	RNAV1
002	DF	CC01T	—	—	-9.1	—	—	—	—	—	RNAV1
003	TF	CC02T	—	092 (082.6)	-9.1	4.7	—	—	—	—	RNAV1
004	TF	CC03T	—	182 (172.7)	-9.1	4.0	—	+3000	—	—	RNAV1
005	TF	CC04T	—	192 (182.6)	-9.1	9.3	—	+6000	—	—	RNAV1
006	TF	CC05T	—	192 (182.6)	-9.1	6.9	—	+7000	—	—	RNAV1
007	TF	TOBBY	—	192 (182.6)	-9.1	37.1	—	—	—	—	RNAV1

RWY19R/19L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course [M°(T°)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	182 (172.6)	-9.1	—	—	+500	—	—	RNAV1
002	DF	CC06T	—	—	-9.1	—	—	—	—	—	RNAV1
003	TF	CC07T	—	187 (177.6)	-9.1	22.5	—	-11000	—	—	RNAV1
004	TF	TOBBY	—	187 (177.6)	-9.1	20.0	—	—	—	—	RNAV1


STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

PATRUSH ONE DEPARTURE		RNAV 1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.		RWY01L/01R SPE : 7.0NM to KURIS – KURIS  RWY19L/19R SPE : 1.0NM to CC02H – CC02H 7.0NM to KURIS – KURIS CHE : 1.0NM to CC02H – 4.0NM to CC03H
DME GAP	RWY01L/01R : DER – 2.0NM FM DER RWY19L/19R : DER – 1.0NM to CC02H	
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

VAR 9°W

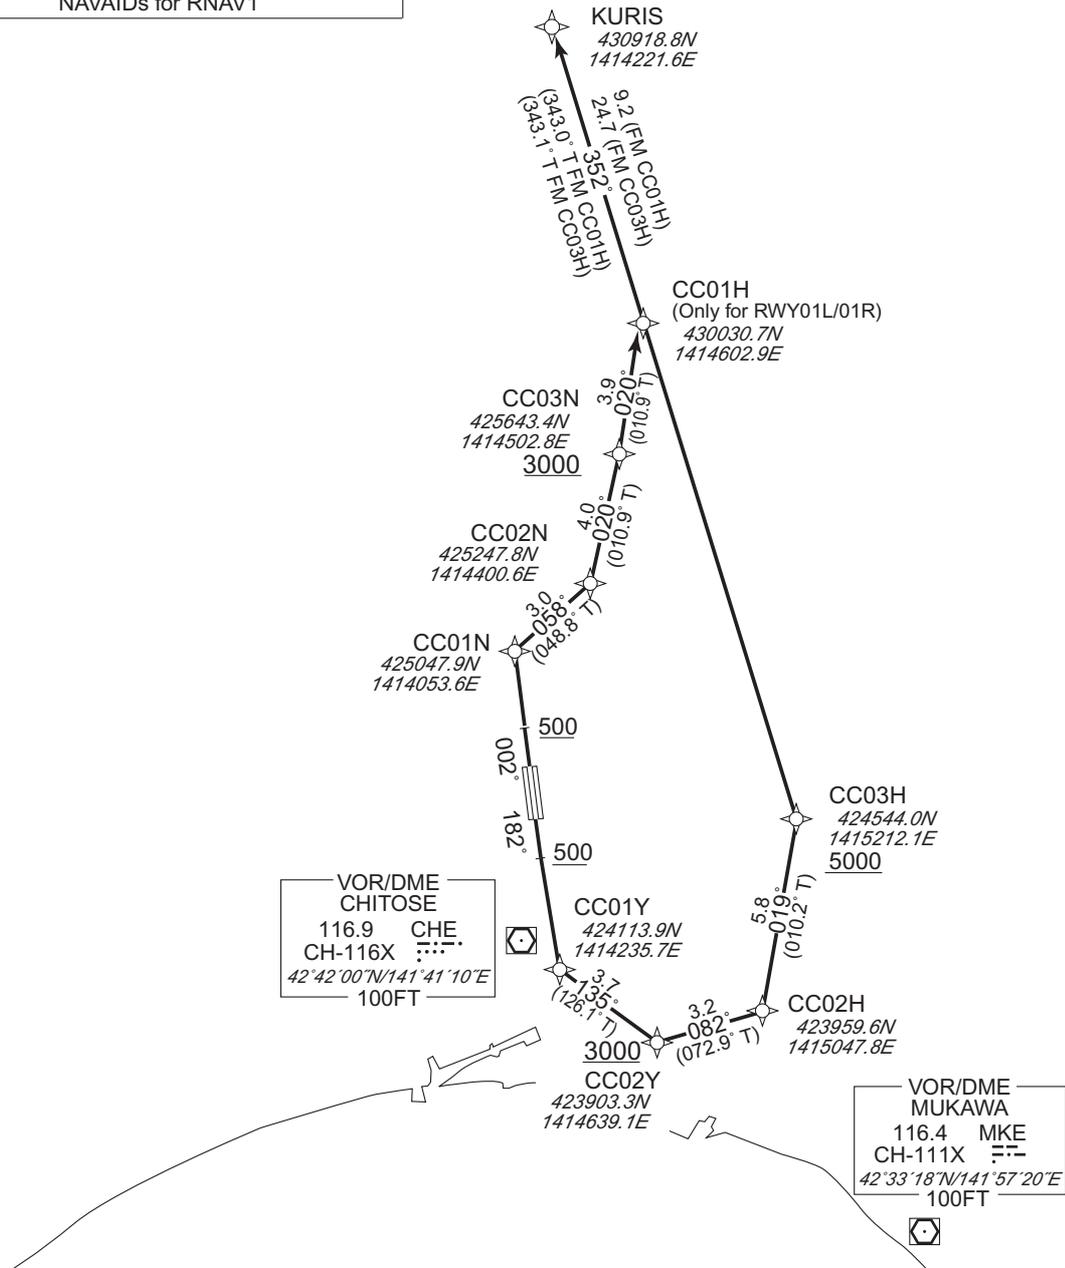

CHANGE : Description of VAR and PROC name.

RWY01L/01R : Climb on HDG 002° at or above 500FT, direct to CC01N, to CC02N, to CC03N at or above 3000FT, to CC01H, to KURIS.  
 RWY19L/19L : Climb on HDG 182° at or above 500FT, direct to CC01Y, to CC02Y at or above 3000FT, to CC02H, to CC03H at or above 5000FT, to KURIS.  
 Note : 5.0% climb gradient required up to 500FT.

STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

PATRUSH ONE DEPARTURE

RWY01L/01R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course [M°(T°)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	002 (352.6)	-9.1	—	—	+500	—	—	RNAV1
002	DF	CC01N	—	—	-9.1	—	—	—	—	—	RNAV1
003	TF	CC02N	—	058 (048.8)	-9.1	3.0	—	—	—	—	RNAV1
004	TF	CC03N	—	020 (010.9)	-9.1	4.0	—	+3000	—	—	RNAV1
005	TF	CC01H	—	020 (010.9)	-9.1	3.9	—	—	—	—	RNAV1
006	TF	KURIS	—	352 (343.0)	-9.1	9.2	—	—	—	—	RNAV1

RWY19R/19L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course [M°(T°)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	182 (172.6)	-9.1	—	—	+500	—	—	RNAV1
002	DF	CC01Y	—	—	-9.1	—	—	—	—	—	RNAV1
003	TF	CC02Y	—	135 (126.1)	-9.1	3.7	—	+3000	—	—	RNAV1
004	TF	CC02H	—	082 (072.9)	-9.1	3.2	—	—	—	—	RNAV1
005	TF	CC03H	—	019 (010.2)	-9.1	5.8	—	+5000	—	—	RNAV1
006	TF	KURIS	—	352 (343.1)	-9.1	24.7	—	—	—	—	RNAV1


STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

YOSAN ONE DEPARTURE		RNAV1	
Note 1 ) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2 ) RADAR service required.		RWY19L/19R MKE : 3.0NM to CC06T – 6.0NM to YASKN 3.0NM to YASKN – 1.0NM to YASKN YASKN – 3.0NM to YOSAN 5.0NM to TOBBY – 3.0NM to TOBBY ZYT : 3.0NM to CC06T – 1.0NM to CC06T YASKN – 5.0NM to MISTA SPE : 5.0NM to TOBBY – 3.0NM to TOBBY HWE : 19.0NM to TOBBY – 17.0NM to TOBBY 4.0NM to TOBBY – TOBBY	
DME GAP	RWY19L/19R : DER – 3.0NM to CC06T		Critical DME
Inappropriate NavAids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1		

VAR 9°W

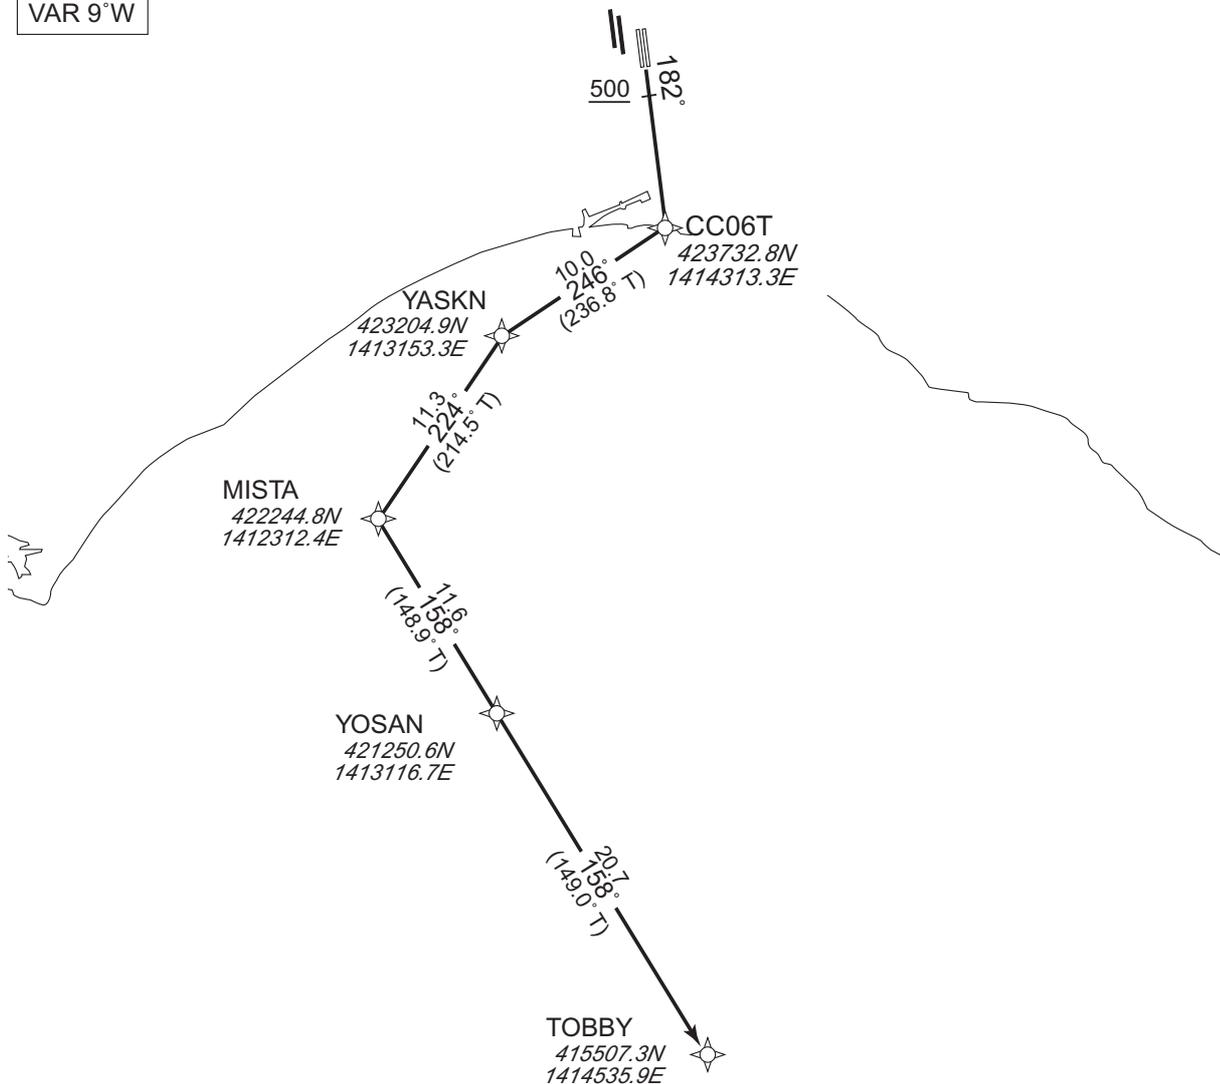

CHANGE : Description of VAR and PROC name.

RWY19R/19L : Climb on HDG182° at or above 500FT, direct to CC06T, to YASKN, to MISTA, to YOSAN, to TOBBY.

Note : 5.0% climb gradient required up to 500FT.

STANDARD DEPARTURE CHART -INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

YOSAN ONE DEPARTURE

RWY19R/19L


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course [M°(T°)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	182 (172.6)	-9.3	-	-	+500	-	-	RNAV1
002	DF	CC06T	-	-	-9.3	-	-	-	-	-	RNAV1
003	TF	YASKN	-	246 (236.8)	-9.3	10.0	-	-	-	-	RNAV1
004	TF	MISTA	-	224 (214.5)	-9.3	11.3	-	-	-	-	RNAV1
005	TF	YOSAN	-	158 (148.9)	-9.3	11.6	-	-	-	-	RNAV1
006	TF	TOBBY	-	158 (149.0)	-9.3	20.7	-	-	-	-	RNAV1

STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

DALBI ONE DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※ The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.		RWAY01L/01R CHE : 2.0NM FM DER – 2.0NM to CC01T 19.0NM to KUGIE - 18.0NM to KUGIE ZYT : 16.0NM to KUGIE - 13.0NM to KUGIE MKE : 16.0NM to KUGIE - 12.0NM to KUGIE  RWAY19L/19R MKE : 6.0NM to NEJIE - 2.0NM to NEJIE NEJIE - 26.8NM to POWAN
DME GAP	Critical DME RWAY01L/01R : DER – 2.0NM FM DER 18.0NM to KUGIE - 15.0NM to KUGIE  RWAY19L/19R : DER – 6.0NM to NEJIE	
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAV AIDs for RNAV1	

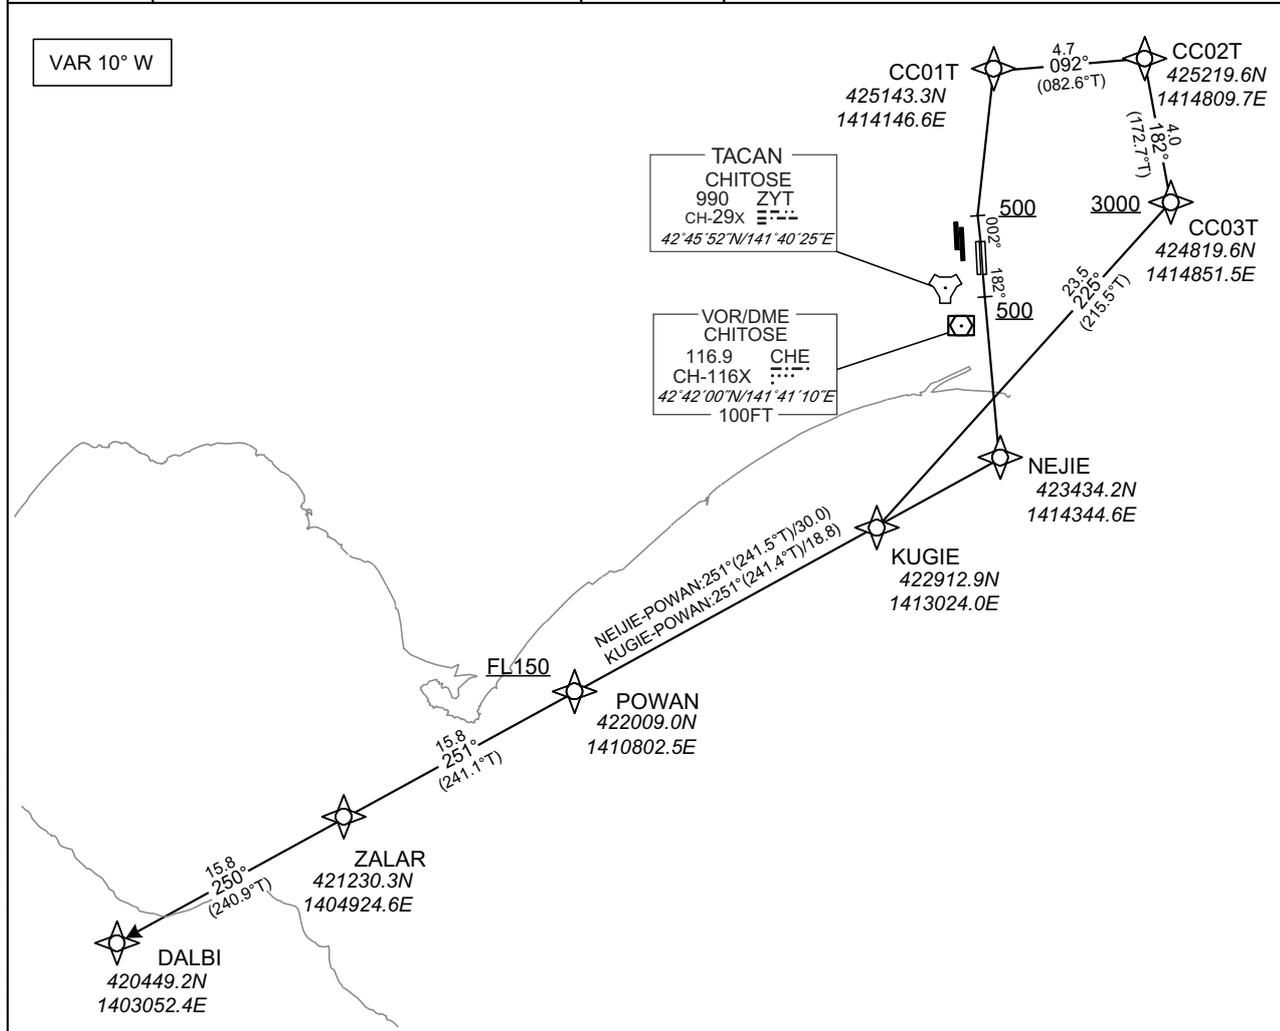

CHANGE : Description of VAR and PROC name.

RWAY01L/01R : Climb on HDG002° at or above 500FT, direct to CC01T, to CC02T, to CC03T at or above 3000FT, to KUGIE, to POWAN at or above FL150, to ZALAR, to DALBI.  
 RWAY19R/19L : Climb on HDG182° at or above 500FT, direct to NEJIE, to POWAN at or above FL150, to ZALAR, to DALBI.  
 Note : 5.0% climb gradient required up to 500FT.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV SID

DALBI ONE DEPARTURE

RWY01L/01R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	-	002 (352.6)	-9.5	-	-	+500	-	-	RNAV1
002	DF	CC01T	-	—	-9.5	-	-	-	-	-	RNAV1
003	TF	CC02T	-	092 (082.6)	-9.5	4.7	-	-	-	-	RNAV1
004	TF	CC03T	-	182 (172.7)	-9.5	4.0	-	+3000	-	-	RNAV1
005	TF	KUGIE	-	225 (215.5)	-9.5	23.5	-	-	-	-	RNAV1
006	TF	POWAN	-	251 (241.4)	-9.5	18.8	-	+FL 150	-	-	RNAV1
007	TF	ZALAR	-	251 (241.1)	-9.5	15.8	-	-	-	-	RNAV1
008	TF	DALBI	-	250 (240.9)	-9.5	15.8	-	-	-	-	RNAV1

RWY19R/19L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	-	182 (172.6)	-9.5	-	-	+500	-	-	RNAV1
002	DF	NEJIE	-	—	-9.5	-	-	-	-	-	RNAV1
003	TF	POWAN	-	251 (241.5)	-9.5	30.0	-	+FL 150	-	-	RNAV1
004	TF	ZALAR	-	251 (241.1)	-9.5	15.8	-	-	-	-	RNAV1
005	TF	DALBI	-	250 (240.9)	-9.5	15.8	-	-	-	-	RNAV1


CHANGE : New PROC

STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV TRANSITION

<b>PANSY TRANSITION/BUTOS TRANSITION</b>		<b>RNAV 1</b>
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	-
	DME GAP	-
	Inappropriate NavAids	See AD1.1.6.10.3 Inappropriate NAVAIDs for RNAV1

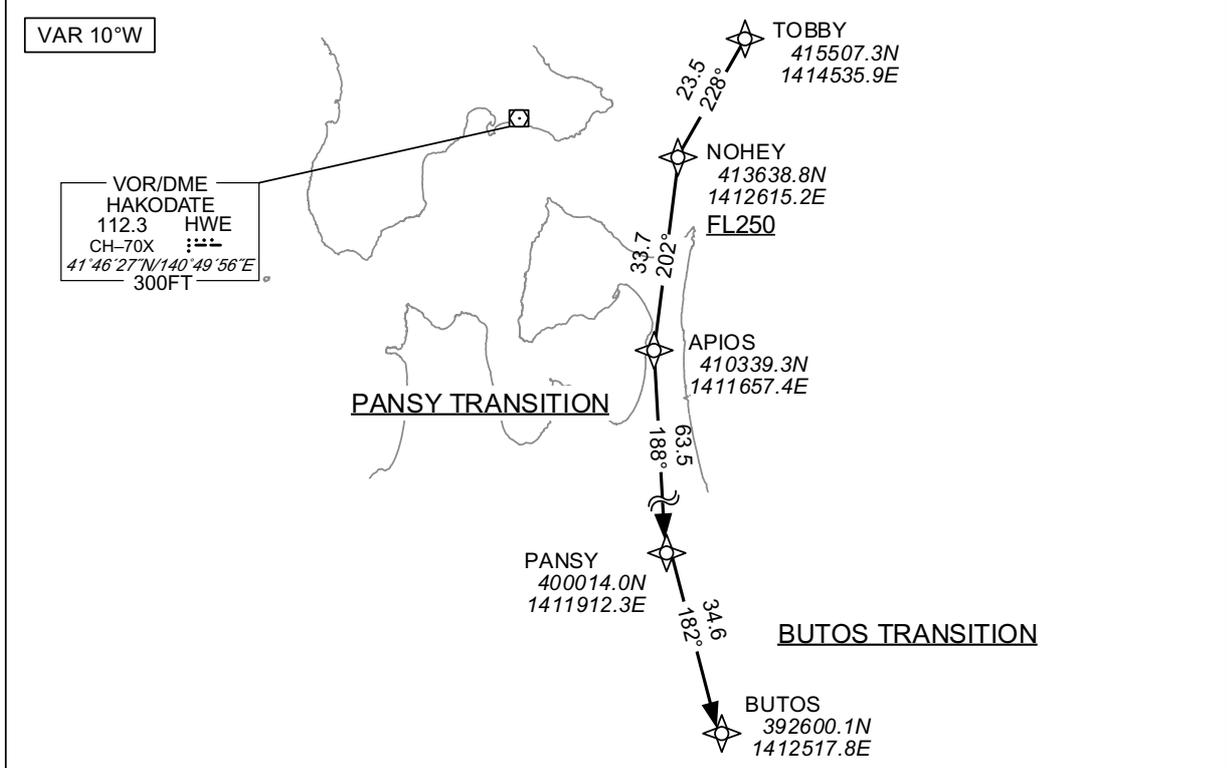

**PANSY TRANSITION**

From TOBBY, to NOHEY at or above FL250, to APIOS, to PANSY.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TOBBY	-	-	-9.5	-	-	-	-	-	RNAV1
002	TF	NOHEY	-	228 (218.1)	-9.5	23.5	-	+FL250	-	-	RNAV1
003	TF	APIOS	-	202 (192.0)	-9.5	33.7	-	-	-	-	RNAV1
004	TF	PANSY	-	188 (178.4)	-9.5	63.5	-	-	-	-	RNAV1

**BUTOS TRANSITION**

From TOBBY, to NOHEY at or above FL250, to APIOS, to PANSY, to BUTOS.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TOBBY	-	-	-9.5	-	-	-	-	-	RNAV1
002	TF	NOHEY	-	228 (218.1)	-9.5	23.5	-	+FL250	-	-	RNAV1
003	TF	APIOS	-	202 (192.0)	-9.5	33.7	-	-	-	-	RNAV1
004	TF	PANSY	-	188 (178.4)	-9.5	63.5	-	-	-	-	RNAV1
005	TF	BUTOS	-	182 (172.2)	-9.5	34.6	-	-	-	-	RNAV1


CHANGE : Description of VAR.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE

RNAV TRANSITION

SHUYU TRANSITION		RNAV1
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	-
	DME GAP	-
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

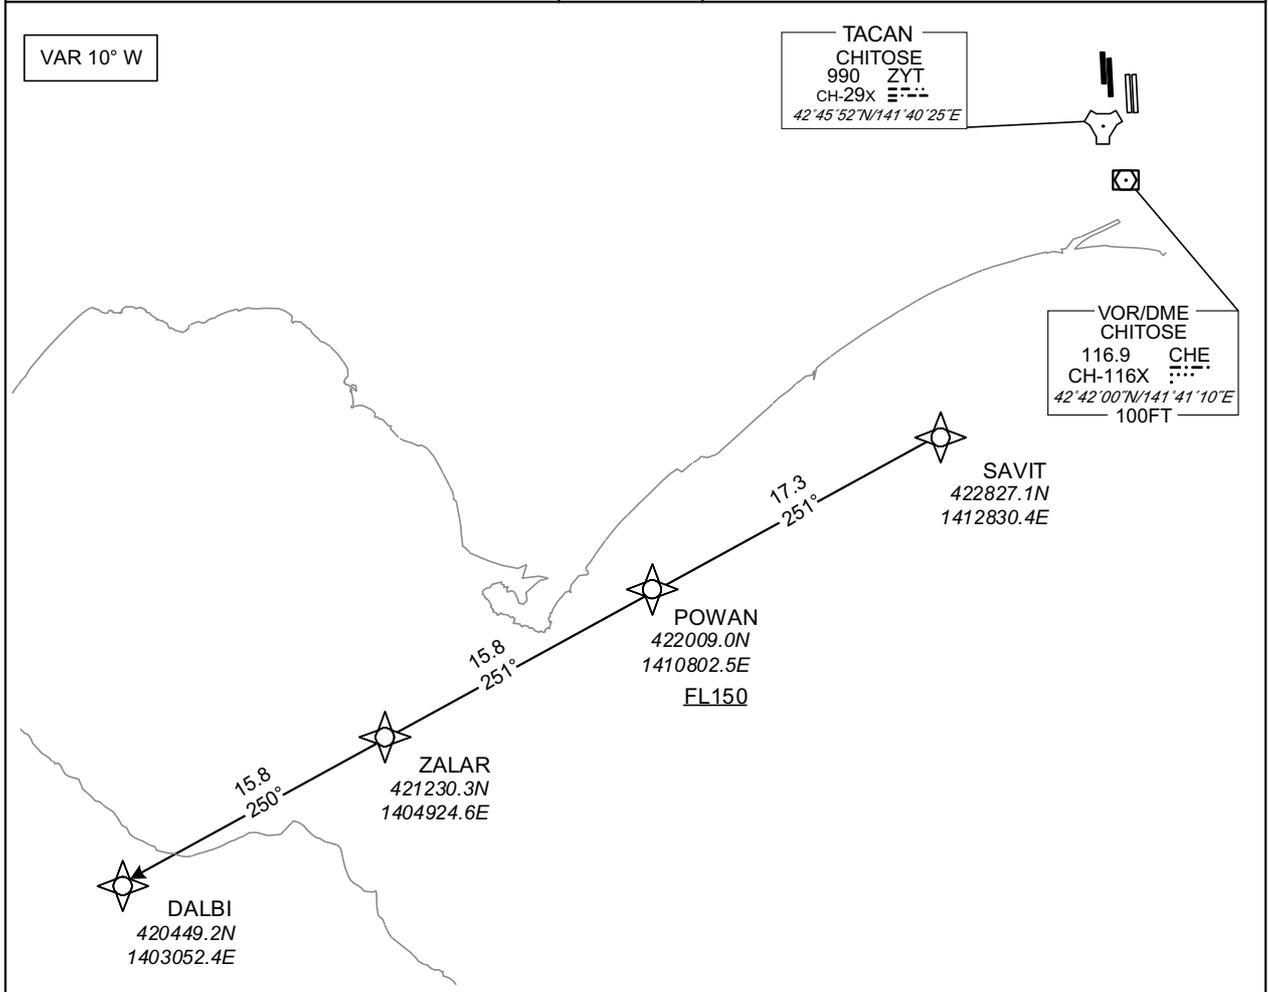

From SAVIT, to POWAN at or above FL150, to ZALAR, to DALBI.

CHANGE : Description of VAR and PROC name.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SAVIT	-	-	-9.5	-	-	-	-	-	RNAV1
002	TF	POWAN	-	251 (241.3)	-9.5	17.3	-	+FL150	-	-	RNAV1
003	TF	ZALAR	-	251 (241.1)	-9.5	15.8	-	-	-	-	RNAV1
004	TF	DALBI	-	250 (240.9)	-9.5	15.8	-	-	-	-	RNAV1

STANDARD DEPARTURE CHART-INSTRUMENT

RJCC / NEW CHITOSE


RNAV TRANSITION

FUNKA TRANSITION		RNAV1
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	MRE : 12.0NM to FUNKA - FUNKA
	DME GAP	-
	Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 10° W

TACAN  
CHITOSE  
990 ZYT  
CH-29X   
42°45'52"N/141°40'25"E

VOR/DME  
CHITOSE  
116.9 CHE   
CH-116X   
42°42'00"N/141°41'10"E  
100FT

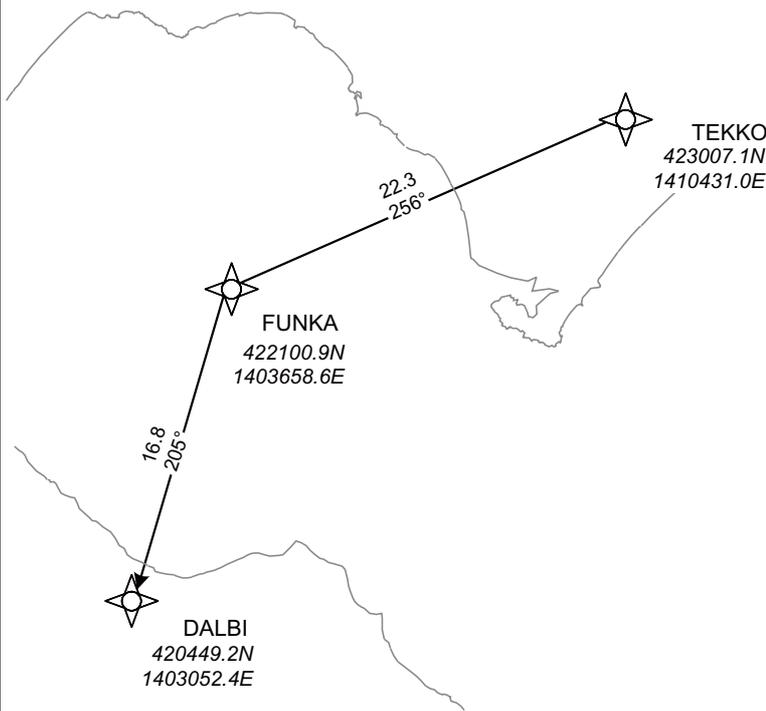

CHANGE : Description of VAR and PROC name.

From TEKKO, to FUNKA, to DALBI.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TEKKO	-	-	-9.5	-	-	-	-	-	RNAV1
002	TF	FUNKA	-	256 (246.0)	-9.5	22.3	-	-	-	-	RNAV1
003	TF	DALBI	-	205 (195.6)	-9.5	16.8	-	-	-	-	RNAV1