


| | | |
|--|------------------------|--|
| WAAS CH 65702 W17A | APP CRS 170° | Rwy Idg 10008 TDZE 3666 Apt Elev 3671 |
|--|------------------------|--|

RNAV (GPS) RWY 17



ROSWELL AIR CENTER (ROW)

| | |
|---|---|
| RNP APCH - GPS. | MISSED APPROACH: Climb to 6000 direct KIGDE and hold. |
| <p>⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 3996 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4083 feet; increase all MDAs 80 feet and visibility LNAV Cat C ¼ SM and Circling Cat D ¼ SM. VDP and Baro-VNAV NA when using Artesia altimeter setting.</p> | |

| | | | | | |
|-----------------------------|--|---|-------------------------------|-----------------------------------|-------------------------|
| ATIS 128.45 306.2 | ROSWELL APP CON* 119.6 239.0 | ROSWELL TOWER* 118.5 (CTAF) 0 233.7 | GND CON 121.9 348.6 | CLNC DEL 132.875 282.25 | UNICOM 122.95 |
|-----------------------------|--|---|-------------------------------|-----------------------------------|-------------------------|

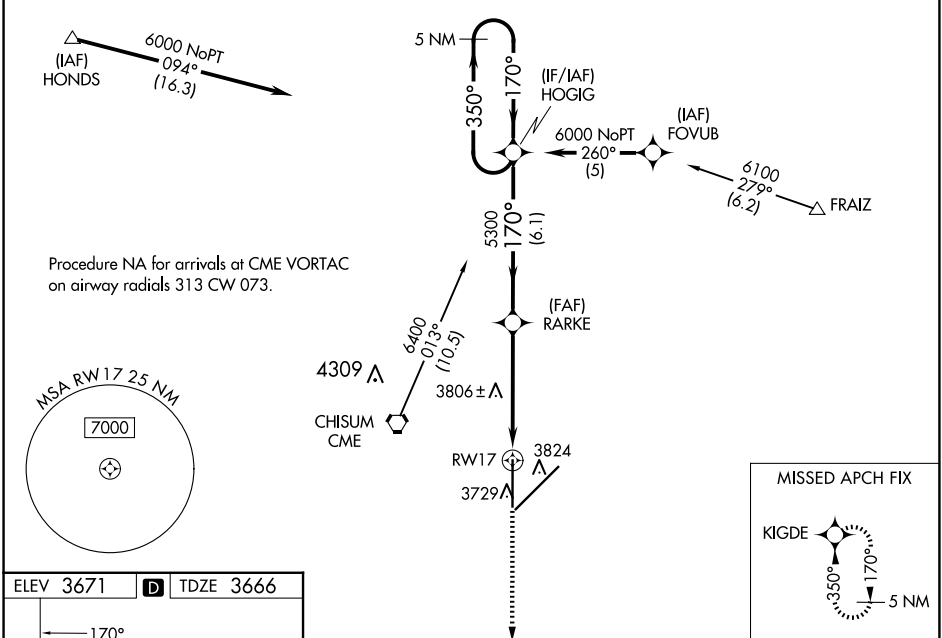

| | | |
|-----------|----------|-----------|
| ELEV 3671 | D | TDZE 3666 |
|-----------|----------|-----------|

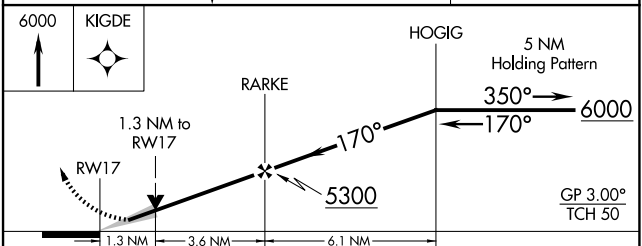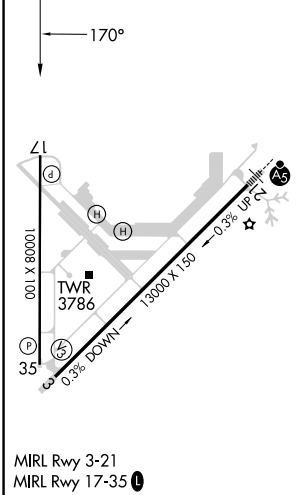

| CATEGORY | A | B | C | D |
|--------------|----------------------------|-----------------|-------------------------------|-------------------------------|
| LPV DA | 3916-3/4 250 (300-3/4) | | | |
| LNAV/VNAV DA | 4003-1 1/4 337 (400-1 1/4) | | | |
| LNAV MDA | 4120-1 | 454 (500-1) | 4120-1 1/4 454 (500-1 1/4) | 4120-1 1/2 454 (500-1 1/2) |
| CIRCLING | 4140-1 1/4 | 469 (500-1 1/4) | 4140-1 1/2 469 (500-1 1/2) | 4300-2 629 (700-2) |

SW-1, 20 MAR 2025 to 17 APR 2025

SW-1, 20 MAR 2025 to 17 APR 2025