

WAAS
CH **72720**
W16A



APP CRS
157°

Rwy Idg
TDZE **167**
Apt Elev **168**

RNAV (GPS) Z RWY 16

RICHMOND INTL (RIC)

RNP APCH		MALSR		MISSED APPROACH: Climb to 2500 direct HAGLI and hold.	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). For inop ALS increase LNAV/VNAV all Cats visibility to RVR 5400. ** RVR 1800 authorized with use of FD or AP or HUD to DA.					
ATIS 119.15 263.025	POTOMAC APP CON 126.4 282.375 (001°-185°) 126.75 307.2 (186°-360°)	RICHMOND TOWER 121.1 257.8	GND CON 121.9 348.6	CLNC DEL 127.55 348.6	

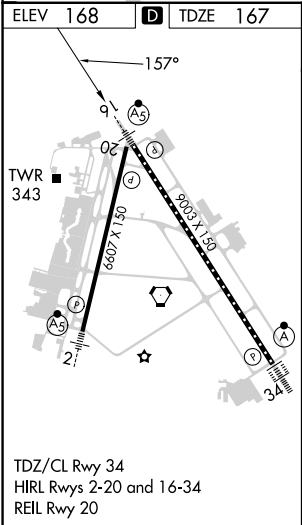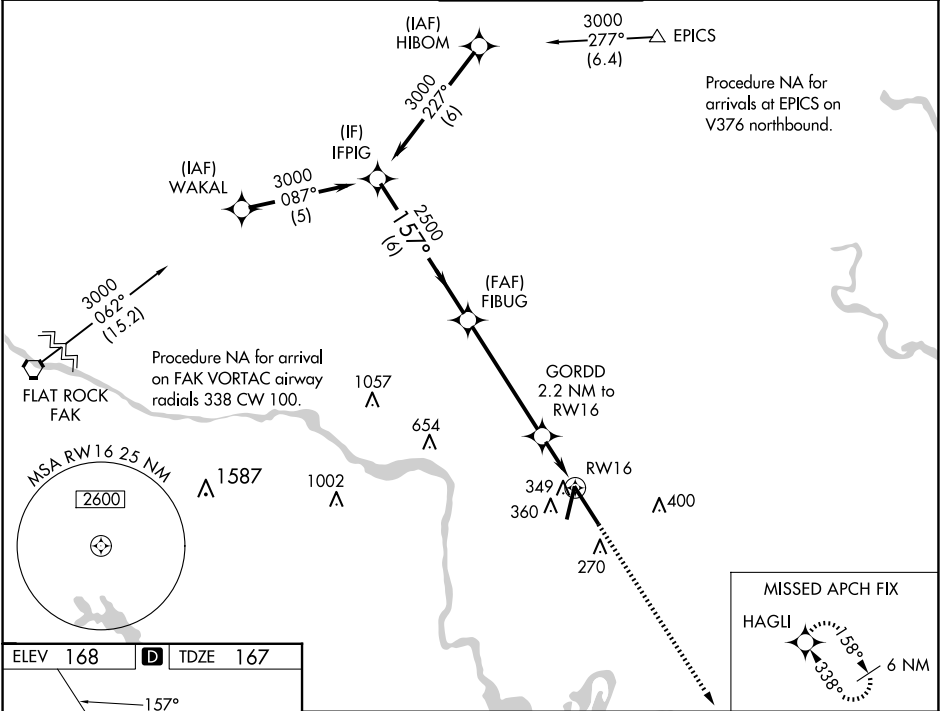

IFPIG 3000 GP 3.00° TCH 54 FIBUG 2500 GORDD 2.2 NM to RW16 920* *1.2 NM to RW16 RW16 VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71). 2500 ↑ HAGLI ✦ *LNAV only.				
157° 6 NM 5 NM 1 NM 1.2 NM				
CATEGORY	A	B	C	D
LPV DA **	367/24 200 (200-½)			
LNAV/ VNAV DA	504/31 337 (400-¾)			
LNAV MDA	600/24 433 (500-½)		600/40 433 (500-¾)	
 CIRCLING	660-1	492 (500-1)	700-1½ 532 (600-1½)	720-2 552 (600-2)