

STANDARD DEPARTURE CHART-INSTRUMENT


RJTT/TOKYO INTL

RNAV SID

RUTAS FOUR DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off rolling. 2) RADAR service required.		RWY16R : HME 1.2NM FM DER - 1.9NM to T6R11 RWY16L : HME 1.0NM FM DER - 2.4NM to T6L21 RWY34R : HME 1.0NM FM DER - 2.5NM to TT502 RWY34L : HME 0.5NM FM DER - 2.5NM to TT502 RWY04 : HME 1.7NM FM DER - 2.5NM to TT502 RWY05 : HME DER - 2.7NM to TT502
DME GAP	Critical DME	
Inappropriate Nav aids	See AD1.1.6.10.3.Inappropriate NAVAIDs for RNAV1	

VAR8°W

VOR/DME  
HANEDA  
112.2 HME  
CH-59X  
35°33'44"N/139°45'40"E  
100FT

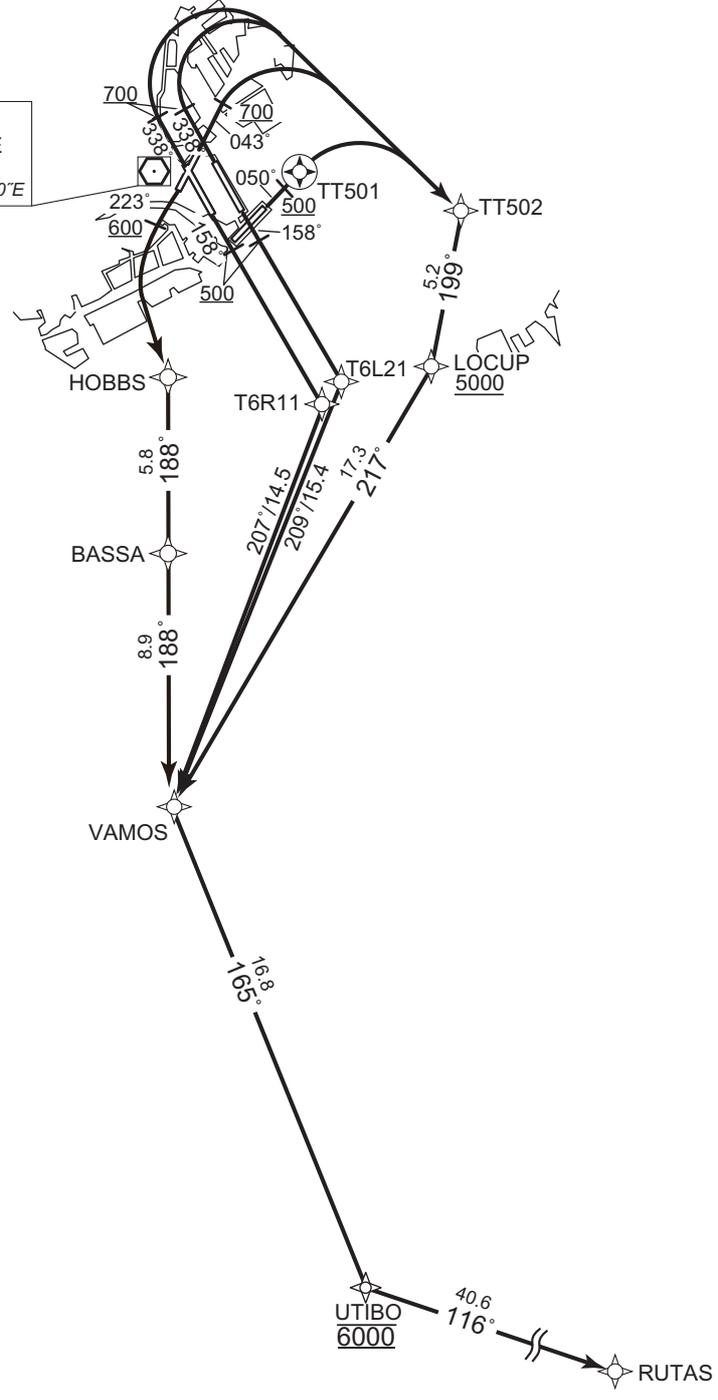

CHANGE : PROC renamed. PROC course. DME GAP.

## STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RUTAS FOUR DEPARTURE

RWY16R : Climb on HDG 158° at or above 500FT, direct to T6R11,  
to VAMOS, to UTIBO at 6000FT, to RUTAS.

RWY16L : Climb on HDG 158° at or above 500FT, direct to T6L21,  
to VAMOS, to UTIBO at 6000FT, to RUTAS.

RWY34L/34R : Climb on HDG 338° at or above 700FT, turn right direct to  
TT502, to LOCUP at or above 5000FT, to VAMOS,  
to UTIBO at 6000FT, to RUTAS.

RWY04: Climb on HDG 043° at or above 700FT, turn right direct to TT502,  
to LOCUP at or above 5000FT, to VAMOS, to UTIBO at 6000FT,  
to RUTAS.

RWY05: Climb on HDG 050° at or above 500FT, direct to TT501, turn right  
direct to TT502, to LOCUP at or above 5000FT, to VAMOS, to  
UTIBO at 6000FT, to RUTAS.

RWY22 : Climb on HDG 223° at or above 600FT, turn left direct to HOBBS,  
to BASSA, to VAMOS, to UTIBO at 6000FT, to RUTAS.

Note RWY34L/34R/04 : 5.0% climb gradient required up to 700FT.

RWY05 : 5.0% climb gradient required up to 500FT.

RWY22 : 5.0% climb gradient required up to 600FT.

CHANGE : PROC renamed. PROC course and Note FM RWY22 established.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RUTAS FOUR DEPARTURE

RWY16R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.9	-	-	+500	-	-	RNAV1
002	DF	T6R11	-	-	-7.9	-	-	-	-	-	RNAV1
003	TF	VAMOS	-	207 (199.5)	-7.9	14.5	-	-	-	-	RNAV1
004	TF	UTIBO	-	165 (157.0)	-7.9	16.8	-	6000	-	-	RNAV1
005	TF	RUTAS	-	116 (108.4)	-7.9	40.6	-	-	-	-	RNAV1

RWY16L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	158 (150.0)	-7.9	-	-	+500	-	-	RNAV1
002	DF	T6L21	-	-	-7.9	-	-	-	-	-	RNAV1
003	TF	VAMOS	-	209 (200.7)	-7.9	15.4	-	-	-	-	RNAV1
004	TF	UTIBO	-	165 (157.0)	-7.9	16.8	-	6000	-	-	RNAV1
005	TF	RUTAS	-	116 (108.4)	-7.9	40.6	-	-	-	-	RNAV1

RWY34L/RWY34R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	338 (330.0)	-7.9	-	-	+700	-	-	RNAV1
002	DF	TT502	-	-	-7.9	-	R	-	-	-	RNAV1
003	TF	LOCUP	-	199 (190.9)	-7.9	5.2	-	+5000	-	-	RNAV1
004	TF	VAMOS	-	217 (209.5)	-7.9	17.3	-	-	-	-	RNAV1
005	TF	UTIBO	-	165 (157.0)	-7.9	16.8	-	6000	-	-	RNAV1
006	TF	RUTAS	-	116 (108.4)	-7.9	40.6	-	-	-	-	RNAV1

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	043 (034.9)	-7.9	-	-	+700	-	-	RNAV1
002	DF	TT502	-	-	-7.9	-	R	-	-	-	RNAV1
003	TF	LOCUP	-	199 (190.9)	-7.9	5.2	-	+5000	-	-	RNAV1
004	TF	VAMOS	-	217 (209.5)	-7.9	17.3	-	-	-	-	RNAV1
005	TF	UTIBO	-	165 (157.0)	-7.9	16.8	-	6000	-	-	RNAV1
006	TF	RUTAS	-	116 (108.4)	-7.9	40.6	-	-	-	-	RNAV1

CHANGE : PROC renamed.

STANDARD DEPARTURE CHART-INSTRUMENT

RJTT/TOKYO INTL

RNAV SID

RWY05

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	050 (042.4)	-7.9	-	-	+500	-	-	RNAV1
002	DF	TT501	Y	-	-7.9	-	-	-	-	-	RNAV1
003	DF	TT502	-	-	-7.9	-	R	-	-	-	RNAV1
004	TF	LOCUP	-	199 (190.9)	-7.9	5.2	-	+5000	-	-	RNAV1
005	TF	VAMOS	-	217 (209.5)	-7.9	17.3	-	-	-	-	RNAV1
006	TF	UTIBO	-	165 (157.0)	-7.9	16.8	-	6000	-	-	RNAV1
007	TF	RUTAS	-	116 (108.4)	-7.9	40.6	-	-	-	-	RNAV1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	223 (214.9)	-7.9	-	-	+600	-	-	RNAV1
002	DF	HOBBS	-	-	-7.9	-	L	-	-	-	RNAV1
003	TF	BASSA	-	188 (179.9)	-7.9	5.8	-	-	-	-	RNAV1
004	TF	VAMOS	-	188 (179.9)	-7.9	8.9	-	-	-	-	RNAV1
005	TF	UTIBO	-	165 (157.0)	-7.9	16.8	-	6000	-	-	RNAV1
006	TF	RUTAS	-	116 (108.4)	-7.9	40.6	-	-	-	-	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
BASSA	352108.8N / 1394542.2E	T6R11	352552.5N / 1395137.2E
HOBBS	352653.9N / 1394541.3E	TT501	353328.7N / 1395029.9E
LOCUP	352718.8N / 1395608.5E	TT502	353224.4N / 1395720.7E
RUTAS	344349.3N / 1404034.2E	UTIBO	345647.0N / 1395343.9E
T6L21	352639.1N / 1395222.0E	VAMOS	351215.5N / 1394543.6E

CHANGE : RWY22 established. BASSA, HOBBS added.