WAAS CH 70611 W04B	APP CRS 046°	Rwy ldg 7200 TDZE 260 Apt Elev 266

RNAV (GPS) RWY 4R
BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

RNP APCH-GPS.

Rwy 4R helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LPV all Cats visibility to RVR 4500, LNAV/VNAV all Cats visibility to 1⅜ SM and LNAV Cat A/B visibility to RVR 5500 and Cat C/D to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 2900 direct RIRIW and on track 047° to BRAUM and hold.

D-ATIS	LITTLE ROCK APP CON	ADAMS TOWER	GND CON	CLNC DEL
125.65	135.4 353.6	118.7 257.8	121.9 339.8	118.95

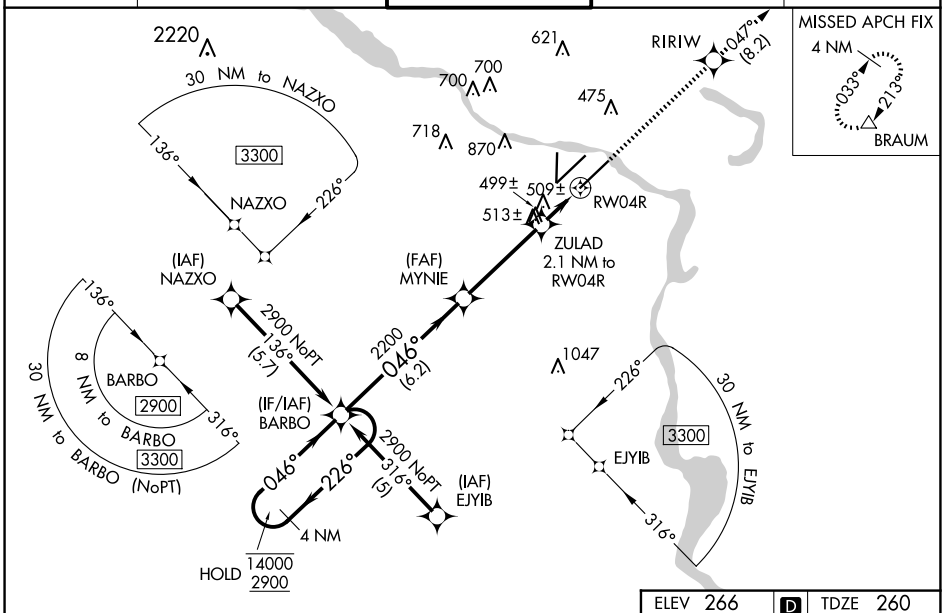

ELEV 266 | D | TDZE 260

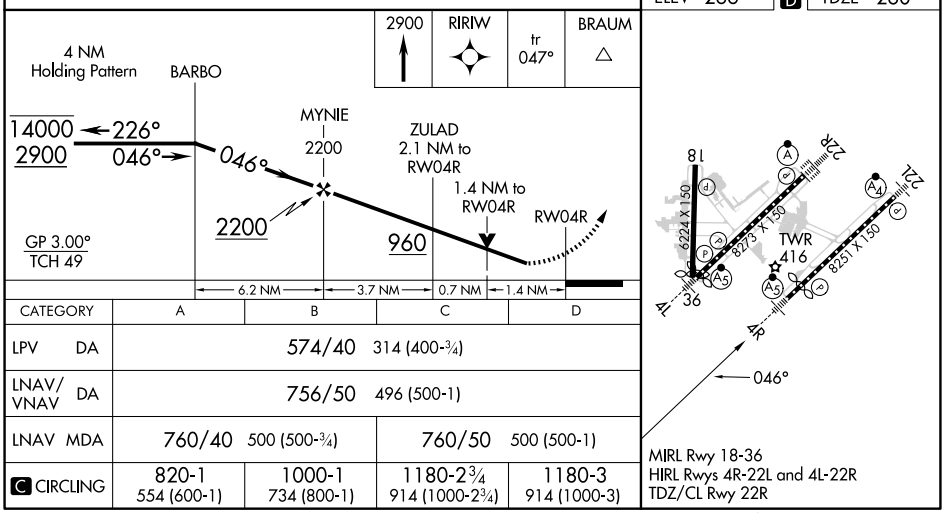

CATEGORY	A	B	C	D
LPV DA	574/40 314 (400-¾)			
LNAV/VNAV DA	756/50 496 (500-1)			
LNAV MDA	760/40 500 (500-¾)		760/50 500 (500-1)	
C CIRCLING	820-1 554 (600-1)	1000-1 734 (800-1)	1180-2¾ 914 (1000-2¾)	1180-3 914 (1000-3)

SC-1, 20 MAR 2025 to 17 APR 2025