

LOC/DME I-BLY 110.3 Chan 40	APP CRS 191°	Rwy 19R Idg 9205 TDZE 672 Apt Elev 728	Rwy 19L Idg 4182 TDZE 674 Apt Elev 728
---	------------------------	---	---

ILS or LOC RWY 19R
GENERAL MITCHELL INTL(MKE)


RADAR required for procedure entry, RADAR or DME required for LOC only.

T For inop ALS, increase S-LOC 19R Cats C and D visibility to 1 $\frac{3}{8}$ SM.
*RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR
Rwy 19R

MISSED APPROACH: Climb to 2800 then right turn direct BAE VOR/DME and hold.

D-ATIS 126.4	MILWAUKEE APP CON 126.5 307.0	MILWAUKEE TOWER 124.575 269.05	GND CON 121.8 263.125	CLNC DEL 120.8	CPDLC
-----------------	----------------------------------	-----------------------------------	--------------------------	-------------------	-------

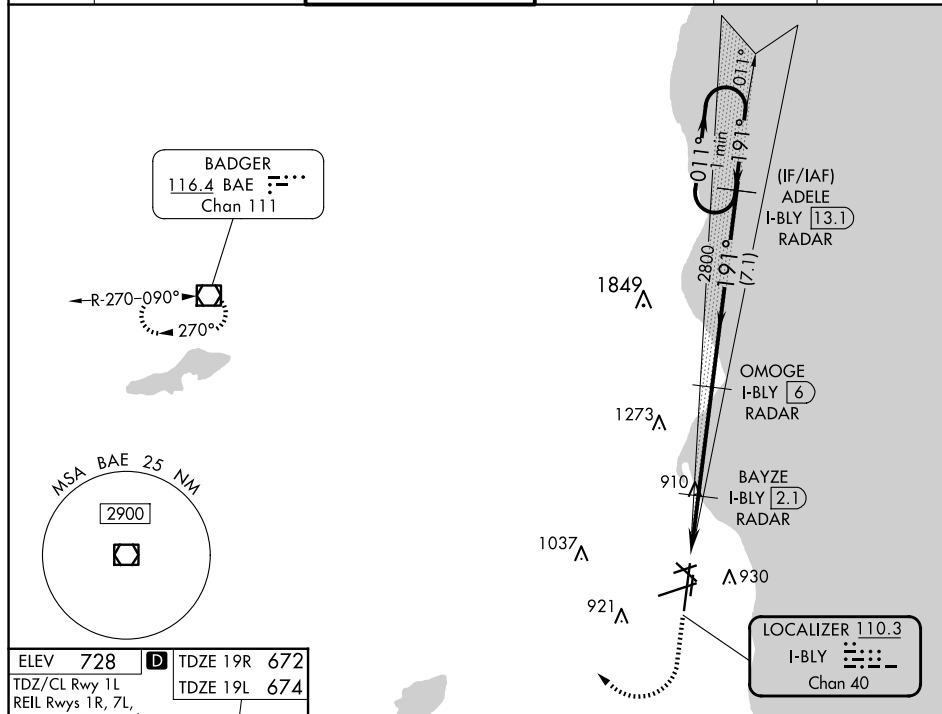

ELEV 728	D	TDZE 19R 672
TDZ/CL Rwy 1L		TDZE 19L 674
REIL Rwy 1R, 7L, 13, 25L, 25R, and 31		



HIRL Rwy's 1L-19R and 7R-25L
MIRL Rwy's 1R-19L, 13-31, and 7L-25R

FAF to MAP 6.5 NM					
Knots	60	90	120	150	180
Min:Sec	6:30	4:20	3:15	2:36	2:10

MILWAUKEE, WISCONSIN

Amdt 13B 20FEB25

[illegible]

CATEGORY	A	B	C	D
S-1LS 19R*	872/24		200 (200-½)	
S-LOC 19R	1160/24	488 (500-½)	1160/50	488 (500-1)
SIDESTEP 19L	1160-1	486 (500-1)	1160-1½ 486 (500-1½)	1160-2 486 (500-2)
C CIRCLING	1240-1	512 (600-1)	1240-1½ 512 (600-½)	1360-2 632 (700-2)

Amdt 13B 20FEB25

42°57'N-87°54'W

GENERAL MITCHELL INTL (MKE)
ILS or LOC RWY 19R