

# STANDARD DEPARTURE CHART-INSTRUMENT

VAR5.8° W

D-ATIS(English) 127.85 D-ATIS(Chinese) 128.65

TWR01 118.8(118.325) 17L/35R, 17R/35L  
 TWR02 118.4(118.725) 16L/34R, 16R/34L  
 TWR03 124.35(118.325) 17L/35R  
 TWR04 118.575(118.725) 16R/34L

APP01 120.3(119.75)  
 APP02 125.4(124.05)  
 APP03 125.85(119.2)  
 APP04 123.8(119.2)  
 APP05 126.65(128.05)  
 APP06 126.3(120.65)

APP07 121.1(119.75)  
 APP08 127.75(124.05)  
 APP09 121.375(128.05)  
 APP10 125.625(120.65)  
 APP11 119.075(128.05)

## ZSPD SHANGHAI/Pudong

RWY16L/16R/17L/17R  
 (NXD/SASAN/ADBAS)

BEARINGS ARE MAGNETIC.  
 ALTITUDES, ELEVATIONS  
 AND HEIGHTS IN METERS.  
 DME DISTANCES IN  
 NAUTICAL MILES.  
 DISTANCES IN KM.


TL 3600  
 TA 3000  
 3300(QNH ≥ 1031hPa)  
 2700(QNH ≤ 979hPa)



NOT TO SCALE

Departure turn MAX IAS 460km/h

Note: Departure turn before DER is forbidden.

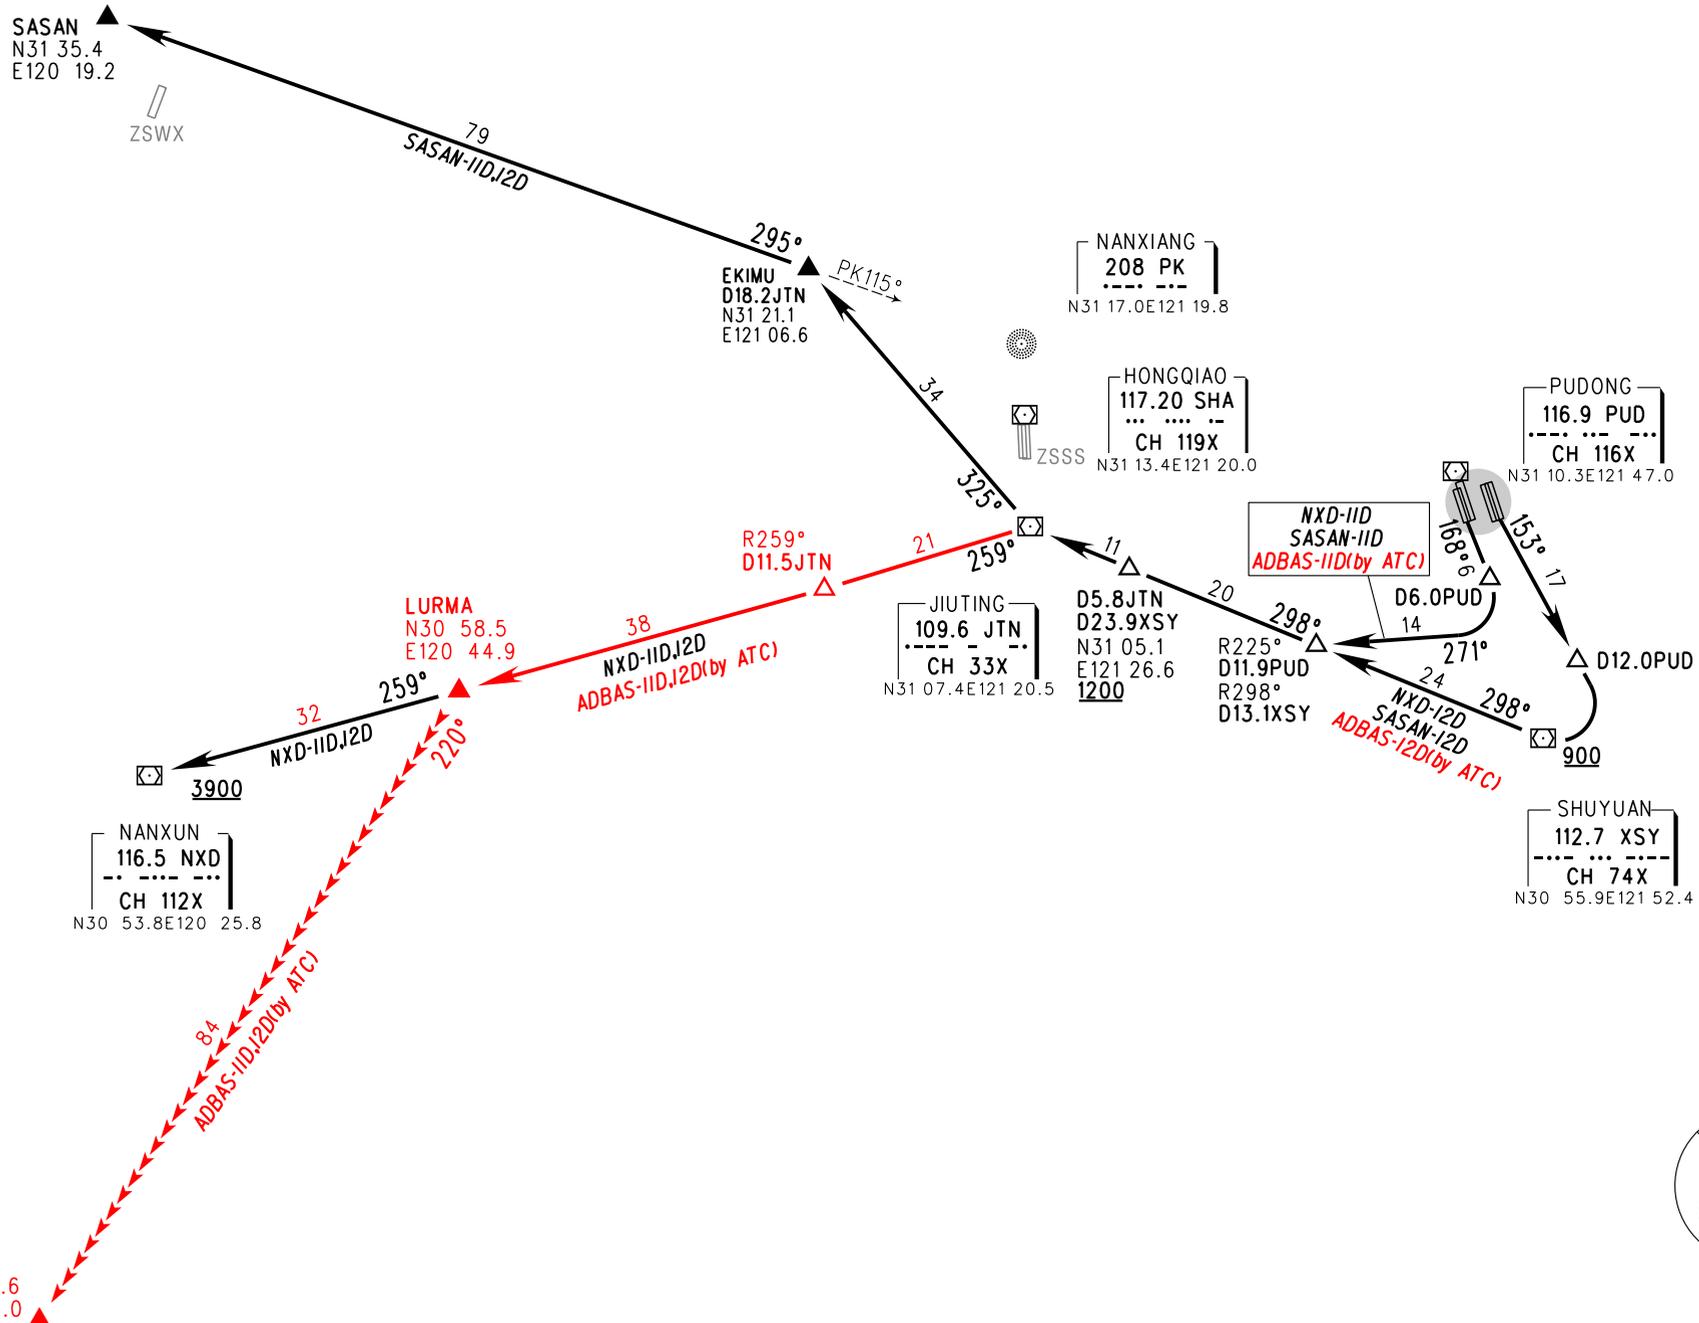

Changes: Procedure.