

STANDARD DEPARTURE CHART - INSTRUMENT


RJBB / KANSAI INTL

RNAV SID

OBLUR ONE DEPARTURE

RNP1

Note GNSS required.

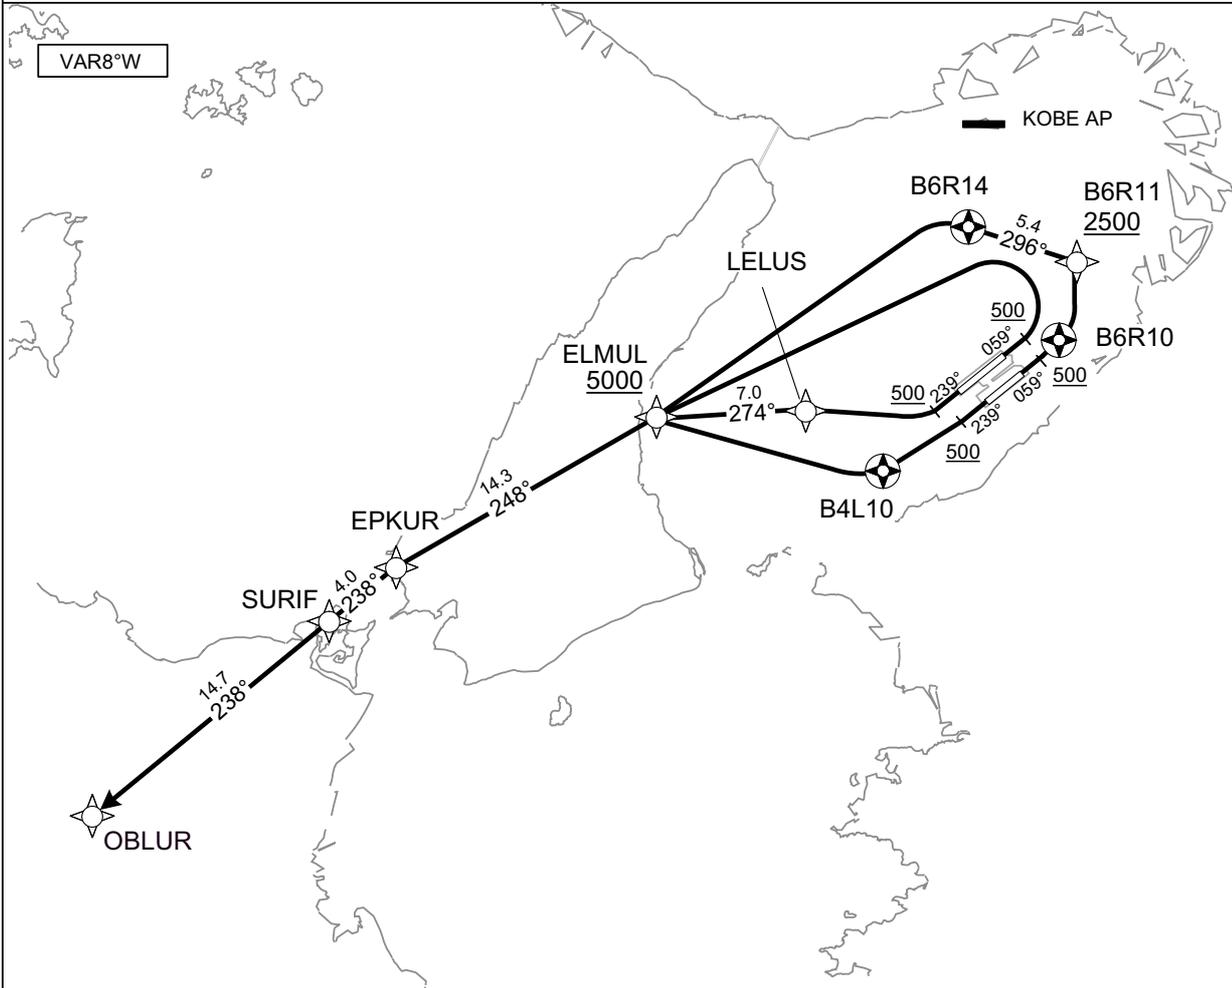

- RWY06R : Climb on HDG059° at or above 500FT, direct to B6R10, turn left direct to B6R11 at or above 2500FT, to B6R14, turn left direct to ELMUL at or above 5000FT, to EPKUR, to SURIF, to OBLUR.
- RWY06L : Climb on HDG059° at or above 500FT, turn left direct to ELMUL at or above 5000FT, to EPKUR, to SURIF, to OBLUR.
- RWY24R : Climb on HDG239° at or above 500FT, turn right direct to LELUS, to ELMUL at or above 5000FT, to EPKUR, to SURIF, to OBLUR.
- RWY24L : Climb on HDG239° at or above 500FT, direct to B4L10, turn right direct to ELMUL at or above 5000FT, to EPKUR, to SURIF, to OBLUR.

Note RWY06R/06L/24R/24L : 5.0% climb gradient required up to 500FT.

CHANGE : New PROC.

STANDARD DEPARTURE CHART - INSTRUMENT

RJBB / KANSAI INTL

RNAV SID

OBLUR ONE DEPARTURE

**RWY06R**

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	059 (050.9)	-8.1	—	—	+500	—	—	RNP1
002	DF	B6R10	Y	—	-8.1	—	—	—	—	—	RNP1
003	DF	B6R11	—	—	-8.1	—	L	+2500	—	—	RNP1
004	TF	B6R14	Y	296 (287.8)	-8.1	5.4	—	—	—	—	RNP1
005	DF	ELMUL	—	—	-8.1	—	L	+5000	—	—	RNP1
006	TF	EPKUR	—	248 (240.1)	-8.1	14.3	—	—	—	—	RNP1
007	TF	SURIF	—	238 (230.0)	-8.1	4.0	—	—	—	—	RNP1
008	TF	OBLUR	—	238 (230.0)	-8.1	14.7	—	—	—	—	RNP1

**RWY06L**

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	059 (050.9)	-8.1	—	—	+500	—	—	RNP1
002	DF	ELMUL	—	—	-8.1	—	L	+5000	—	—	RNP1
003	TF	EPKUR	—	248 (240.1)	-8.1	14.3	—	—	—	—	RNP1
004	TF	SURIF	—	238 (230.0)	-8.1	4.0	—	—	—	—	RNP1
005	TF	OBLUR	—	238 (230.0)	-8.1	14.7	—	—	—	—	RNP1

**RWY24R**

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	239 (230.9)	-8.1	—	—	+500	—	—	RNP1
002	DF	LELUS	—	—	-8.1	—	R	—	—	—	RNP1
003	TF	ELMUL	—	274 (266.4)	-8.1	7.0	—	+5000	—	—	RNP1
004	TF	EPKUR	—	248 (240.1)	-8.1	14.3	—	—	—	—	RNP1
005	TF	SURIF	—	238 (230.0)	-8.1	4.0	—	—	—	—	RNP1
006	TF	OBLUR	—	238 (230.0)	-8.1	14.7	—	—	—	—	RNP1

**RWY24L**

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	239 (230.9)	-8.1	—	—	+500	—	—	RNP1
002	DF	B4L10	Y	—	-8.1	—	—	—	—	—	RNP1
003	DF	ELMUL	—	—	-8.1	—	R	+5000	—	—	RNP1
004	TF	EPKUR	—	248 (240.1)	-8.1	14.3	—	—	—	—	RNP1
005	TF	SURIF	—	238 (230.0)	-8.1	4.0	—	—	—	—	RNP1
006	TF	OBLUR	—	238 (230.0)	-8.1	14.7	—	—	—	—	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
B6R10	342759.6N / 1351746.0E	ELMUL	342410.0N / 1345444.1E
B6R11	343140.8N / 1351845.1E	EPKUR	341700.9N / 1343944.0E
B6R14	343320.1N / 1351229.1E	SURIF	341426.6N / 1343601.7E
LELUS	342436.6N / 1350309.3E	OBLUR	340459.0N / 1342227.0E
B4L10	342136.9N / 1350734.5E		

CHANGE : New PROC.