

WAAS CH 93511 W02A	APP CRS 023°	Rwy Idg 6005 TDZE 433 Apt Elev 433
--	------------------------	---

RNAV (GPS) RWY 2



JACKSON RGNL (MKL)

RNP APCH - GPS.


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C.
 ▲ For inop ALS, increase visibility LNAV Cats A/B to 1 SM, and Cats C/D to 1 ½ SM.

MALSRL MISSED APPROACH: Climb to 3000 direct GARTZ and hold.

ASOS 119.325	MEMPHIS CENTER 134.65 316.15	JACKSON TOWER ★ 127.15 (CTAF) 0 249.95	GND CON 120.9	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

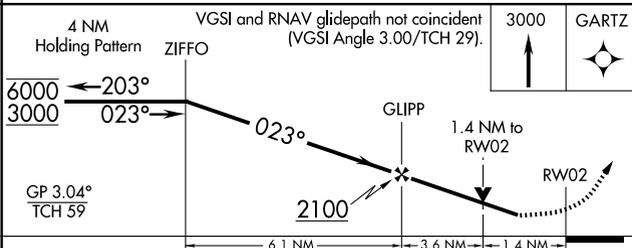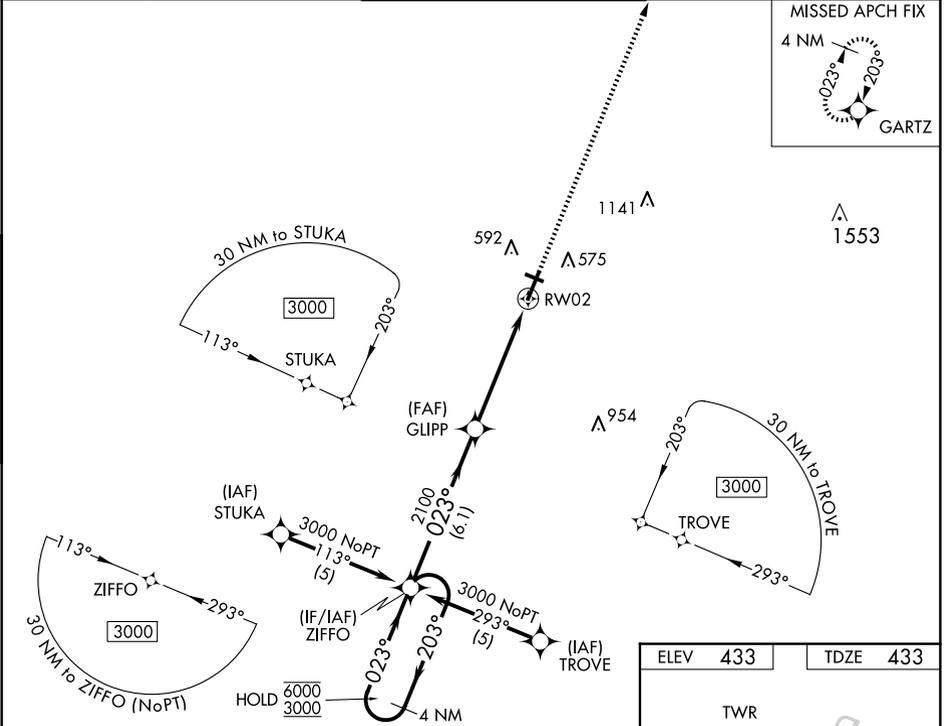

ELEV 433	TDZE 433
----------	----------

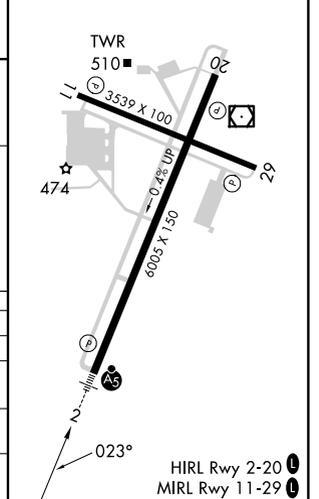

CATEGORY	A	B	C	D
LPV DA		772-¾	339 (400-¾)	
LNAV/VNAV DA		886-⅞	453 (500-⅞)	
LNAV MDA	900-¾ 467 (500-¾)		900-1 467 (500-1)	
CIRCLING	900-1 467 (500-1)	920-1 487 (500-1)	960-1½ 527 (600-1½)	1080-2 647 (700-2)

SE-1, 20 MAR 2025 to 17 APR 2025

SE-1, 20 MAR 2025 to 17 APR 2025