


STANDARD ARRIVAL CHART-INSTRUMENT ZUGY/KWE

4P-5


GUIYANG/Longdongbao
RNAV RWY19L/R(ELKAL)

VAR1.8°W AD ELEV 1138.9


D-ATIS 127.05	Guiyang Approach				Guiyang Tower	
	APP01 120.075 (119.45)	APP02 126.05 (119.45)	APP03 119.025 (119.725)	APP04 119.15 (119.725)	TWR 118.525 (118.05)	TWR 118.3 (118.05)
TL 3600 TA 3000 3300(QNH≥1031hPa) 2700(QNH≤979hPa)	1. Under radar control service actual ALT by ATC. 2. Holding procedure by ATC.				ELKAL-6W^{ATC} ELKAL-7X	



BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.



RNAV1 GNSS,RADAR REQUIRED	or RNP1 GNSS
------------------------------	--------------------

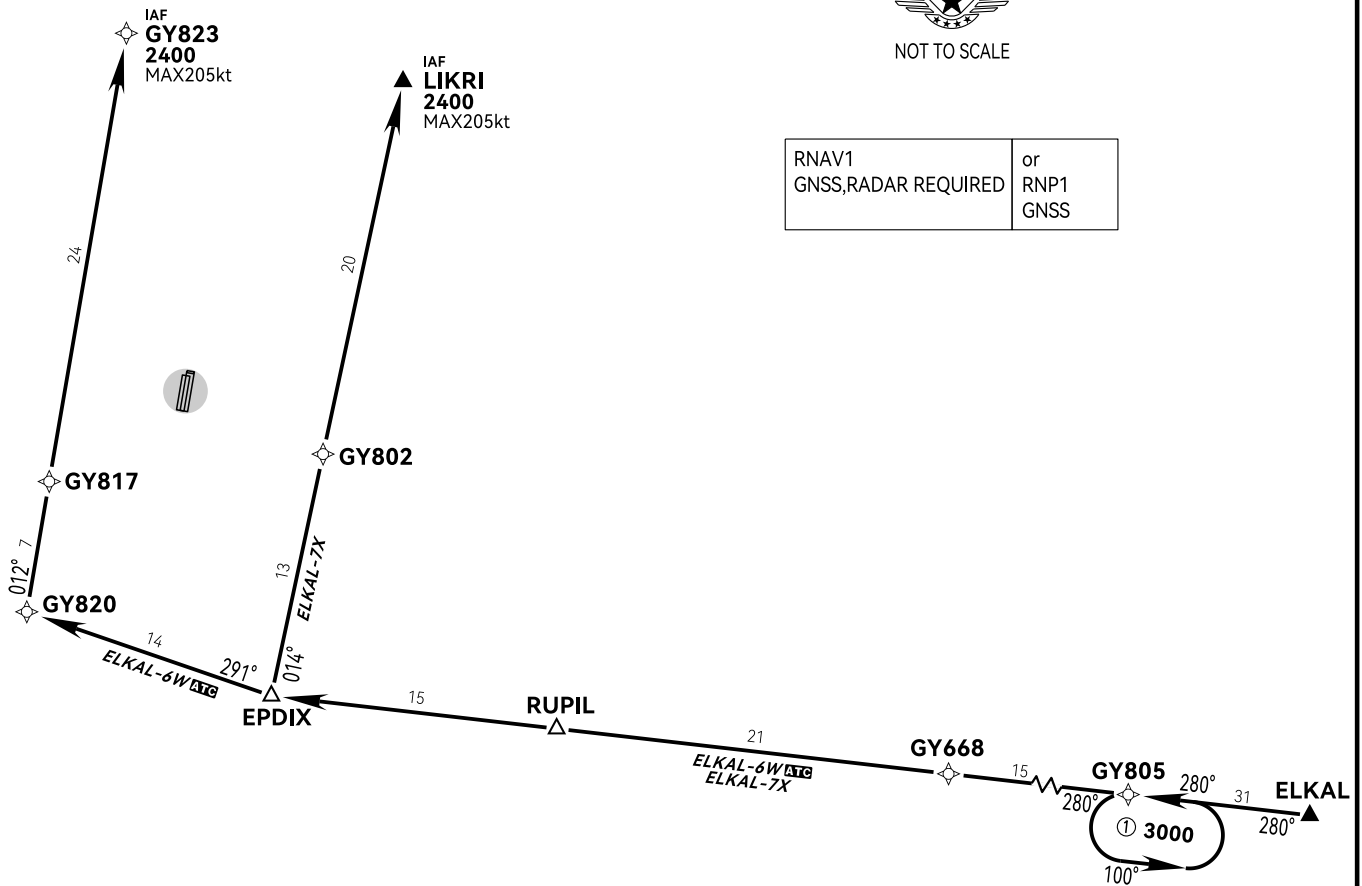

RWY	STAR	Database ID	ROUTING
19L,19R	ELKAL-7X	ELKA7X	ELKAL-GY805-GY668-RUPIL-EPDIX-GY802-LJKRI
	^{ATC} ELKAL-6W	^{ATC} ELKA6W	ELKAL-GY805-GY668-RUPIL-EPDIX-GY820-GY817-GY823

Changes: New chart.